


## Power SMD LED in PLCC-3 Package

### Description

The TLM.321. series is an advanced development in terms of heat dissipation.

The leadframe profile of this PLCC-3 SMD package is optimized to reduce the thermal resistance.

This allows higher drive current and doubles the light output compared to Vishay's high intensity SMD LED in PLCC-2 package.



19210

### Features

- Utilizing AlInGaP, OMA\* technology
- Angle of half intensity  $\pm \phi = 60^\circ$
- Available in 8 mm tape
- Luminous intensity, color and forward voltage categorized per packing unit
- Luminous intensity ratio per packing unit  
 $I_{Vmax}/I_{Vmin} \leq 1.6$
- ESD class 2
- Suitable for all soldering methods according to CECC
- Lead-free device



### Applications

Traffic Signals and Signs  
Interior and exterior automotive lighting  
Indicator and backlighting purposes for audio, video, LCD's switches, symbols, illuminated advertising etc.

\* Organic Mirror Advanced

### Parts Table

Part	Color, Luminous Intensity	Dominant Wavelength
TLMK3210	Red, $I_V \geq 1000$ mcd (typ. 1250 mcd)	611 nm to 622 nm

## Absolute Maximum Ratings

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

**TLMK32..**

Parameter	Test condition	Symbol	Value	Unit
Reverse voltage		$V_R$	5	V
Forward current		$I_F$	70	mA
Power dissipation	$T_{amb} \leq 65\text{ }^{\circ}\text{C}$ (290 K/W), $T_{amb} \leq 70\text{ }^{\circ}\text{C}$ (270 K/W)	$P_{tot}$	180	mW
Junction temperature		$T_j$	125	$^{\circ}\text{C}$
Operating temperature range		$T_{amb}$	- 40 to + 100	$^{\circ}\text{C}$
Storage temperature range		$T_{stg}$	- 40 to + 100	$^{\circ}\text{C}$
Thermal resistance junction/ambient	mounted on PC board FR4 optional paddesign (see page 7)	$R_{thJA}$	290	K/W
	mounted on PC board FR4 recommended paddesign (see page 6)	$R_{thJA}$	270	K/W

## Optical and Electrical Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

### Red

**TLMK321.**

Parameter	Test condition	Part	Symbol	Min	Typ.	Max	Unit
Luminous intensity	$I_F = 50\text{ mA}$	TLMK3210	$I_V$	1000	1250		mcd
Luminous flux/Luminous intensity			$\phi_V/I_V$		3		mlm/mcd
Dominant wavelength	$I_F = 50\text{ mA}$		$\lambda_d$	611	617	622	nm
Peak wavelength	$I_F = 50\text{ mA}$		$\lambda_p$		624		nm
Spectral bandwidth at 50 % $I_{rel\text{ max}}$	$I_F = 50\text{ mA}$		$\Delta\lambda$		18		nm
Angle of half intensity	$I_F = 50\text{ mA}$		$\phi$		$\pm 60$		deg
Forward voltage	$I_F = 50\text{ mA}$		$V_F$	1.85	2.2	3.0	V
Reverse current	$V_R = 5\text{ V}$		$V_R$		0.01	10	$\mu\text{A}$

## Typical Characteristics ( $T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)

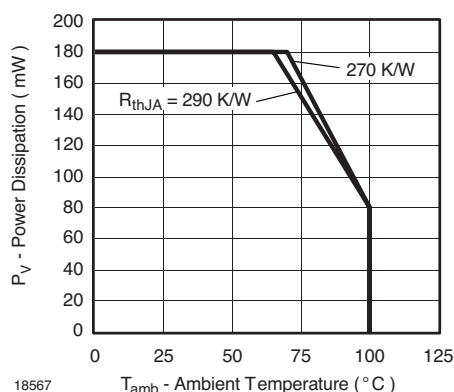


Figure 1. Power Dissipation vs. Ambient Temperature

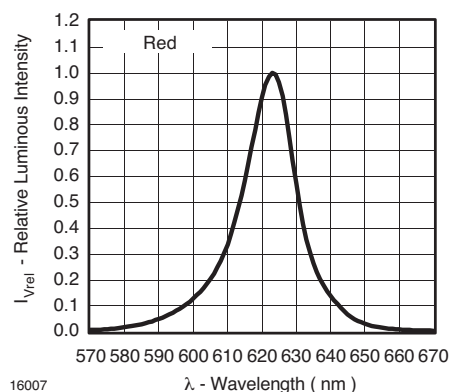


Figure 4. Relative Intensity vs. Wavelength

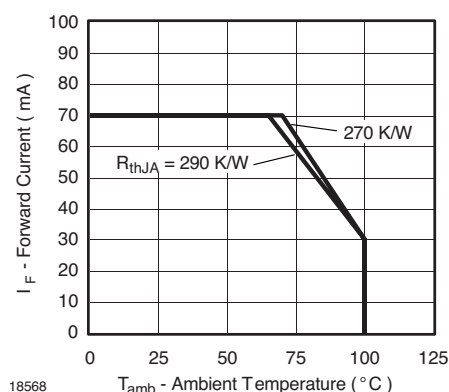


Figure 2. Forward Current vs. Ambient Temperature

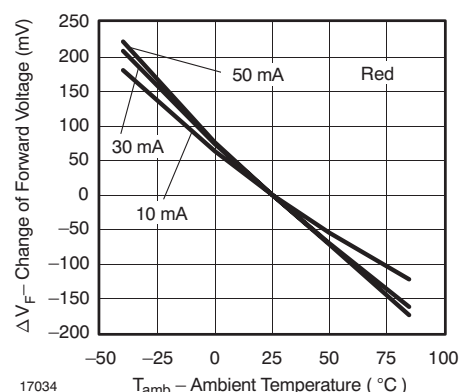


Figure 5. Change of Forward Voltage vs. Ambient Temperature

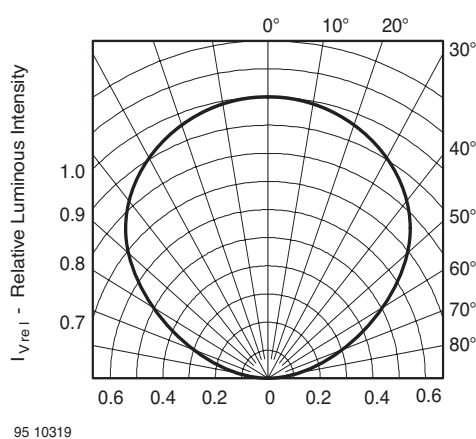


Figure 3. Rel. Luminous Intensity vs. Angular Displacement

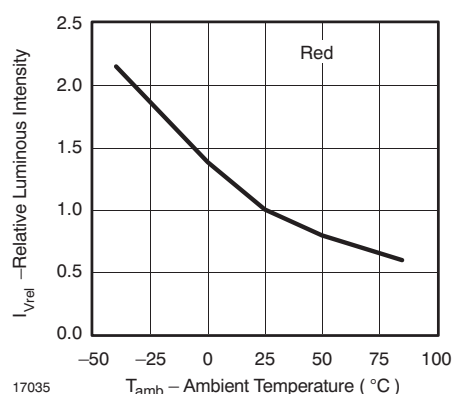


Figure 6. Relative Luminous Intensity vs. Amb. Temperature

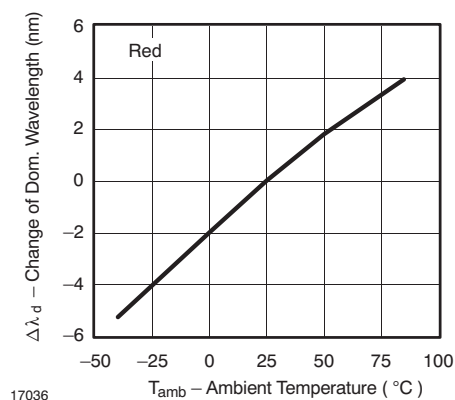


Figure 7. Change of Dominant Wavelength vs. Ambient Temperature

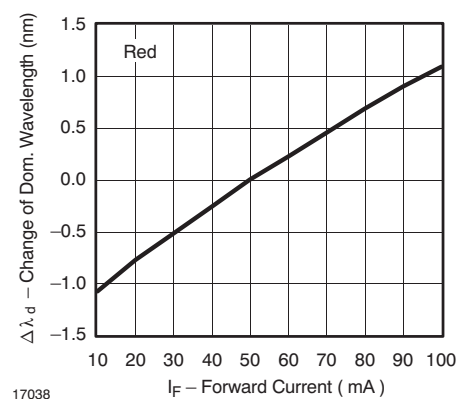


Figure 9. Change of Dominant Wavelength vs. Forward Current

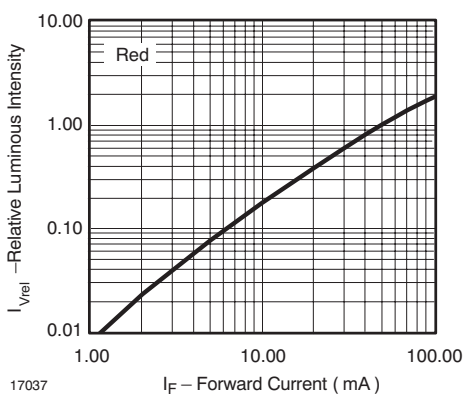


Figure 8. Relative Luminous Intensity vs. Forward Current

## Forward Voltage Classification

Group	Forward Voltage (V)	
	min	max
1	1.85	2.25
2	2.15	2.55
3	2.43	2.67
4	2.55	2.79
5	2.67	2.91
6	2.79	3.03

**Color Classification**

Group	Dominant Wavelength (nm)					
	Red		Soft Orange		Yellow	
	min	max	min	max	min	max
1	611	618	598	601	581	584
2	614	622	600	603	583	586
3			602	605	585	588
4			604	607	587	590
5			606	609	589	592
6			608	611	591	594

**Luminous Intensity Classification**

Group	Luminous Intensity (mcd)	
	min	max
1a	1000	1600
1b	1250	2000
2a	1600	2500
2b	2000	3200

**Group Name on Label**

Luminous Intensity Group	Halfgroup	Wavelength	Forward Voltage
1	b	2	1


One packing unit/tape contains only one classification group of luminous intensity, color and forward voltage

Only one single classification groups is not available

The given groups are not order codes, customer specific group combinations require marketing agreement

No color subgrouping for Super Red


## Taping

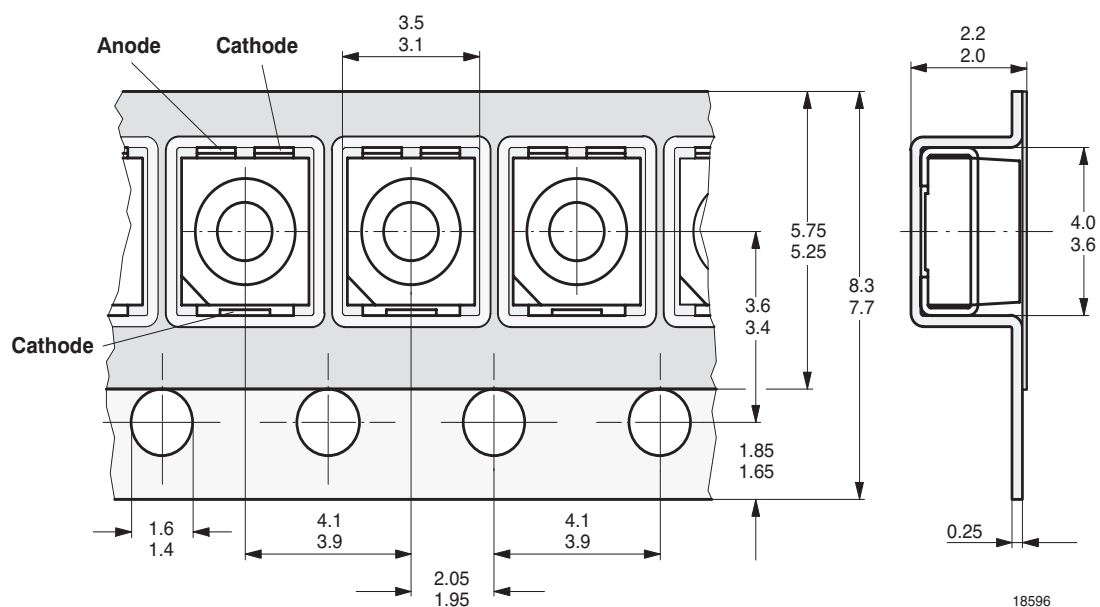


Tape Dimensions in mm for PLCC-3


## Recommended Pad Design

(Wave-Soldering),  $R_{thJA} = 270 \text{ K/W}$




Pad design for improved head dissipation

 solder resist

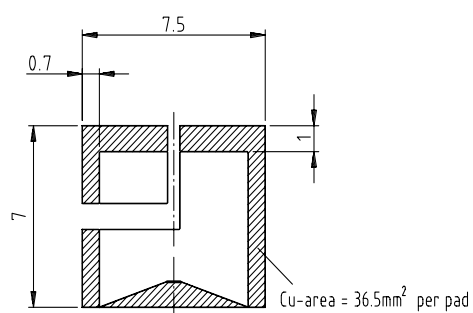


Component location on pad



16260


## Recommended Pad Design

(Reflow-Soldering),  $R_{thJA} = 270 \text{ K/W}$




Pad design for improved head dissipation

 solder resist

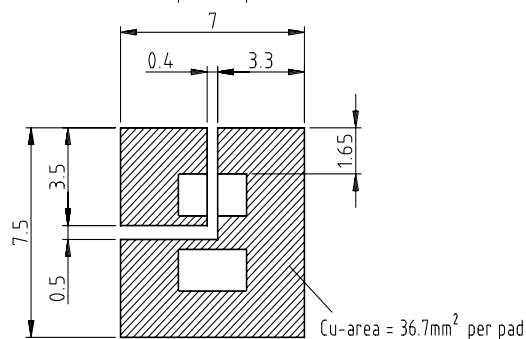


Component location on pad




16261

## Optional Pad Design


**(Wave-Soldering),  $R_{thJA} = 290 \text{ K/W}$**



Optional padding

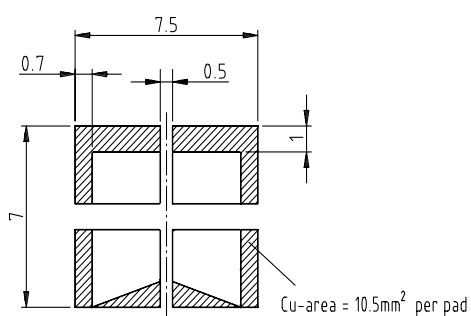


Component location on pad




16262

## Optional Pad Design


**(Reflow-Soldering),  $R_{thJA} = 290 \text{ K/W}$**



Optional padding

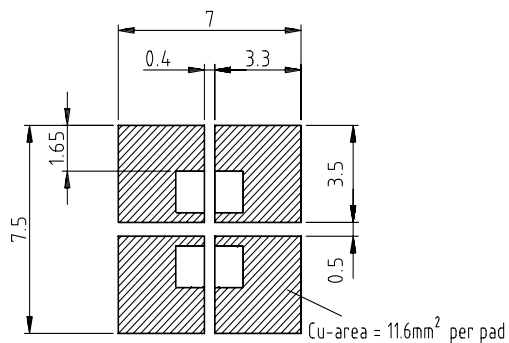




Component location on pad



16263




## Package Dimensions in mm

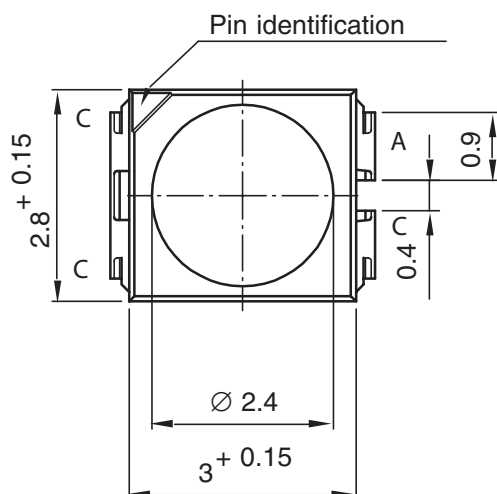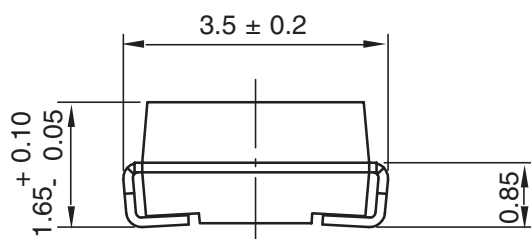

Drawing-No. : 6.541-5054.01-4  
Issue: 1; 19.02.04

## Mounting Pad Layout

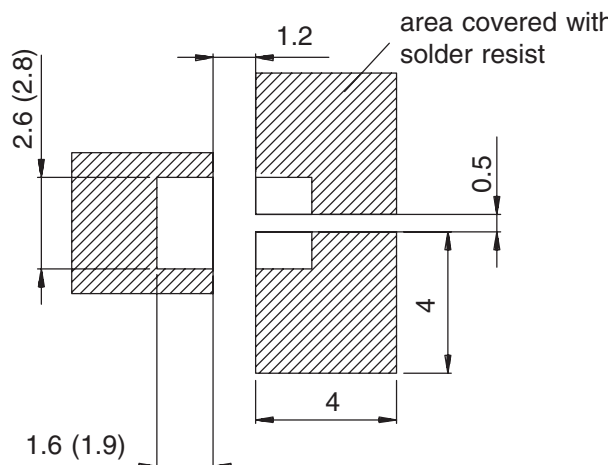

Dimensions: IR and Vaporphase  
(Wave Soldering)

16276



### Ozone Depleting Substances Policy Statement

It is the policy of Vishay Semiconductor GmbH to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design  
and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay Semiconductors products for any unintended or unauthorized application, the buyer shall indemnify Vishay Semiconductors against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.