

# AM4TW Series



## 4 watt dc-dc converters

- 24-PIN DIP PACKAGE
- LOW PROFILE METAL PACKAGE
- HIGH EFFICIENCY UP TO 80%
- WIDE 4:1 INPUT RANGE
- INPUT/OUTPUT ISOLATION: 1500 & 3500VDC
- OPERATING TEMPERATURE: -40°C ... +85°C
- PIN-COMPATIBLE WITH MULTIPLE MANUFACTURERS
- CONTINUOUS SHORT CIRCUIT PROTECTION

## GENERAL DESCRIPTION

Our AM4TW series is a family of cost effective 4W single and dual output DC-DC converters. These converters combine a nickel-coated copper package in a 24-pin DIP compatible case with high performance features such as 1500 & 3500VDC input/output isolation voltage, continuous short circuit protection with automatic restart and tight line / load regulation. Wide range devices operate over 4:1 input voltage range providing stable output voltage. Devices are encapsulated using flame retardant resin. Input

voltages of 24 & 48VDC with output voltages of 3.3, 5, 7.2, 9, 12, 15, 18, 24,  $\pm 3.3$ ,  $\pm 5$ ,  $\pm 7.2$ ,  $\pm 9$ ,  $\pm 12$ ,  $\pm 15$ ,  $\pm 18$  &  $\pm 24$ VDC. High performance features include high efficiency operation up to 80% and output voltage accuracy of  $\pm 1\%$  maximum. All models are packaged in a low profile 31.75x20.32x10.16mm 24 pin DIP nickel-coated copper case. Operation is specified over the full operating temperature range of -40°C to +85°C with no derating required. Cooling is by free-air convection.

## ELECTRICAL SPECIFICATIONS

Specifications typical at +25°C, nominal input voltage, rated output current unless otherwise specified

### Input Specifications:

Voltage range	24 VDC, 9~36 VDC 48 VDC, 18~72 VDC
Filter	$\pi$ (Pi) Network

### Isolation Specifications:

Rated voltage	1500 & 3500 VDC
Resistance	> 1000 MOhm
Capacitance	80pF, typ.

### General Specifications:

Efficiency	75% to 80%
Switching Frequency	250 KHz, typ. 100% load

### Physical Specifications:

Dimensions	31.75x20.32x10.16 mm 1.25x0.8x0.4 inches
Weight	26 g
Case material	Nickel-Coated Copper

### Output Specifications:

Voltage accuracy	$\pm 1\%$ , max.
Voltage balance (Dual Output)	$\pm 1\%$
Ripple & noise (at 20MHz BW)	60mVp-p, max.
Short circuit protection	Continuous
Short circuit restart	Automatic
Line voltage regulation	$\pm 0.5\%$ , max.
Load voltage regulation	$\pm 0.5\%$ , max.
Temperature Coefficient	$\pm 0.02\%/^{\circ}\text{C}$ , typ.


### Environmental Specifications:

Operating temperature (ambient)	-40°C to +85°C
Storage temperature	-55°C to +125°C
Case temperature	+100°C, max.
Derating	None required
Humidity (non-condensing)	Up to 90%
Cooling	Free-air Convection

MTBF: >1,211,000 hrs (MIL-HDBK-217F, Ground Benign,  $t=+25^{\circ}\text{C}$ )

Specifications are subject to change without notification

## OUTLINE DIMENSIONS & PIN CONNECTIONS

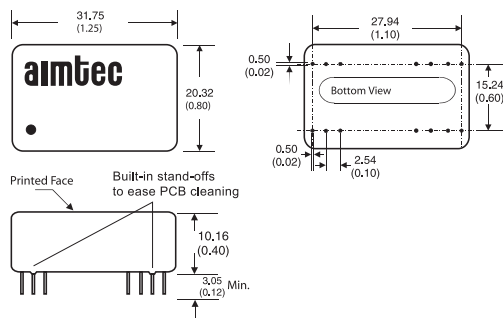

Pin	1500VDC		3500VDC	
	Single	Dual	Single	Dual
1	+V Input	+V Input	Omitted	Omitted
2	N.C.	-V Output	-V Input	-V Input
3	N.C.	Common	-V Input	-V Input
9	Omitted	Omitted	N.C.	Common
10	-V Output	Common	Omitted	Omitted
11	+V Output	+V Output	N.C.	-V Output
12/13	-V Input	-V Input	Omitted	Omitted
14	+V Output	+V Output	+V Output	+V Output
15	-V Output	Common	Omitted	Omitted
16	Omitted	Omitted	-V Output	Common
22	N.C.	Common	+V Input	+V Input
23	N.C.	-V Output	+V Input	+V Input
24	+V Input	+V Input	Omitted	Omitted

# AM4TW Series

## MODELS Single output

Models		Input Voltage	Ouput Voltage	Ouput Current max.
Isolation 1500VDC	Isolation 3500VDC			
AM4TW-2403S	AM4TW-2403SH35	9VDC - 36VDC	3.3VDC	1000mA
AM4TW-2405S	AM4TW-2405SH35		5VDC	800mA
AM4TW-2407S	AM4TW-2407SH35		7.2VDC	556mA
AM4TW-2409S	AM4TW-2409SH35		9VDC	444mA
AM4TW-2412S	AM4TW-2412SH35		12VDC	333mA
AM4TW-2415S	AM4TW-2415SH35		15VDC	267mA
AM4TW-2418S	AM4TW-2418SH35		18VDC	222mA
AM4TW-2424S	AM4TW-2424SH35		24VDC	167mA
AM4TW-4803S	AM4TW-4803SH35	18VDC - 72VDC	3.3VDC	1000mA
AM4TW-4805S	AM4TW-4805SH35		5VDC	800mA
AM4TW-4807S	AM4TW-4807SH35		7.2VDC	556mA
AM4TW-4809S	AM4TW-4809SH35		9VDC	444mA
AM4TW-4812S	AM4TW-4812SH35		12VDC	333mA
AM4TW-4815S	AM4TW-4815SH35		15VDC	267mA
AM4TW-4818S	AM4TW-4818SH35		18VDC	222mA
AM4TW-4824S	AM4TW-4824SH35		24VDC	167mA

## Dual output

Models		Input Voltage	Ouput Voltage	Ouput Current max.
Isolation 1500VDC	Isolation 3500VDC			
AM4TW-2403D	AM4TW-2403DH35	9VDC - 36VDC	±3.3VDC	±500mA
AM4TW-2405D	AM4TW-2405DH35		±5VDC	±400mA
AM4TW-2407D	AM4TW-2407DH35		±7.2VDC	±278mA
AM4TW-2409D	AM4TW-2409DH35		±9VDC	±222mA
AM4TW-2412D	AM4TW-2412DH35		±12VDC	±167mA
AM4TW-2415D	AM4TW-2415DH35		±15VDC	±125mA
AM4TW-2418D	AM4TW-2418DH35		±18VDC	±100mA
AM4TW-2424D	AM4TW-2424DH35		±24VDC	±84mA
AM4TW-4803D	AM4TW-4803DH35	18VDC - 72VDC	±3.3VDC	±500mA
AM4TW-4805D	AM4TW-4805DH35		±5VDC	±400mA
AM4TW-4807D	AM4TW-4807DH35		±7.2VDC	±278mA
AM4TW-4809D	AM4TW-4809DH35		±9VDC	±222mA
AM4TW-4812D	AM4TW-4812DH35		±12VDC	±167mA
AM4TW-4815D	AM4TW-4815DH35		±15VDC	±125mA
AM4TW-4818D	AM4TW-4818DH35		±18VDC	±100mA
AM4TW-4824D	AM4TW-4824DH35		±24VDC	±84mA