

RECTIFIERS

Fast Recovery, 0.5 Amp to 2 Amp

UTR10-UTR60
 UTR01-UTR61
 UTR02-UTR62

FEATURES

- Continuous Rating: to 2A
- Controlled Avalanche
- Surge Rating: to 25A
- Fast Recovery 40kHz Operation
- PIV: to 600V
- Miniature Package

DESCRIPTION


These miniature fast recovery rectifiers permit operation at full frequencies as high as 40kHz square wave. They have the unique Microsemi Fused in Glass construction.

ABSOLUTE MAXIMUM RATINGS

Peak Inverse Voltage	½ Amp Series	1 Amp Series	2 Amp Series
50V		UTR01	UTR02
100V	UTR10	UTR11	UTR12
200V	UTR20	UTR21	UTR22
300V	UTR30	UTR31	UTR32
400V	UTR40	UTR41	UTR42
500V	UTR50	UTR51	UTR52
600V	UTR60	UTR61	UTR62

	½ AMP SERIES	1 AMP SERIES	2 AMP SERIES
Maximum Average D.C. Output Current			
@ $T_A = 25^\circ\text{C}$	0.5A	1.0A	2.0A
@ $T_A = 100^\circ\text{C}$	0.25A	0.5A	1.0A
Non-Repetitive Sinusoidal			
Surge Current (8.3ms)	15A	20A	25A
Operating Temperature Range	-195°C to +175°C		
Storage Temperature Range	-195°C to +200°C		
Thermal Resistance	See lead temperature derating curves		

MECHANICAL SPECIFICATIONS

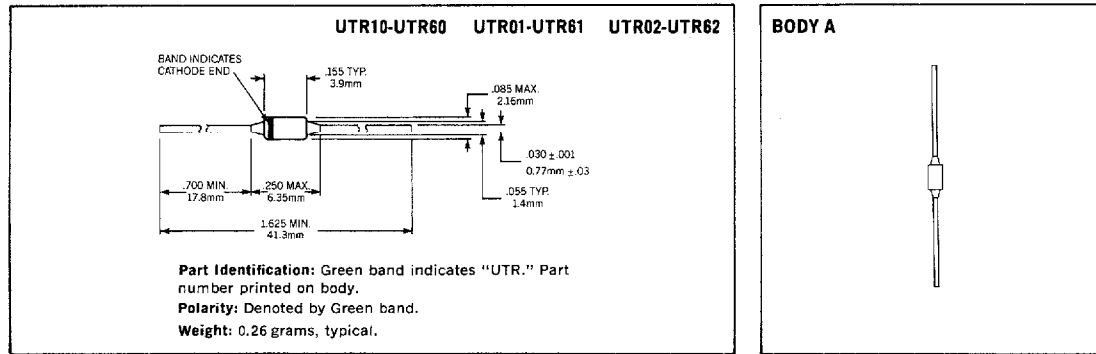


THESE DEVICES ALSO AVAILABLE IN SURFACE MOUNT PACKAGE. SEE SECTION 10


ELECTRICAL SPECIFICATIONS (at 25°C unless noted)

Type	PIV	Maximum Forward Voltage Drop	Maximum Leakage Current @ PIV		Maximum Reverse Recovery Time*	Maximum Junction Capacitance @ 25°C	
			25°C	100°C		0V	-10V
UTR02	50V	1.1V @ 1000mA	3μA	100μA	250ns	150pf	60pf
UTR12	100V				250ns	100pf	40pf
UTR22	200V				250ns	80pf	32pf
UTR32	300V				300ns	70pf	28pf
UTR42	400V				350ns	60pf	24pf
UTR52	500V				400ns	50pf	20pf
UTR62	600V	400ns	40pf	16pf			
UTR01	50V	1.1V @ 500mA	3μA	100μA	250ns	150pf	60pf
UTR11	100V				250ns	100pf	40pf
UTR21	200V				250ns	80pf	32pf
UTR31	300V				300ns	70pf	28pf
UTR41	400V				350ns	60pf	24pf
UTR51	500V				400ns	50pf	20pf
UTR61	600V	400ns	40pf	16pf			
UTR10	100V	1.1V @ 200mA	3μA	100μA	250ns	100pf	40pf
UTR20	200V				250ns	80pf	32pf
UTR30	300V				300ns	70pf	28pf
UTR40	400V				350ns	60pf	24pf
UTR50	500V				400ns	50pf	20pf
UTR60	600V				400ns	40pf	16pf


*Recovery time is measured from 10.0mA to 10.0mA recovery to 5.0mA

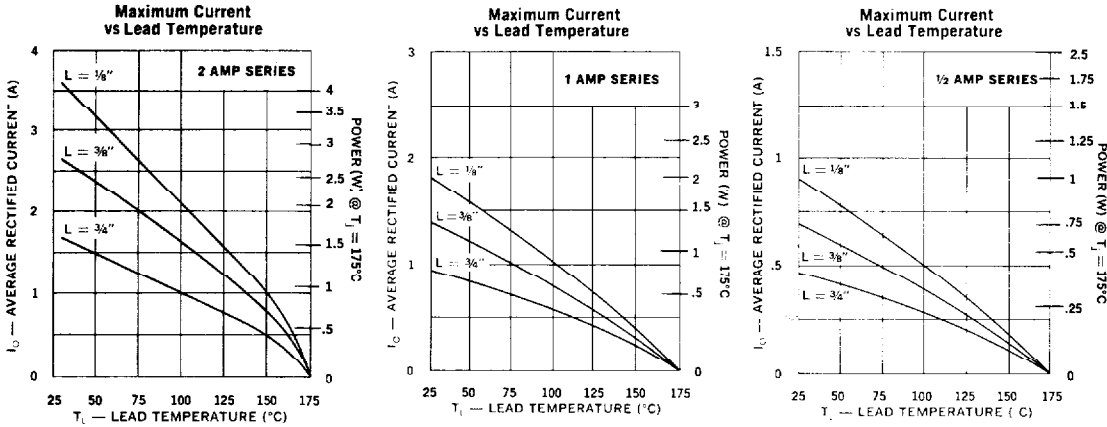


Reverse-Recovery Circuit

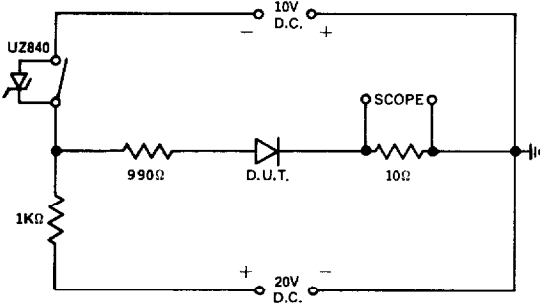


Allowable Forward Surge vs Number of Cycles

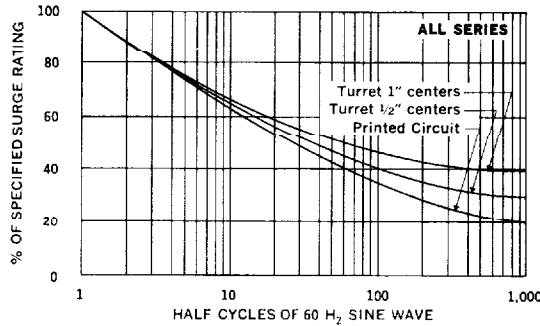


Typical Forward Current vs Forward Voltage

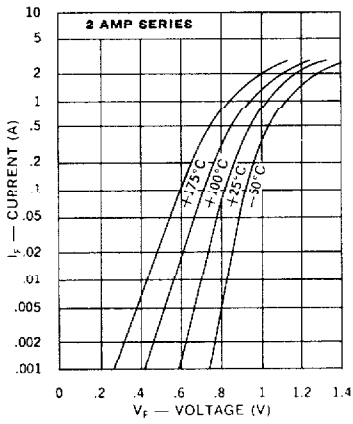


Typical Forward Current vs Forward Voltage

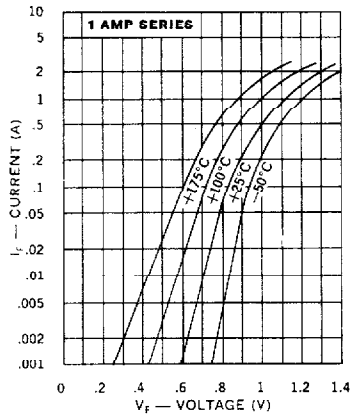


Typical Forward Current vs Forward Voltage

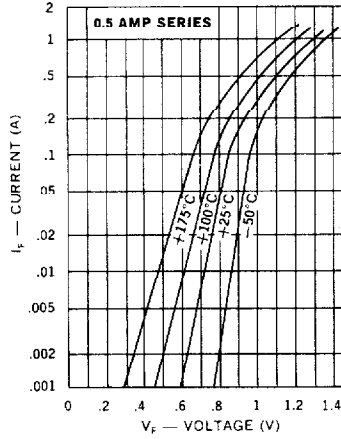


Typical Reverse Current vs PIV

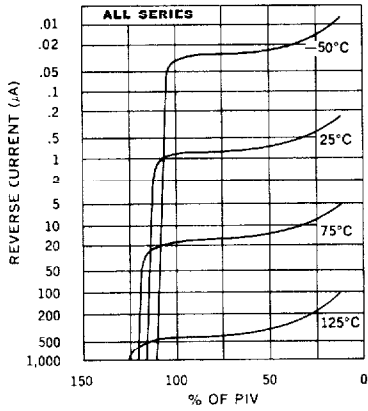

Efficiency vs Frequency at Rated Current (Sine Wave)

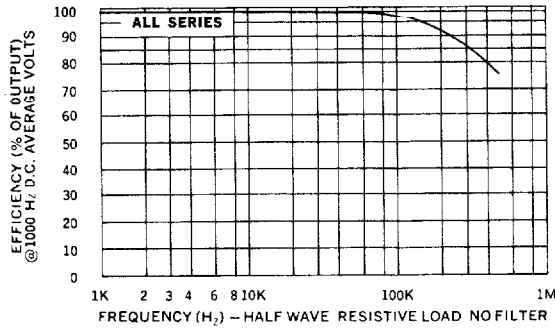

Forward Pulse Current vs Pulse Duration

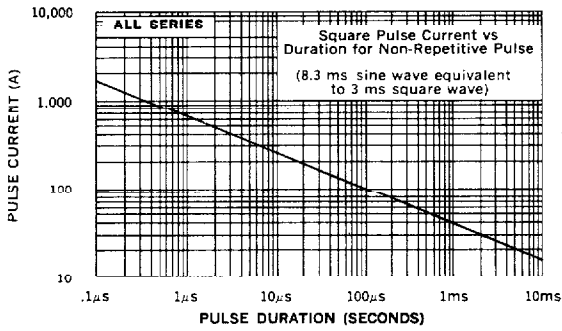

Reverse Pulse Power vs Pulse Duration

