

Surface Mount Switch

50Ω SPDT, Absorptive DC to 4.6 GHz

KSWA-2-46+ KSWA-2-46





Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 150°C
Input Power	see Note 1
Control V	see Note 2

Pin Connections

RF IN	2
RF OUT 1	5
RF OUT 2	8
CONTROL 1	3
CONTROL 2	1
GROUND	4,6,7


Outline Drawing

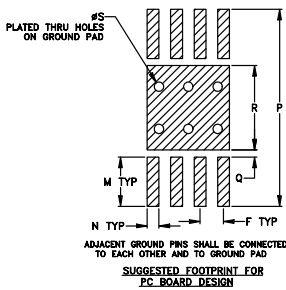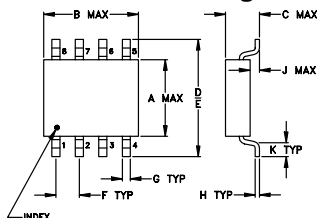

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	M	N	P	Q	R	S	wt.
.180	.180	.070	.400	.350	.050	.015	.005	.005	.070	.105	.025	.420	.015	.180	.020	grams
4.57	4.57	1.78	10.16	8.89	1.27	0.38	0.13	0.13	1.78	2.67	0.64	10.67	0.38	4.57	0.51	0.15

Demo Board MCL P/N: TB-204 Suggested PCB Layout (PL-217)

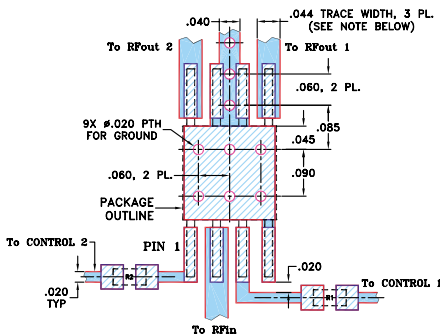

RESISTORS R1, R2: 100 Ohm, 0603 SIZE.

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, DC to 4.6 GHz
- low insertion loss, 1.3 dB typ.
- hermetically sealed

Applications

- PCN
- cellular
- 2-way radio
- receiver antenna switching

CASE STYLE: XX112
PRICE: \$58.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +suffix identifies RoHS Compliance. See our web site for RoHS compliance methodologies and qualifications.

Electrical Specifications

FREQ. (GHz)	INSERTION LOSS (dB)				1dB COMPR. (dBm)			IN-OUT ISOLATION (dB)									
	DC-200 MHz	200-1000 MHz	1000-3000 MHz	3000-4600 MHz	DC-200 MHz	200-1000 MHz	1000-4600 MHz	DC-200 MHz	200-1000 MHz	1000-4600 MHz	1000-4600 MHz	1000-4600 MHz	1000-4600 MHz				
f _L	Typ.	Max.	Typ.	Max.	Typ.	Typ.	Typ.	Typ.	Min.	Typ.	Min.	Typ.	Min.				
DC	0.8	1.1	0.9	1.3	1.5	2.6	1.5	2.6	10	17	27	60	45	50	40	30	25

Additional Specifications


Control Voltage	-8/0 for compression spec, -8 to -5/0 for all other specs
Control Current, mA	2.5 typ. at -8V
VSWR(:1)	1.3 typ.
Rise/Fall time (10%-90%), ns	2 typ.
Switching time, 50% of Control to 90% RF (Turn-on), ns	4 typ.
10% RF (Turn-off), ns	2.5 typ.
Video Leakage, mVp-p 0/-5V Control	30 typ.
MTBF, hrs @ 100°C case	11X10 ⁶

1. Max. Input RF power, +27 dBm except below 500 MHz +24 dBm
2. Control voltage (-10V) maximum.
3. Video leakage or break through is defined as leakage of switching signal to RF output ports.
4. All RF pins must be DC blocked or held at 0V DC.

CONTROL LOGIC

CONTROL LOGIC			
Control Ports		RF outputs	
1	2	1	2
-V	0	On	Off
0	-V	Off	On

Electrical Schematic

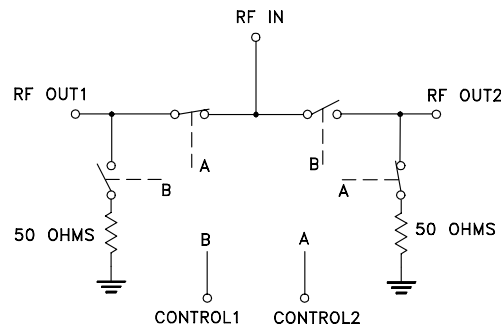

Typical Performance Data

FREQ. (MHz)	ON INSERTION LOSS (dB) Control @ 0V/-5V IN-OUT		OFF ISOLATION (dB) Control @ 0V/-5V IN-OUT		IN	VSWR	
	—	σ	—	σ		ON	OUT
	x		x			x	x
3.00	0.55	0.01	82.53	2.67	1.12	1.12	1.02
5.00	0.55	0.02	85.42	4.39	1.12	1.12	1.02
10.00	0.55	0.02	84.71	7.84	1.13	1.13	1.02
20.00	0.63	0.04	74.57	2.52	1.13	1.12	1.02
50.00	0.62	0.02	64.87	0.76	1.12	1.12	1.02
100.00	0.67	0.02	58.56	0.45	1.12	1.12	1.02
200.00	0.72	0.02	54.29	0.36	1.12	1.11	1.02
500.00	0.80	0.02	51.52	0.42	1.13	1.12	1.02
911.55	0.90	0.02	48.87	1.18	1.16	1.11	1.04
1000.00	0.90	0.03	48.56	1.23	1.17	1.10	1.05
1581.00	1.01	0.04	44.26	1.63	1.20	1.04	1.11
2107.00	1.10	0.03	39.70	1.28	1.30	1.09	1.14
2370.00	1.15	0.05	37.89	1.12	1.31	1.11	1.15
2489.55	1.26	0.06	37.25	0.97	1.32	1.14	1.17
2752.55	1.32	0.07	35.59	0.62	1.41	1.22	1.23
3278.55	1.26	0.04	31.74	1.06	1.44	1.35	1.29
3804.55	1.63	0.09	28.75	0.72	1.39	1.41	1.38
4330.55	1.52	0.06	25.75	0.41	1.49	1.78	1.65
4474.00	1.47	0.09	25.51	0.36	1.57	1.94	1.73
4600.00	1.98	0.06	25.42	0.32	1.55	1.87	1.67

