

SHINDENGEN

General Purpose Rectifiers

SIL Bridges

D4SB80

800V 4A


FEATURES

- Thin Single In-Line Package
- High IFSM
- Applicable to Automatic Insertion

APPLICATION

- Switching power supply
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

OUTLINE DIMENSIONS

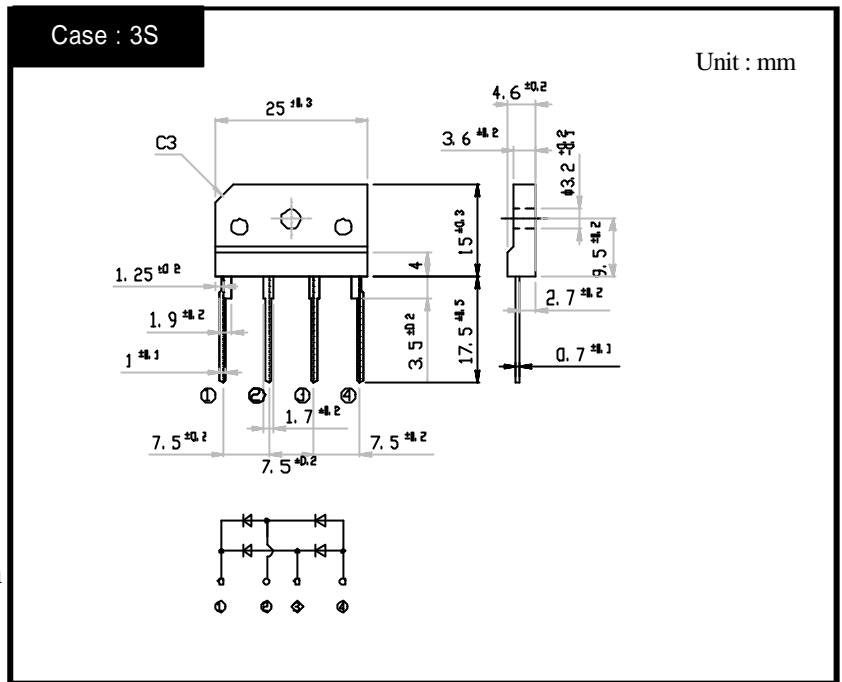

RATINGS

Absolute Maximum Ratings (If not specified $T_c=25$)


| Item | Symbol | Conditions | Ratings | Unit |
|-----------------------------------|-----------|--|-----------|--------|
| Storage Temperature | T_{stg} | | -40 ~ 150 | |
| Operating Junction Temperature | T_j | | 150 | |
| Maximum Reverse Voltage | V_{RM} | | 800 | V |
| Average Rectified Forward Current | I_O | 50Hz sine wave, R-load With heatsink $T_c=108$ | 4 | A |
| | | 50Hz sine wave, R-load Without heatsink $T_a=25$ | 2.3 | |
| Peak Surge Forward Current | I_{FSM} | 50Hz sine wave, Non-repetitive 1cycle peak value, $T_j=25$ | 150 | A |
| Current Squared Time | I^2t | 1ms $t < 10ms$ $T_j=25$ | 110 | A^2s |
| Dielectric Strength | V_{dis} | Terminals to case, AC 1 minute | 2 | kV |
| Mounting Torque | TOR | (Recommended torque : 0.5N·m) | 0.8 | N·m |

Electrical Characteristics (If not specified $T_c=25$)

| Item | Symbol | Conditions | Ratings | Unit |
|--------------------|---------------|---|----------|---------|
| Forward Voltage | V_F | $I_F=2A$, Pulse measurement, Rating of per diode | Max.0.95 | V |
| Reverse Current | I_R | $V_R=V_{RM}$, Pulse measurement, Rating of per diode | Max.10 | μA |
| Thermal Resistance | θ_{jc} | junction to case With heatsink | Max.5.5 | /W |
| | θ_{jl} | junction to lead Without heatsink | Max.6 | |
| | θ_{ja} | junction to ambient Without heatsink | Max.30 | |


D4SB80

Forward Voltage

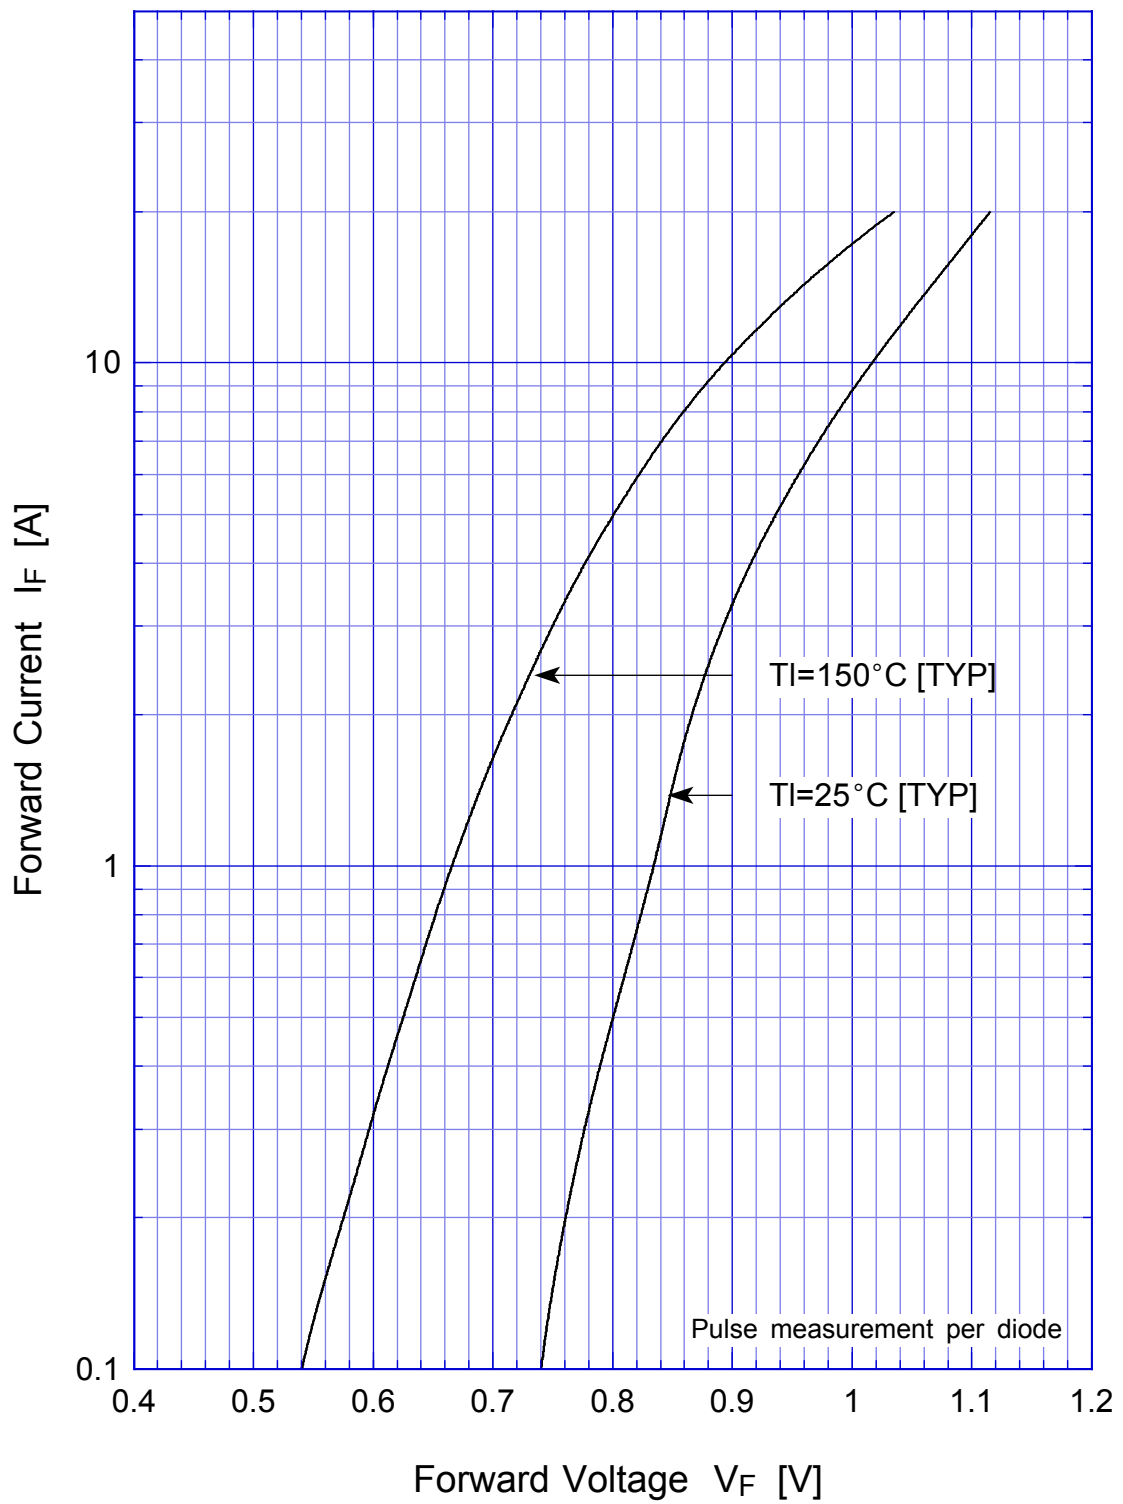

D4SB80


Forward Power Dissipation

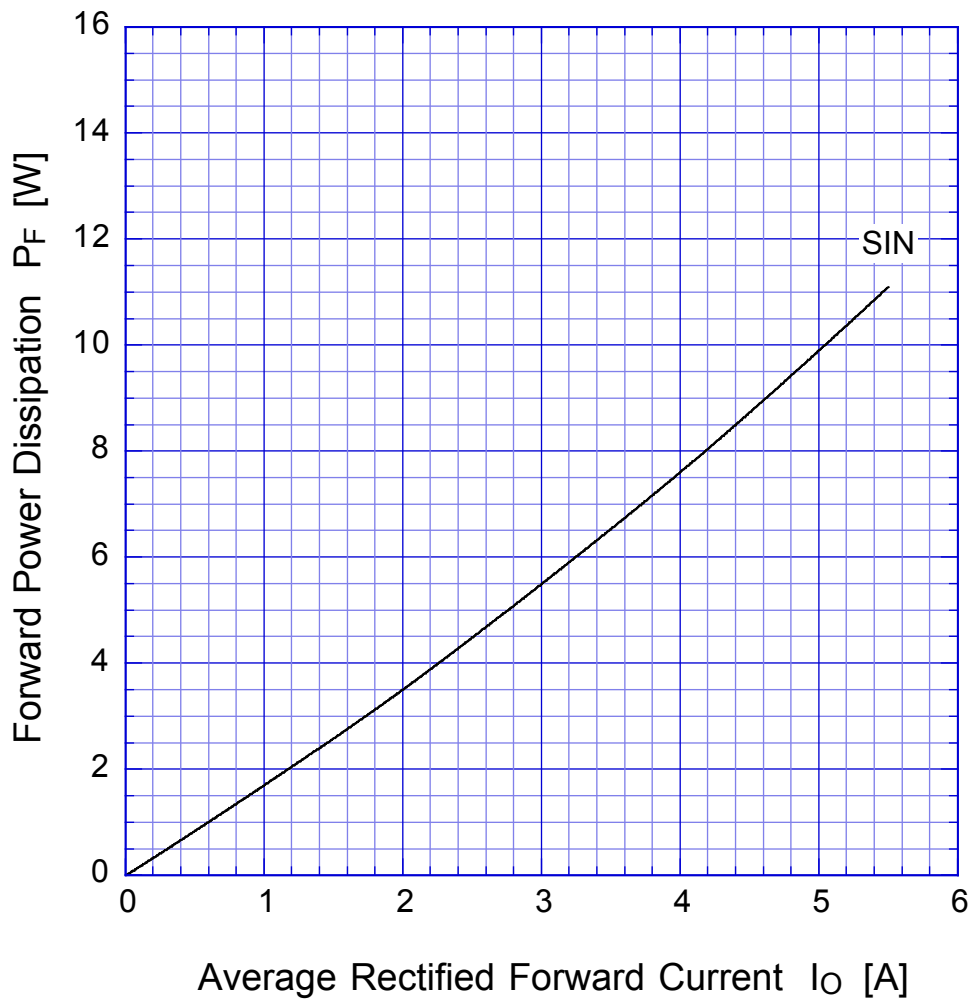

$T_j = 150^\circ\text{C}$
Sine wave

D4SB80


Derating Curve

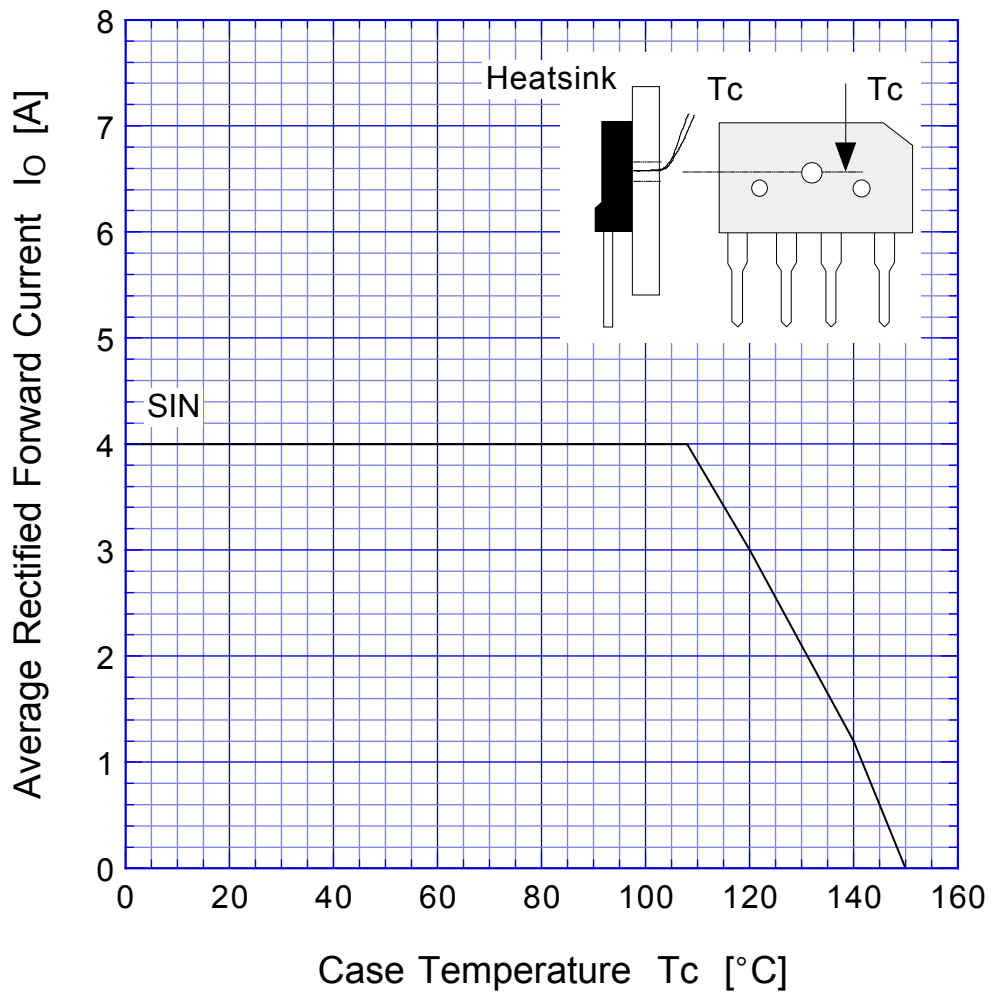

Sine wave
R-load
with heatsink

D4SB80

Derating Curve

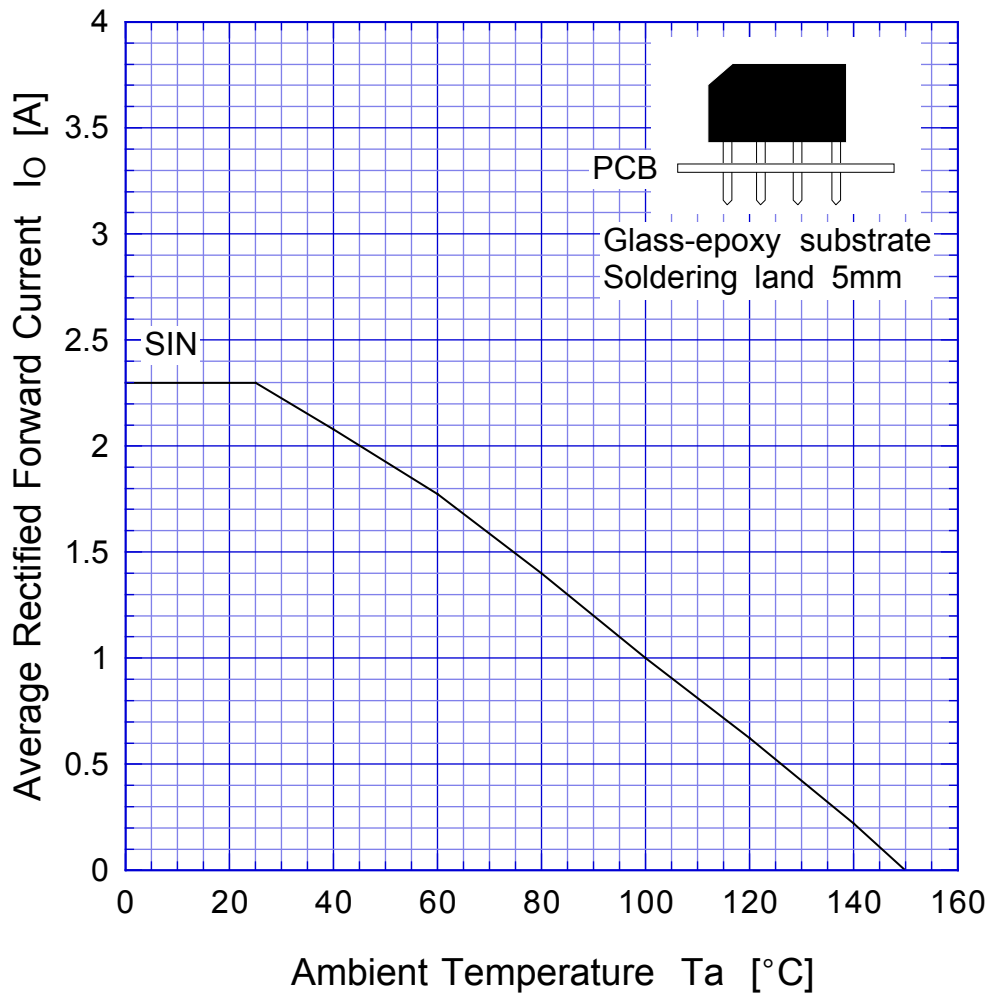

Sine wave
R-load
Free in air

D4SB80

Peak Surge Forward Capability

