

## TOSHIBA MOS DIGITAL INTEGRATED CIRCUIT SILICON GATE CMOS

262,144-WORD BY 8-BIT STATIC RAM

### DESCRIPTION

The TC55V2001FI/FTI/TRI/STI/SRI is a 2,097,152-bit static random access memory (SRAM) organized as 262,144 words by 8 bits. Fabricated using Toshiba's CMOS Silicon gate process technology, this device operates from a single 2.7 to 3.6 V power supply. Advanced circuit technology provides both high speed and low power at an operating current of 3 mA/MHz and a minimum cycle time of 85 ns. It is automatically placed in low-power mode at 1  $\mu$ A standby current (L-Version at  $V_{DD}=3V$ ,  $T_a=25^\circ C$ ) when chip enable ( $\overline{CE1}$ ) is asserted high or ( $\overline{CE2}$ ) is asserted low. There are three control inputs.  $\overline{CE1}$  and  $\overline{CE2}$  are used to select the device and for data retention control, and output enable ( $\overline{OE}$ ) provides fast memory access. This device is well suited to various microprocessor system applications where high speed, low power and battery backup are required. The TC55V2001FI/FTI/TRI/STI/SRI is available in a plastic 32-pin small-outline package (SOP) and normal and reverse pinout plastic 32-pin thin-small-outline package (TSOP).

### FEATURES

- Low-power dissipation  
Operating: 10.8 mW/MHz (typical)
- Single power supply voltage of 2.7 to 3.6 V
- Power down features using  $\overline{CE1}$  and  $\overline{CE2}$ .
- Data retention supply voltage of 2 to 3.6 V
- Direct TTL compatibility for all inputs and outputs
- Standby current ( $T_a=25^\circ C$  maximum)

|      | TC55V2001FI/FTI/TRI/STI/SRI |             |
|------|-----------------------------|-------------|
|      | -85, -10                    | -85L, -10L  |
| 3.6V | 3 $\mu$ A                   | 1.4 $\mu$ A |
| 3.0V | 2 $\mu$ A                   | 1 $\mu$ A   |

- Access Times (maximum):

|                              | TC55V2001FI/FTI/TRI/STI/SRI |           |
|------------------------------|-----------------------------|-----------|
|                              | -85, -85L                   | -10, -10L |
| Access Time                  | 85ns                        | 100ns     |
| $\overline{CE1}$ Access Time | 85ns                        | 100ns     |
| $\overline{CE2}$ Access Time | 85ns                        | 100ns     |
| $\overline{OE}$ Access Time  | 45ns                        | 50ns      |

- Packages:

|                              |                      |
|------------------------------|----------------------|
| SOP32-P-525-1.27 (FI)        | (Weight: 1.06 g typ) |
| TSOP I 32-P-0820-0.50 (FTI)  | (Weight: 0.34 g typ) |
| TSOP I 32-P-0820-0.50A (TRI) | (Weight: 0.34 g typ) |
| TSOP I 32-P-0.50 (STI)       | (Weight: 0.24 g typ) |
| TSOP I 32-P-0.50A (SRI)      | (Weight: 0.24 g typ) |

### PIN ASSIGNMENT (TOP VIEW)

○ 32 PIN SOP


|      |    |    |                  |
|------|----|----|------------------|
| A17  | 1  | 32 | $V_{DD}$         |
| A16  | 2  | 31 | A15              |
| A14  | 3  | 30 | CE2              |
| A12  | 4  | 29 | R/W              |
| A7   | 5  | 28 | A13              |
| A6   | 6  | 27 | A8               |
| A5   | 7  | 26 | A9               |
| A4   | 8  | 25 | A11              |
| A3   | 9  | 24 | $\overline{OE}$  |
| A2   | 10 | 23 | A10              |
| A1   | 11 | 22 | $\overline{CE1}$ |
| A0   | 12 | 21 | I/O8             |
| I/O1 | 13 | 20 | I/O7             |
| I/O2 | 14 | 19 | I/O6             |
| I/O3 | 15 | 18 | I/O5             |
| GND  | 16 | 17 | I/O4             |

○ 32 PIN TSOP

(Normal pinout)



(Reverse pinout)



### PIN NAMES


|                                  |                            |
|----------------------------------|----------------------------|
| A0 to A17                        | Address Inputs             |
| R/W                              | Read / Write Control Input |
| $\overline{OE}$                  | Output Enable Input        |
| $\overline{CE1}, \overline{CE2}$ | Chip Enable Input          |
| I/O1 to I/O8                     | Data Input / Output        |
| $V_{DD}$                         | Power                      |
| GND                              | Ground                     |

|          |                 |                |                |                 |      |      |                 |          |                 |                 |                 |                 |                |                  |                 |                 |
|----------|-----------------|----------------|----------------|-----------------|------|------|-----------------|----------|-----------------|-----------------|-----------------|-----------------|----------------|------------------|-----------------|-----------------|
| PIN NO.  | 1               | 2              | 3              | 4               | 5    | 6    | 7               | 8        | 9               | 10              | 11              | 12              | 13             | 14               | 15              | 16              |
| PIN NAME | A <sub>11</sub> | A <sub>9</sub> | A <sub>8</sub> | A <sub>13</sub> | R/W  | CE2  | A <sub>15</sub> | $V_{DD}$ | A <sub>17</sub> | A <sub>16</sub> | A <sub>14</sub> | A <sub>12</sub> | A <sub>7</sub> | A <sub>6</sub>   | A <sub>5</sub>  | A <sub>4</sub>  |
| PIN NO.  | 17              | 18             | 19             | 20              | 21   | 22   | 23              | 24       | 25              | 26              | 27              | 28              | 29             | 30               | 31              | 32              |
| PIN NAME | A <sub>3</sub>  | A <sub>2</sub> | A <sub>1</sub> | A <sub>0</sub>  | I/O1 | I/O2 | I/O3            | GND      | I/O4            | I/O5            | I/O6            | I/O7            | I/O8           | $\overline{CE1}$ | A <sub>10</sub> | $\overline{OE}$ |

961001EBA1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

**BLOCK DIAGRAM**

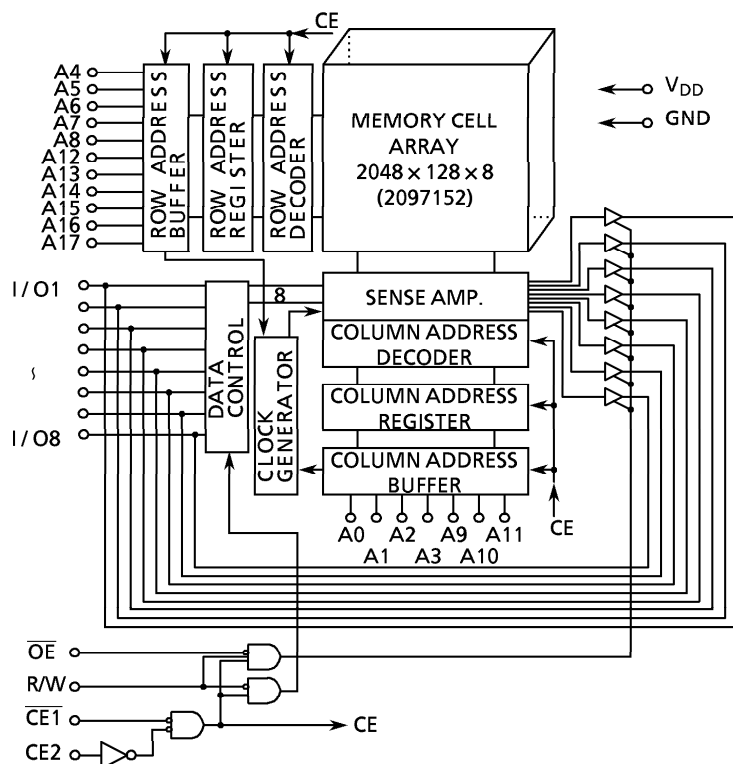

**OPERATION MODE**

| MODE             | $\overline{CE1}$ | CE2 | $\overline{OE}$ | R/W | I/O1 to I/O8     | POWER            |
|------------------|------------------|-----|-----------------|-----|------------------|------------------|
| Read             | L                | H   | L               | H   | D <sub>OUT</sub> | I <sub>DDO</sub> |
| Write            | L                | H   | x               | L   | D <sub>IN</sub>  | I <sub>DDO</sub> |
| Outputs Disabled | L                | H   | H               | H   | High-Z           | I <sub>DDO</sub> |
| Standby          | H                | x   | x               | x   | High-Z           | I <sub>DDS</sub> |
|                  | x                | L   | x               | x   | High-Z           | I <sub>DDS</sub> |

Note: x = don't care. H = logic high. L = logic low.

**ABSOLUTE MAXIMUM RATINGS**

| SYMBOL              | RATING                       | VALUE                          | UNIT |
|---------------------|------------------------------|--------------------------------|------|
| V <sub>DD</sub>     | Power Supply Voltage         | - 0.3 to 4.6                   | V    |
| V <sub>IN</sub>     | Input Voltage                | - 0.3* to 4.6                  | V    |
| V <sub>I/O</sub>    | Input/Output Voltage         | - 0.5 to V <sub>DD</sub> + 0.5 | V    |
| P <sub>D</sub>      | Power Dissipation            | 0.8                            | W    |
| T <sub>solder</sub> | Soldering Temperature (10 s) | 260                            | °C   |
| T <sub>strg.</sub>  | Storage Temperature          | - 55 to 150                    | °C   |
| T <sub>opr.</sub>   | Operating Temperature        | - 40 to 85                     | °C   |

\* - 3.0 V when measured at a pulse width of 50 ns

**DC RECOMMENDED OPERATING CONDITIONS (Ta = -40° to 85°C)**

| SYMBOL          | PARAMETER                     | 2.7 to 3.6 V |     |                       | UNIT |
|-----------------|-------------------------------|--------------|-----|-----------------------|------|
|                 |                               | MIN          | TYP | MAX                   |      |
| V <sub>DD</sub> | Power Supply Voltage          | 2.7          | -   | 3.6                   | V    |
| V <sub>IH</sub> | Input High Voltage            | 2.2          | -   | V <sub>DD</sub> + 0.3 |      |
| V <sub>IL</sub> | Input Low Voltage             | - 0.3*       | -   | 0.6                   |      |
| V <sub>DH</sub> | Data Retention Supply Voltage | 2.0          | -   | 3.6                   |      |

\* - 3.0 V when measured at a pulse width of 50 ns

**DC CHARACTERISTICS (Ta = -40° to 85°C, V<sub>DD</sub> = 2.7 to 3.6 V)**

| SYMBOL                      | PARAMETER                       | TEST CONDITION   | MIN  | TYP                         | MAX        | UNIT              |            |     |     |    |
|-----------------------------|---------------------------------|--|--|-----------------------------|------------|-------------------|------------|-----|-----|----|
| I <sub>IL</sub>             | Input Leakage Current           | V <sub>IN</sub> = 0 V to V <sub>DD</sub>   | -  | -                           | ± 1.0      | μA                |            |     |     |    |
| I <sub>OH</sub>             | Output High Current             | V <sub>OH</sub> = V <sub>DD</sub> - 0.5 V  | -0.5   | -                           | -          | mA                |            |     |     |    |
| I <sub>OL</sub>             | Output Low Current              | V <sub>OL</sub> = 0.4 V  | 2.1  | -                           | -          | mA                |            |     |     |    |
| I <sub>LO</sub>             | Output Leakage Current          | $\overline{CE1} = V_{IH}$ or $CE2 = V_{IL}$ or $R/W = V_{IL}$ or $OE = V_{IH}$ , V <sub>OUT</sub> = 0 V to V <sub>DD</sub>                             | -  | -                           | ± 1.0      | μA                |            |     |     |    |
| I <sub>DDO1</sub>           | Operating Current               | $\overline{CE1} = V_{IL}$ and $CE2 = V_{IH}$ and $R/W = V_{IH}$ , I <sub>OUT</sub> = 0 mA<br>Other Input = V <sub>IH</sub> /V <sub>IL</sub>            | V <sub>DD</sub> = 3 V ± 10%  | Tcycle                      | min        | -                 | -          | 35  | mA  |    |
|                             |                                 |  |  |                             | 1 μs       | -                 | -          | 10  |     |    |
| I <sub>DDO2</sub>           | Operating Current               | $\overline{CE1} = 0.2$ V and $CE2 = V_{DD} - 0.2$ V<br>$R/W = V_{DD} - 0.2$ V, I <sub>OUT</sub> = 0 mA<br>Other Inputs = V <sub>DD</sub> - 0.2 V/0.2 V | V <sub>DD</sub> = 3.3 V ± 0.3 V  | Tcycle                      | min        | -                 | -          | 40  |     |    |
|                             |                                 |  |  |                             | 1 μs       | -                 | -          | 12  |     |    |
| I <sub>DDO2</sub>           | Operating Current               | $\overline{CE1} = 0.2$ V and $CE2 = V_{DD} - 0.2$ V<br>$R/W = V_{DD} - 0.2$ V, I <sub>OUT</sub> = 0 mA<br>Other Inputs = V <sub>DD</sub> - 0.2 V/0.2 V | V <sub>DD</sub> = 3 V ± 10%  | Tcycle                      | min        | -                 | -          | 30  |     |    |
|                             |                                 |  |  |                             | 1 μs       | -                 | -          | 5   |     |    |
| I <sub>DDO2</sub>           | Operating Current               | $\overline{CE1} = 0.2$ V and $CE2 = V_{DD} - 0.2$ V<br>$R/W = V_{DD} - 0.2$ V, I <sub>OUT</sub> = 0 mA<br>Other Inputs = V <sub>DD</sub> - 0.2 V/0.2 V | V <sub>DD</sub> = 3.3 V ± 0.3 V  | Tcycle                      | min        | -                 | -          | 35  |     |    |
|                             |                                 |  |  |                             | 1 μs       | -                 | -          | 6   |     |    |
| I <sub>DDS1</sub>           | Standby Current                 | $\overline{CE1} = V_{IH}$ or $CE2 = V_{IL}$  | -  | -                           | 2          | mA                |            |     |     |    |
| I <sub>DDS2</sub><br>(Note) |                                 | Standby Current  | $\overline{CE1} = V_{DD} - 0.2$ V or $CE2 = 0.2$ V<br>V <sub>DD</sub> = 2.0 to 3.6 V | V <sub>DD</sub> = 3 V ± 10% | Ta = 25°C  | -85, -10          | -          | 1   | 2.5 | μA |
|                             | Ta = -40° to 85°C               |  |  |                             |            | -85L, -10L        | -          | 0.5 | 1.2 |    |
|                             |                                 |  |  |                             |            | -85, -10          | -          | -   | 55  |    |
|                             |                                 |  |  |                             | -85L, -10L | -                 | -          | 35  |     |    |
|                             | V <sub>DD</sub> = 3.3 V ± 0.3 V |  |  |                             | Ta = 25°C  | -85, -10          | -          | 1.5 | 3   |    |
|                             |                                 |  |  |                             |            | Ta = -40° to 85°C | -85L, -10L | -   | 0.7 |    |
|                             |                                 |  |  | -85, -10                    |            |                   | -          | -   | 60  |    |
|                             |                                 |  |  | -85L, -10L                  | -          |                   | -          | 40  |     |    |
|                             |                                 |  |  | V <sub>DD</sub> = 3 V       | Ta = 25°C  | -85, -10          | -          | 1   | 2   |    |
|                             |                                 |  |  |                             |            | Ta = -40° to 40°C | -85L, -10L | -   | 0.5 |    |
|                             | -85, -10                        |  |  |                             |            |                   | -          | -   | 5   |    |
|                             | Ta = -40° to 85°C               |  |  |                             | -85L, -10L |                   | -          | -   | 3   |    |
| -85, -10                    |                                 | -  | -  |                             | 50         |                   |            |     |     |    |
| -85L, -10L                  |                                 | -  | -  |                             | 30         |                   |            |     |     |    |

Note: In standby mode with  $\overline{CE1} \geq V_{DD} - 0.2$  V, these limits are assured for the condition  $CE2 \geq V_{DD} - 0.2$  V or  $CE2 \leq 0.2$  V.

**CAPACITANCE (Ta = 25°C, f = 1 MHz)**

| SYMBOL           | PARAMETER          | TEST CONDITION         | MAX | UNIT |
|------------------|--------------------|------------------------|-----|------|
| C <sub>IN</sub>  | Input Capacitance  | V <sub>IN</sub> = GND  | 10  | pF   |
| C <sub>OUT</sub> | Output Capacitance | V <sub>OUT</sub> = GND | 10  |      |

Note: This parameter is periodically sampled and is not 100% tested.

**AC CHARACTERISTICS AND OPERATING CONDITIONS** ( $T_a = -40^\circ$  to  $85^\circ\text{C}$ ,  $V_{DD} = 2.7$  to  $3.6\text{ V}$ )

**READ CYCLE**

| SYMBOL    | PARAMETER                           | TC55V2001FI/FTI/TRI/STI/SRI |     |           |     | UNIT |
|-----------|-------------------------------------|-----------------------------|-----|-----------|-----|------|
|           |                                     | -85, -85L                   |     | -10, -10L |     |      |
|           |                                     | MIN                         | MAX | MIN       | MAX |      |
| $t_{RC}$  | Read Cycle Time                     | 85                          | –   | 100       | –   | ns   |
| $t_{ACC}$ | Address Access Time                 | –                           | 85  | –         | 100 |      |
| $t_{CO1}$ | Chip Enable (CE1) Access Time       | –                           | 85  | –         | 100 |      |
| $t_{CO2}$ | Chip Enable (CE2) Access Time       | –                           | 85  | –         | 100 |      |
| $t_{OE}$  | Output Enable Access Time           | –                           | 45  | –         | 50  |      |
| $t_{COE}$ | Chip Enable Low to Output Active    | 5                           | –   | 5         | –   |      |
| $t_{OEE}$ | Output Enable Low to Output Active  | 0                           | –   | 0         | –   |      |
| $t_{OD}$  | Chip Enable High to Output High-Z   | –                           | 35  | –         | 40  |      |
| $t_{ODO}$ | Output Enable High to Output High-Z | –                           | 35  | –         | 40  |      |
| $t_{OH}$  | Output Data Hold Time               | 10                          | –   | 10        | –   |      |

**WRITE CYCLE**


| SYMBOL    | PARAMETER                   | TC55V2001FI/FTI/TRI/STI/SRI |     |           |     | UNIT |
|-----------|-----------------------------|-----------------------------|-----|-----------|-----|------|
|           |                             | -85, -85L                   |     | -10, -10L |     |      |
|           |                             | MIN                         | MAX | MIN       | MAX |      |
| $t_{WC}$  | Write Cycle Time            | 85                          | –   | 100       | –   | ns   |
| $t_{WP}$  | Write Pulse Width           | 60                          | –   | 60        | –   |      |
| $t_{CW}$  | Chip Enable to End of Write | 75                          | –   | 80        | –   |      |
| $t_{AS}$  | Address Setup Time          | 0                           | –   | 0         | –   |      |
| $t_{WR}$  | Write Recovery Time         | 0                           | –   | 0         | –   |      |
| $t_{ODW}$ | R/W Low to Output High-Z    | –                           | 35  | –         | 40  |      |
| $t_{OEW}$ | R/W High to Output Active   | 0                           | –   | 0         | –   |      |
| $t_{DS}$  | Data Setup Time             | 35                          | –   | 40        | –   |      |
| $t_{DH}$  | Data Hold Time              | 0                           | –   | 0         | –   |      |

**AC TEST CONDITIONS**


Output load: 100 pF + one TTL gate  
 Input pulse level: 0.4 V, 2.4 V  
 Timing measurements: 1.5 V  
 Reference level: 1.5 V  
 $t_R, t_F$ : 5 ns

**TIMING DIAGRAMS**


**READ CYCLE (See Note 1)**

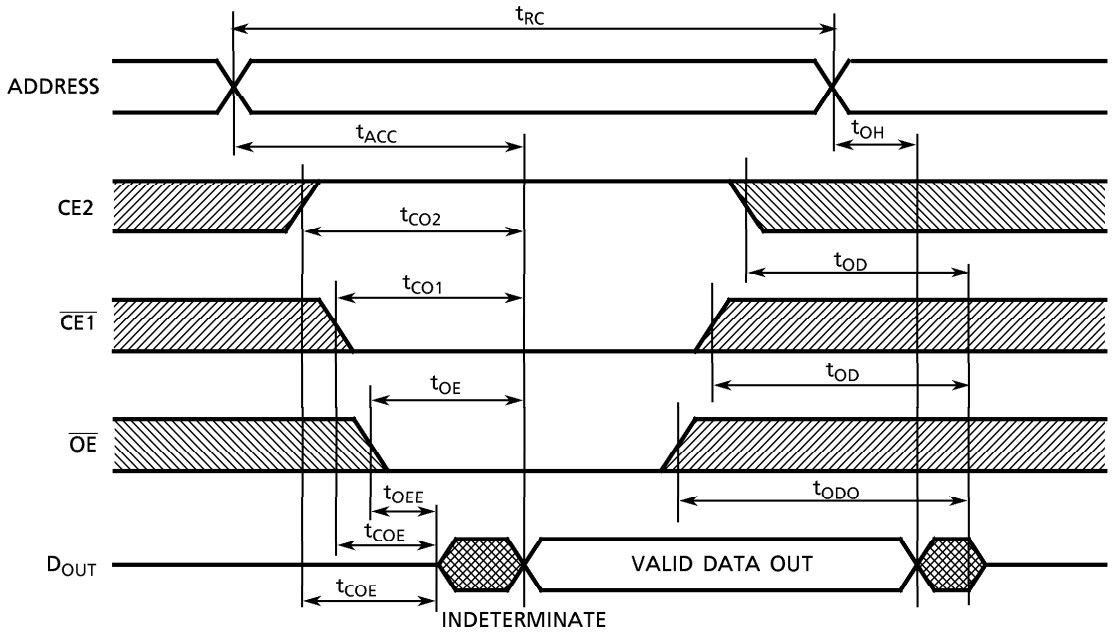


**WRITE CYCLE 1 (R/W CONTROLLED) (See Note 4)**

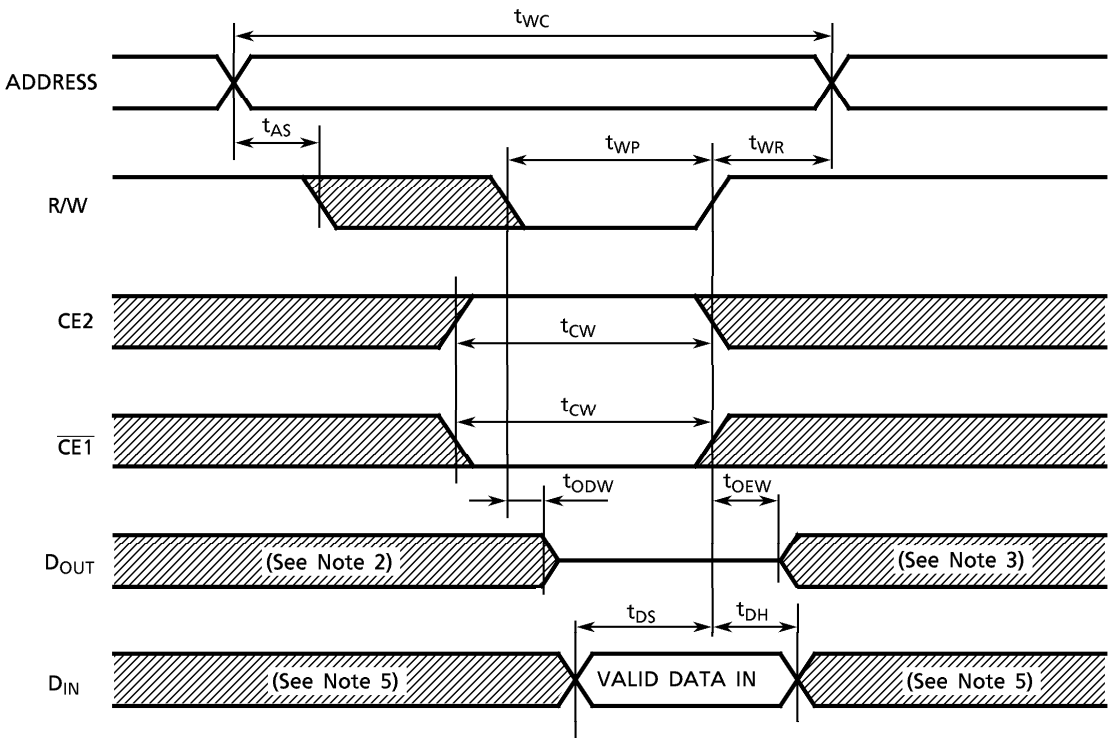

WRITE CYCLE 2 (CE1 CONTROLLED) (See Note 4)

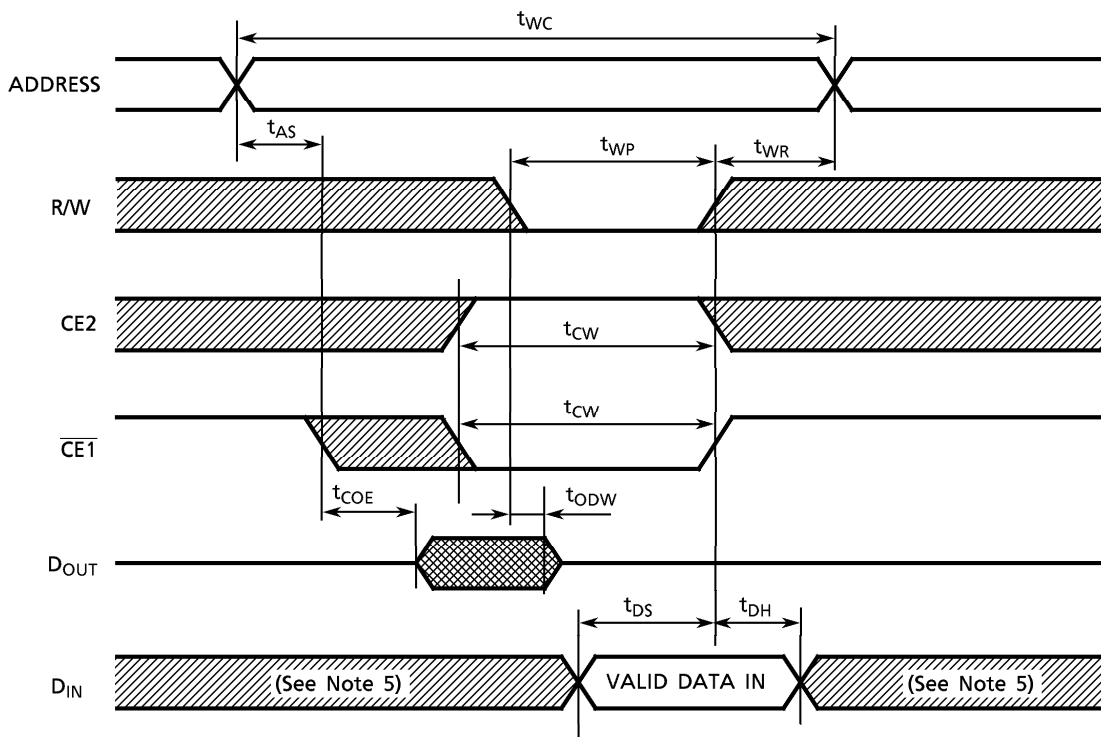

WRITE CYCLE 3 (CE2 CONTROLLED) (See Note 4)

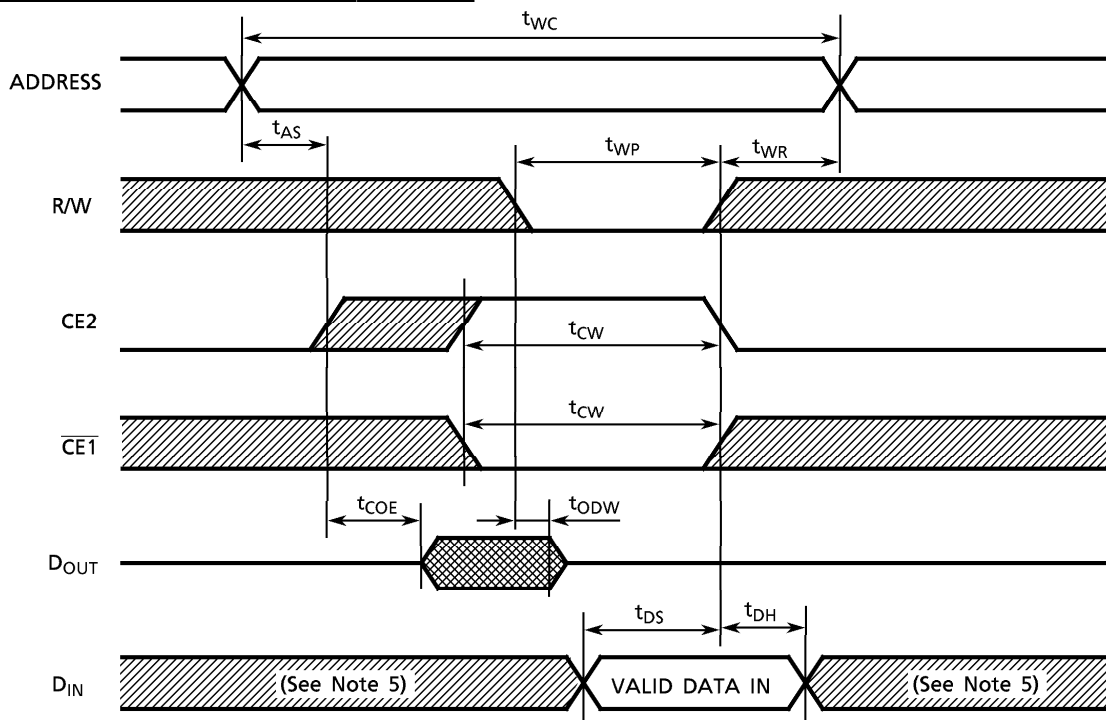

Note: (1) R/W remains HIGH for the read cycle.

(2) If  $\overline{CE1}$  goes LOW (or CE2 goes HIGH) coincident with or after R/W goes LOW, the outputs will remain at high impedance.

(3) If  $\overline{CE1}$  goes HIGH (or CE2 goes LOW) coincident with or before R/W goes HIGH, the outputs will remain at high impedance.


(4) If  $\overline{OE}$  is HIGH during the write cycle, the outputs will remain at high impedance.

(5) Because I/O signals may be in the output state at this time, input signals of reverse polarity must not be applied.


**DATA RETENTION CHARACTERISTICS (Ta = -40° to 85°C)**

| SYMBOL           | PARAMETER                                 |                        | MIN               | TYP        | MAX | UNIT |    |
|------------------|---|------------------------|-------------------|------------|-----|------|----|
| V <sub>DH</sub>  | Data Retention Supply Voltage             |                        | 2.0               | -          | 3.6 | V    |    |
| I <sub>DD2</sub> | Standby Current                           | V <sub>DH</sub> = 3.0V | Ta = -40° to 40°C | -85, -10   | -   | 5    | μA |
|                  |   |                        |                   | -85L, -10L | -   | 3    |    |
|                  |   | V <sub>DH</sub> = 3.6V | Ta = -40° to 85°C | -85, -10   | -   | 50   |    |
|                  |   |                        |                   | -85L, -10L | -   | 30   |    |
| t <sub>CDR</sub> | Chip Deselect to Data Retention Mode Time |                        | 0                 | -          | -   | nS   |    |
| t <sub>R</sub>   | Recovery Time                             |                        | 5                 | -          | -   | mS   |    |

**CE1 CONTROLLED DATA RETENTION MODE (See Note 1)**

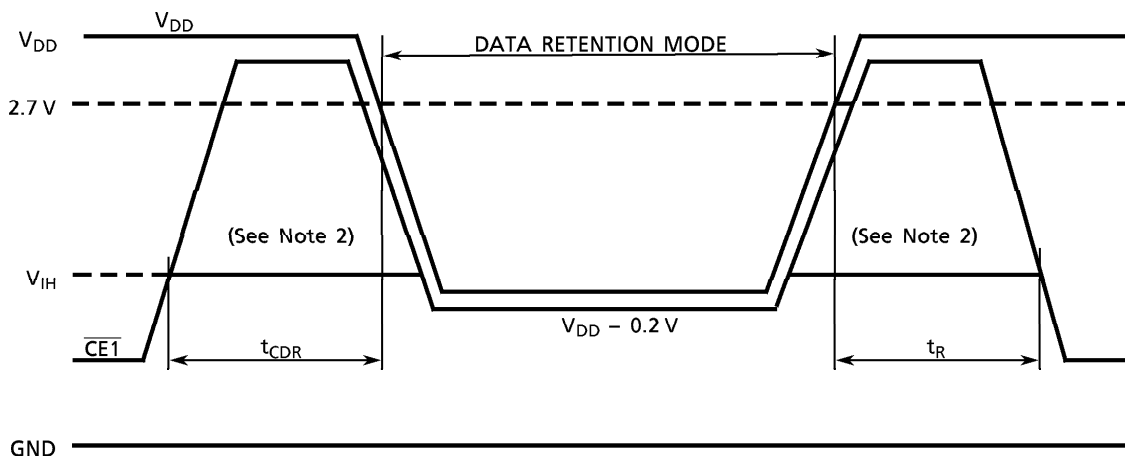

CE2 CONTROLLED DATA RETENTION MODE (See Note 3)

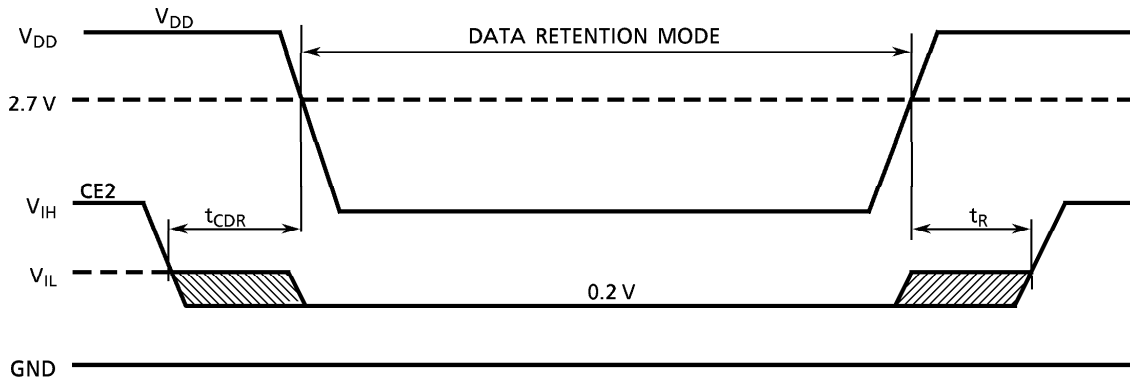


- Note: (1) In  $\overline{CE1}$  controlled data retention mode, minimum standby current mode is entered when  $\overline{CE2} \leq 0.2 \text{ V}$  or  $\overline{CE2} \geq V_{DD} - 0.2 \text{ V}$ .
- (2) When  $\overline{CE1}$  is operating at the  $V_{IH}$  level (2.2 V), the operating current is given by  $I_{DDSI}$  during the transition of  $V_{DD}$  from 3.6 to 2.4 V.
- (3) In CE2 controlled data retention mode, minimum standby current mode is entered when  $\overline{CE2} \leq 0.2 \text{ V}$ .



PACKAGE DIMENSIONS (SOP32-P-525-1.27)


Units in mm

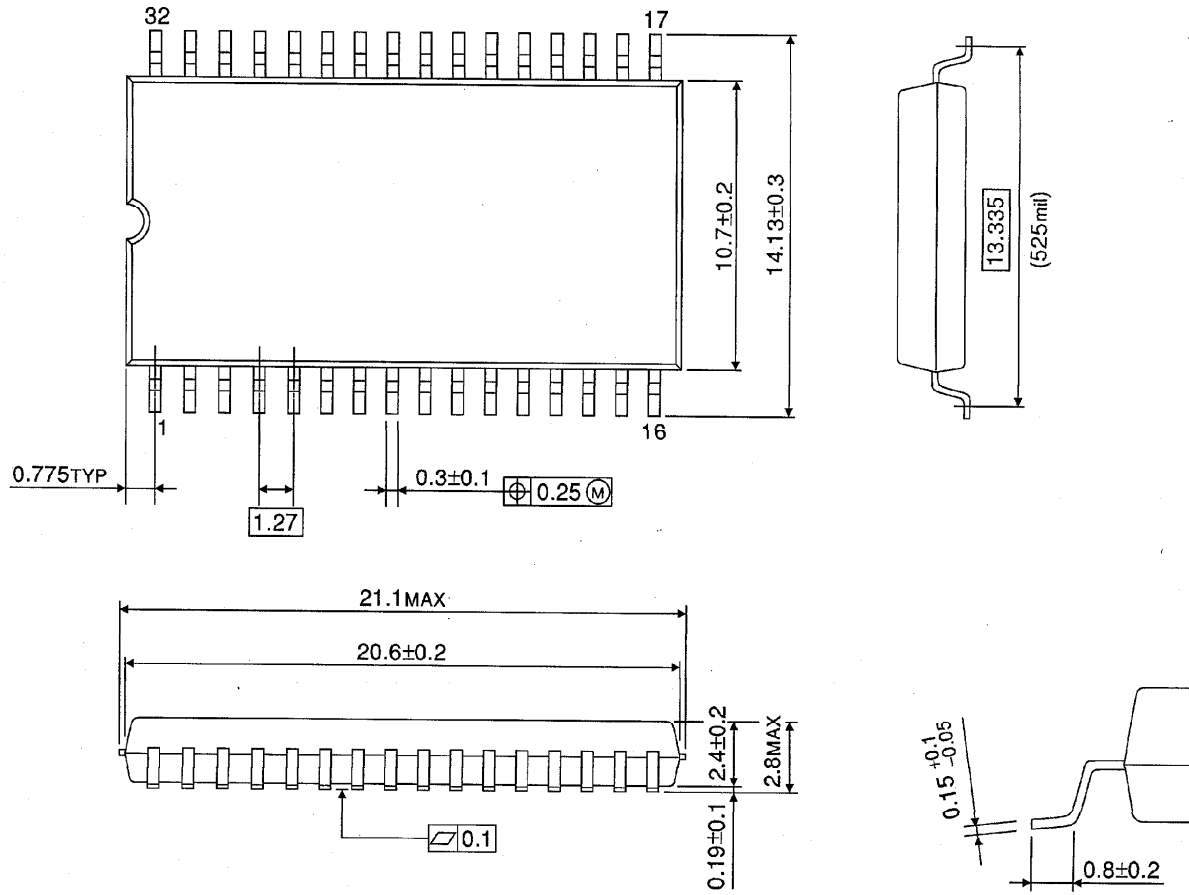

Weight: 1.06 g (typ)

PACKAGE DIMENSIONS (TSOP I 32-P-0820-0.50)


Units in mm

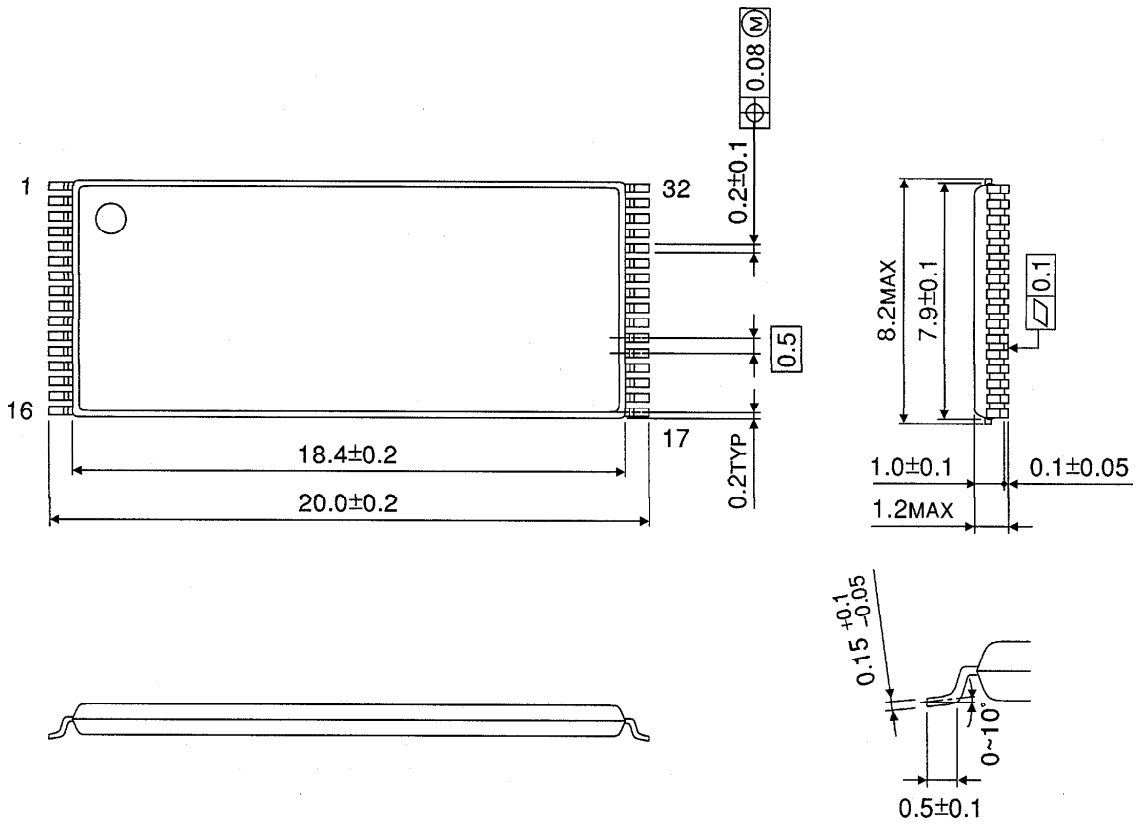

Weight: 0.34 g (typ)

PACKAGE DIMENSIONS (TSOP I 32-P-0820-0.50A)


Units in mm

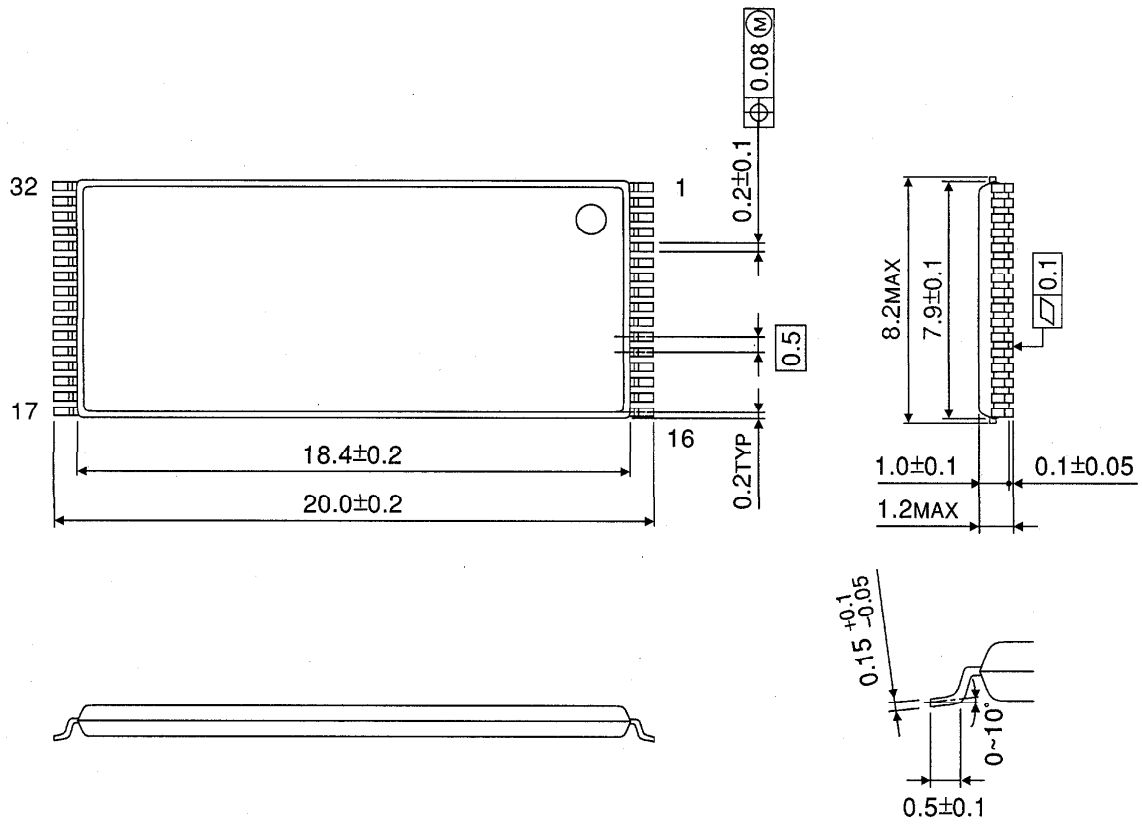

Weight: 0.34 g (typ)

PACKAGE DIMENSIONS (TSOP I 32-P-0.50)


Units in mm

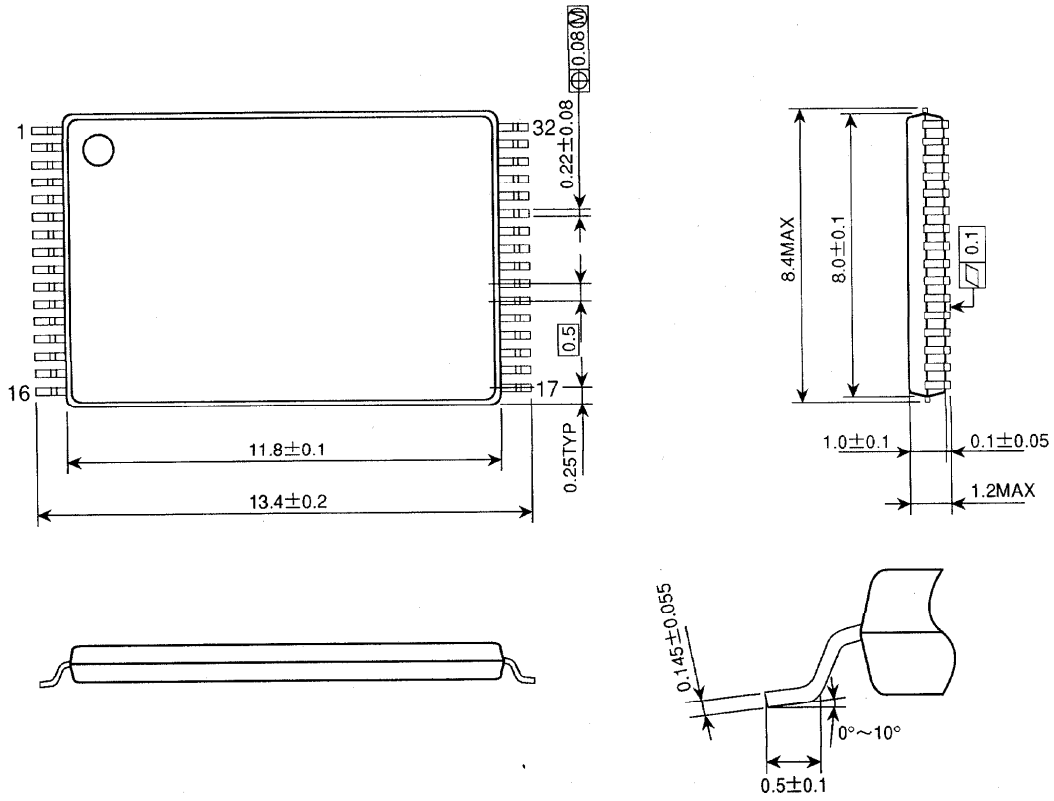

Weight: 0.24 g (typ)

PACKAGE DIMENSIONS (TSOP I 32-P-0.50A)

Units in mm

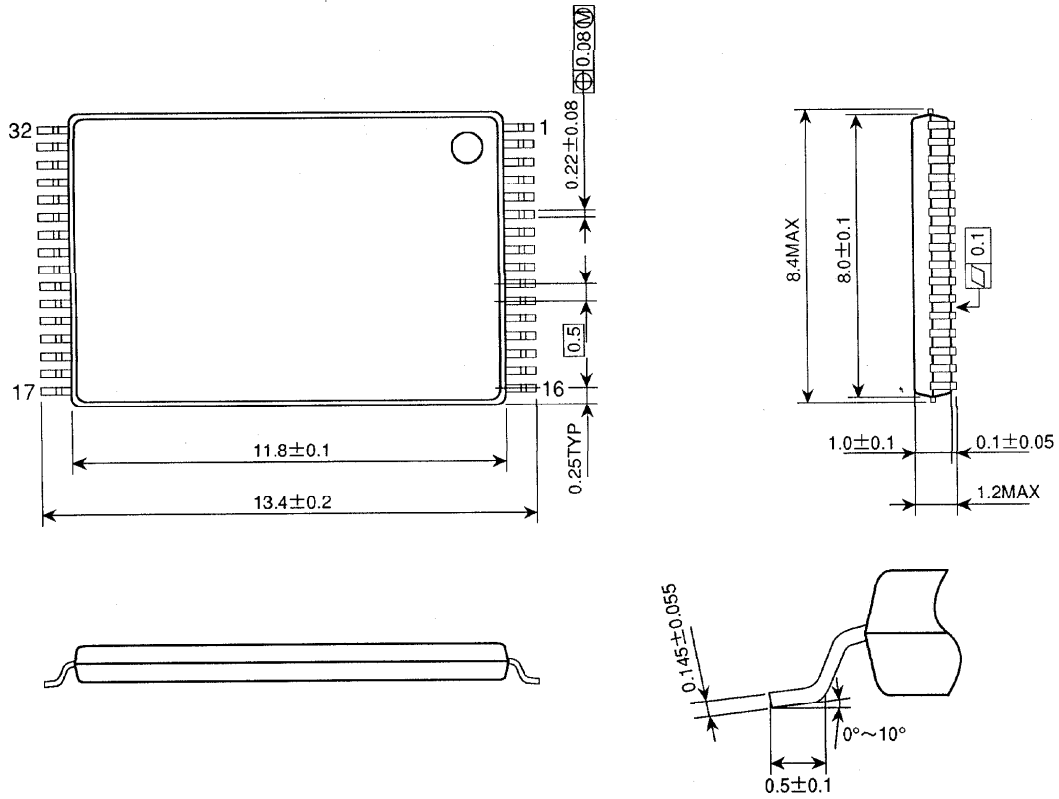

Weight: 0.24 g (typ)