



# 型号说明 Ordering Information

# 技术特性 Specification

## KN3 (C) - 102APE-B2




- 规格 Rating: ( ) 10A 125VAC; 6A 250VAC  
(A) 15A 125VAC; 10A 250VAC  
(AA) 20A 125VAC; 15A 250VAC
- 接触电阻 Contact Resistance: 50mΩ max
- 绝缘电阻 Insulation Resistance: 500VDC 1000MΩ min
- 耐电压 Dielectric Strength: 1500VAC, 1Minute
- 操作温度 Operating Temperature: -25°C ~ +85°C
- 电气寿命 Electrical Life: 10,000 Cycles

## 电路特性 Circuitry trait


01	ON	-	OFF
02	ON	-	ON
12	ON	-	(ON)
03	ON	OFF	ON
13	ON	OFF	(ON)
23	(ON)	OFF	(ON)

( ) : 回弹指示 Indicates Momentary


## 端子种类 Terminal options

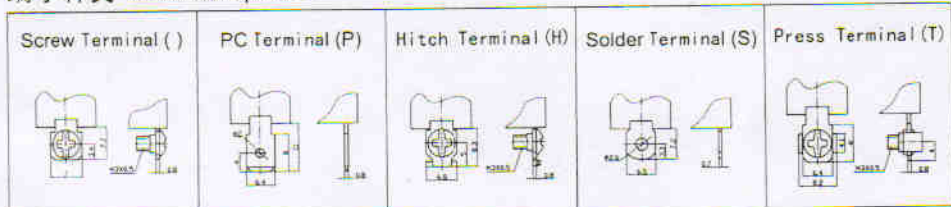


## 手柄种类 Handle options

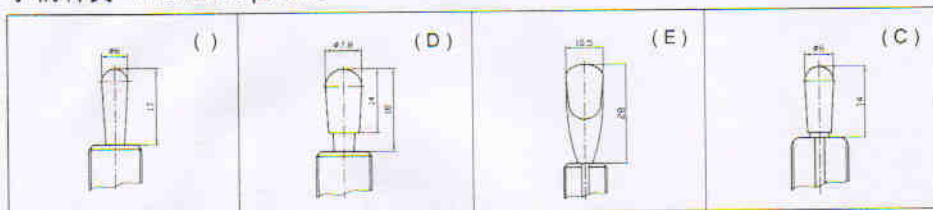

## 特殊基座 Special base

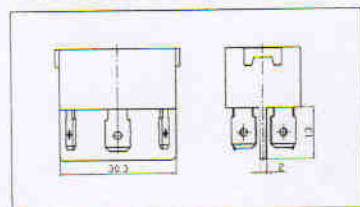

## 铭牌种类 Nameplate options

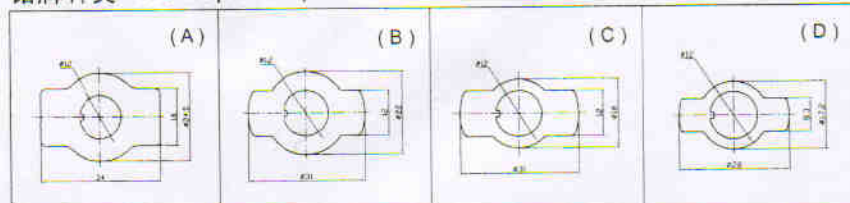

## 铭牌标记 Nameplate mark

1	ON - OFF
2	ON - ON
3	ON - OFF - ON

## 基座颜色 Base color

黑 Black  
棕 Brown  
红 Red

## 防水帽 Water proof cap

