



Silicon Variable Capacitance Diode

- For tuning of extended frequency band
in VHF TV / VTR tuners

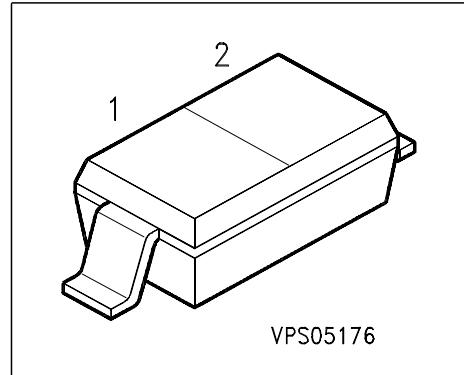

Type	Marking	Ordering Code	Pin Configuration		Package
BB 639C	yellow S	Q62702-B695	1 = C	2 = A	SOD-323

Maximum Ratings

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	30	V
Peak reverse voltage ($R \geq 5k\Omega$)	V_{RM}	35	
Forward current	I_F	20	mA
Operating temperature range	T_{op}	-55 ...+125	$^{\circ}\text{C}$
Storage temperature	T_{stg}	-55 ...+150	


Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC characteristics					
Reverse current $V_R = 30 \text{ V}$	I_R	-	-	10	nA
Reverse current $V_R = 30 \text{ V}, T_A = 85^\circ\text{C}$	I_R	-	-	200	
AC characteristics					
Diode capacitance $V_R = 1 \text{ V}, f = 1 \text{ MHz}$	C_T	36	39	42	pF
$V_R = 2 \text{ V}, f = 1 \text{ MHz}$		27	30.2	33.2	
$V_R = 25 \text{ V}, f = 1 \text{ MHz}$		2.5	2.72	3.05	
$V_R = 28 \text{ V}, f = 1 \text{ MHz}$		2.4	2.55	2.8	
Capacitance ratio $V_R = 2 \text{ V}, V_R = 25 \text{ V}, f = 1 \text{ MHz}$	C_{T2}/C_{T25}	9.5	11.1	-	-
Capacitance ratio $V_R = 1 \text{ V}, V_R = 28 \text{ V}, f = 1 \text{ MHz}$	C_{T1}/C_{T28}	13.5	15.3	-	
Capacitance matching $V_R = 1 \text{ V}, V_R = 28 \text{ V}, f = 1 \text{ MHz}$	$\Delta C_T/C_T$	-	-	2.5	%
Series resistance $V_R = 5 \text{ V}, f = 470 \text{ MHz}$	r_s	-	0.6	0.75	Ω
Series inductance	L_s	-	1.8	-	nH


1) In-line matching. For details please refer to Application Note 047

Diode capacitance $C_T = f(V_R)$

$f = 1\text{MHz}$

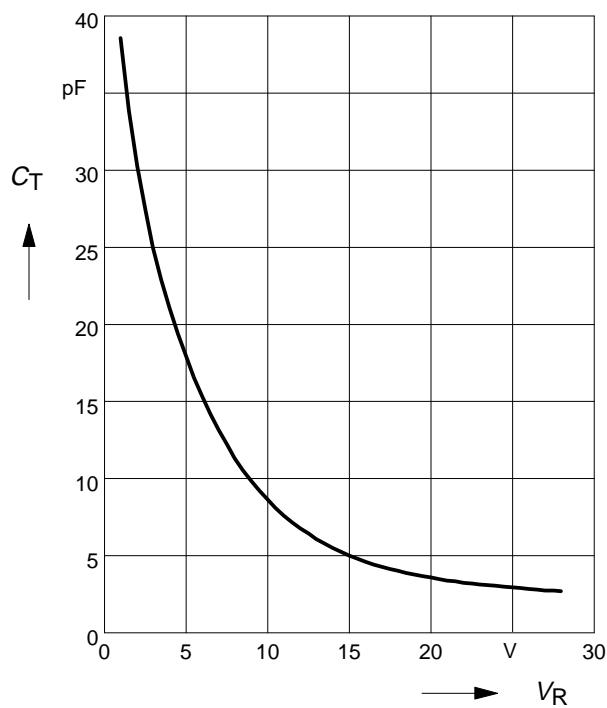


Temperature coefficient of the diode capacitance $T_{Cc} = f(V_R)$

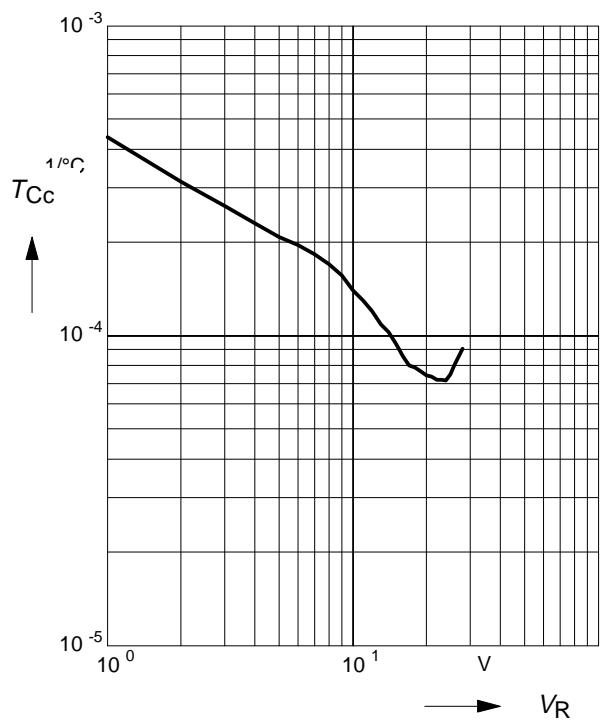

Reverse current $I_R = f(V_R)$

T_A = Parameter

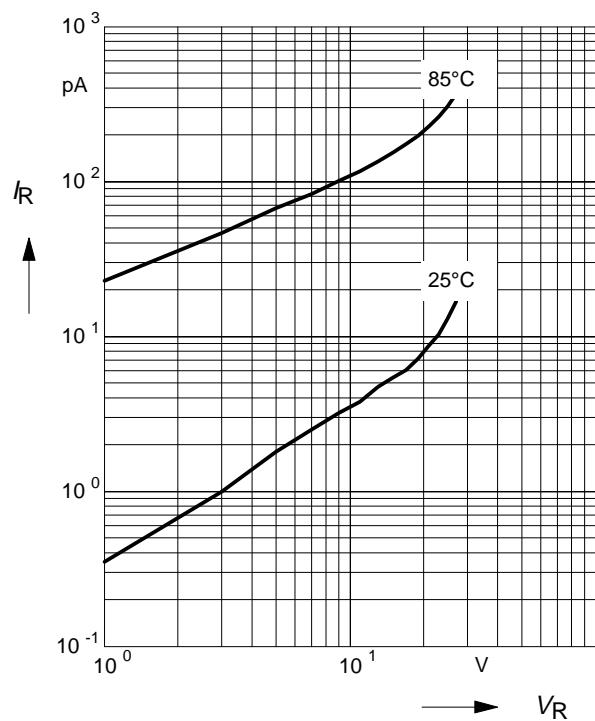

Reverse current $I_R = f(T_A)$

$V_R = 28\text{V}$

