

**Table 1: General Features**

TYPE	V <sub>CES</sub>	V <sub>CE(sat)</sub> (Max) @25°C	I <sub>C</sub> @100°C
STGP7NC60HD	600 V	< 2.5 V	14 A
STGF7NC60HD	600 V	< 2.5 V	6 A
STGB7NC60HD	600 V	< 2.5 V	14 A

- LOWER ON-VOLTAGE DROP (V<sub>cesat</sub>)
- OFF LOSSES INCLUDE TAIL CURRENT
- LOSSES INCLUDE DIODE RECOVERY ENERGY
- LOWER C<sub>RES</sub>/C<sub>IES</sub> RATIO
- HIGH FREQUENCY OPERATION UP TO 70 KHz
- VERY SOFT ULTRA FAST RECOVERY ANTI PARALLEL DIODE
- NEW GENERATION PRODUCTS WITH TIGHTER PARAMETER DISTRIBUTION

### DESCRIPTION

Using the latest high voltage technology based on a patented strip layout, STMicroelectronics has designed an advanced family of IGBTs, the PowerMESH™ IGBTs, with outstanding performances. The suffix "H" identifies a family optimized for high frequency applications in order to achieve very high switching performances (reduced t<sub>fall</sub>) maintaining a low voltage drop.


### APPLICATIONS

- HIGH FREQUENCY INVERTERS
- SMPS AND PFC IN BOTH HARD SWITCH AND RESONANT TOPOLOGIES
- MOTOR DRIVERS


**Table 2: Order Code**

PART NUMBER	MARKING	PACKAGE	PACKAGING
STGP7NC60HD	GP7NC60HD	TO-220	TUBE
STGF7NC60HD	GF7NC60HD	TO-220FP	TUBE
STGB7NC60HDT4	GB7NC60HD	D <sup>2</sup> PAK	TAPE & REEL

**Figure 1: Package**

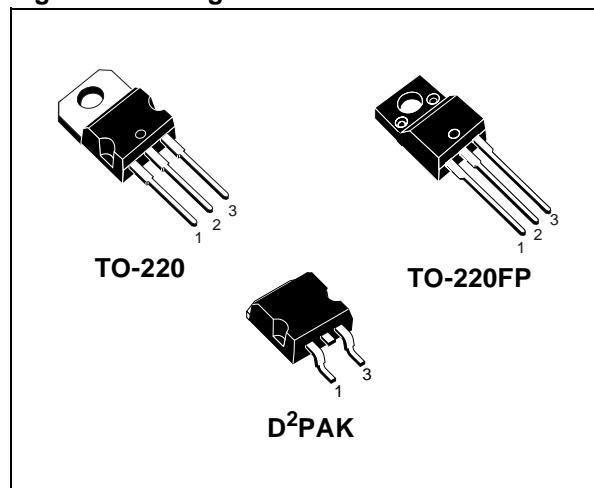

**Figure 2: Internal Schematic Diagram**

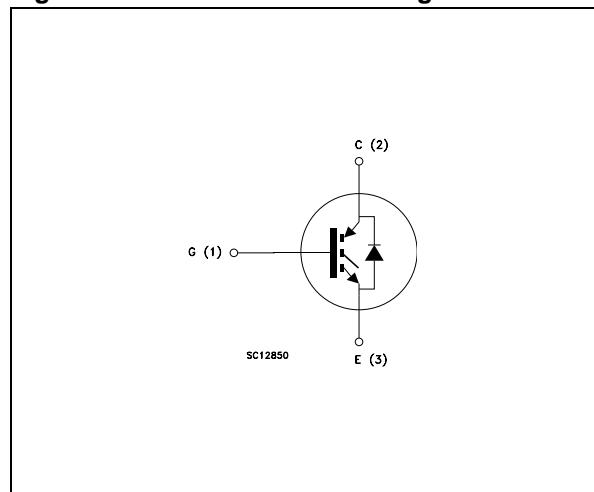

**Table 3: Absolute Maximum ratings**

Symbol	Parameter	Value		Unit
		STGP7NC60HD STGB7NC60HD	STGF7NC60HD	
V <sub>CES</sub>	Collector-Emitter Voltage ( $V_{GS} = 0$ )	600		V
V <sub>ECR</sub>	Emitter-Collector Voltage	20		V
V <sub>GE</sub>	Gate-Emitter Voltage	$\pm 20$		V
I <sub>C</sub>	Collector Current (continuous) at $T_C = 25^\circ\text{C}$ (#)	25	10	A
I <sub>C</sub>	Collector Current (continuous) at $T_C = 100^\circ\text{C}$ (#)	14	6	A
I <sub>CM</sub> (✉)	Collector Current (pulsed)	50		A
I <sub>F</sub>	Diode RMS Forward Current at $T_C = 25^\circ\text{C}$	20		A
P <sub>TOT</sub>	Total Dissipation at $T_C = 25^\circ\text{C}$	80	25	W
	Derating Factor	0.64	0.20	W/ $^\circ\text{C}$
V <sub>ISO</sub>	Insulation Withstand Voltage A.C. ( $t = 1 \text{ sec}$ ; $T_C = 25^\circ\text{C}$ )	--	2500	V
T <sub>stg</sub>	Storage Temperature	– 55 to 150		$^\circ\text{C}$
T <sub>j</sub>	Operating Junction Temperature			

(✉) Pulse width limited by max. junction temperature.

**Table 4: Thermal Data**

			Min.	Typ.	Max.	
R <sub>thj-case</sub>	Thermal Resistance Junction-case	TO-220 D <sup>2</sup> PAK			1.56	$^\circ\text{C/W}$
		TO-220FP			5.0	$^\circ\text{C/W}$
R <sub>thj-amb</sub>	Thermal Resistance Junction-ambient				62.5	$^\circ\text{C/W}$
T <sub>L</sub>	Maximum Lead Temperature for Soldering Purpose (1.6 mm from case, for 10 sec.)			300		$^\circ\text{C}$

## ELECTRICAL CHARACTERISTICS ( $T_{CASE} = 25^\circ\text{C}$ UNLESS OTHERWISE SPECIFIED)

**Table 5: Main Parameters**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V <sub>BR(CES)</sub>	Collector-Emitter Breakdown Voltage	I <sub>C</sub> = 1 mA, V <sub>GE</sub> = 0	600			V
I <sub>CES</sub>	Collector cut-off Current ( $V_{GE} = 0$ )	V <sub>CE</sub> = Max Rating, $T_C = 25^\circ\text{C}$ V <sub>CE</sub> = Max Rating, $T_C = 125^\circ\text{C}$			10 1	$\mu\text{A}$ mA
I <sub>GES</sub>	Gate-Emitter Leakage Current ( $V_{CE} = 0$ )	V <sub>GE</sub> = $\pm 20\text{V}$ , V <sub>CE</sub> = 0			$\pm 100$	nA
V <sub>GE(th)</sub>	Gate Threshold Voltage	V <sub>CE</sub> = V <sub>GE</sub> , I <sub>C</sub> = 250 $\mu\text{A}$	3.75		5.75	V
V <sub>CE(sat)</sub>	Collector-Emitter Saturation Voltage	V <sub>GE</sub> = 15V, I <sub>C</sub> = 7 A V <sub>GE</sub> = 15V, I <sub>C</sub> = 7 A, T <sub>c</sub> = 125°C		1.85 1.7	2.5	V V

(#) Calculated according to the iterative formula:

$$I_C(T_C) = \frac{T_{JMAX} - T_C}{R_{THJ-C} \times V_{CESAT(MAX)}(T_C, I_C)}$$

**ELECTRICAL CHARACTERISTICS (CONTINUED)**

**Table 6: Dynamic**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$g_{fs}$ (1)	Forward Transconductance	$V_{CE} = 15 \text{ V}$ , $I_C = 7 \text{ A}$		4.30		S
$C_{ies}$	Input Capacitance	$V_{CE} = 25 \text{ V}$ , $f = 1 \text{ MHz}$ , $V_{GE} = 0$		720		pF
$C_{oes}$	Output Capacitance			81		pF
$C_{res}$	Reverse Transfer Capacitance			17		pF
$Q_g$	Total Gate Charge	$V_{CE} = 390 \text{ V}$ , $I_C = 7 \text{ A}$ ,		35		nC
$Q_{ge}$	Gate-Emitter Charge	$V_{GE} = 15 \text{ V}$		7		nC
$Q_{gc}$	Gate-Collector Charge	(see Figure 22)		16		nC
$I_{CL}$	Turn-Off SOA Minimum Current	$V_{clamp} = 480 \text{ V}$ , $T_j = 150^\circ\text{C}$ , $R_G = 10 \Omega$ , $V_{GE} = 15 \text{ V}$	50			A

(1) Pulsed: Pulse duration= 300  $\mu\text{s}$ , duty cycle 1.5%

**Table 7: Switching On**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on Delay Time	$V_{CC} = 390 \text{ V}$ , $I_C = 7 \text{ A}$		18.5		ns
$t_r$ ( $dI/dt$ ) <sub>on</sub>	Current Rise Time	$R_G = 10 \Omega$ , $V_{GE} = 15 \text{ V}$ , $T_j = 25^\circ\text{C}$		8.5		ns
	Turn-on Current Slope	(see Figure 19)		1060		A/ $\mu\text{s}$
$t_{d(on)}$	Turn-on Delay Time	$V_{CC} = 390 \text{ V}$ , $I_C = 7 \text{ A}$		18.5		ns
$t_r$ ( $dI/dt$ ) <sub>on</sub>	Current Rise Time	$R_G = 10 \Omega$ , $V_{GE} = 15 \text{ V}$ , $T_j = 125^\circ\text{C}$		7		ns
	Turn-on Current Slope	(see Figure 20)		1000		A/ $\mu\text{s}$

**Table 8: Switching Off**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$t_r(V_{off})$	Off Voltage Rise Time	$V_{cc} = 390 \text{ V}$ , $I_C = 7 \text{ A}$ ,		27		ns
$t_d(off)$	Turn-off Delay Time	$R_G = 10 \Omega$ , $V_{GE} = 15 \text{ V}$		72		ns
$t_f$	Current Fall Time	$T_j = 25^\circ\text{C}$ (see Figure 20)		60		ns
$t_r(V_{off})$	Off Voltage Rise Time	$V_{cc} = 390 \text{ V}$ , $I_C = 7 \text{ A}$ ,		56		ns
$t_d(off)$	Turn-off Delay Time	$R_G = 10 \Omega$ , $V_{GE} = 15 \text{ V}$		116		ns
$t_f$	Current Fall Time	$T_j = 125^\circ\text{C}$ (see Figure 20)		105		ns

**Table 9: Switching Energy**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max	Unit
$E_{on}$ (2)	Turn-on Switching Losses	$V_{CC} = 390 \text{ V}$ , $I_C = 7 \text{ A}$		95	125	$\mu\text{J}$
$E_{off}$ (3)	Turn-off Switching Loss	$R_G = 10 \Omega$ , $V_{GE} = 15 \text{ V}$ , $T_j = 25^\circ\text{C}$		115	150	$\mu\text{J}$
$E_{ts}$	Total Switching Loss	(see Figure 19)		210	275	$\mu\text{J}$
$E_{on}$ (2)	Turn-on Switching Losses	$V_{CC} = 390 \text{ V}$ , $I_C = 7 \text{ A}$		140		$\mu\text{J}$
$E_{off}$ (3)	Turn-off Switching Loss	$R_G = 10 \Omega$ , $V_{GE} = 15 \text{ V}$ , $T_j = 125^\circ\text{C}$		215		$\mu\text{J}$
$E_{ts}$	Total Switching Loss	(see Figure 20)		355		$\mu\text{J}$


(2) Eon is the turn-on losses when a typical diode is used in the test circuit in figure 2. If the IGBT is offered in a package with a co-pack diode, the co-pack diode is used as external diode. IGBTs & DIODE are at the same temperature ( $25^\circ\text{C}$  and  $125^\circ\text{C}$ )

(3) Turn-off losses include also the tail of the collector current.


**Table 10: Collector-Emitter Diode**

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
$V_f$	Forward On-Voltage	$I_f = 3.5 \text{ A}$ $I_f = 3.5 \text{ A}, T_j = 125 \text{ }^\circ\text{C}$		1.3 1.1	1.9	V V
$t_{rr}$	Reverse Recovery Time	$I_f = 7 \text{ A}, V_R = 40 \text{ V},$ $T_j = 25 \text{ }^\circ\text{C}, di/dt = 100 \text{ A}/\mu\text{s}$		37		ns
$t_a$				22		ns
$Q_{rr}$	Reverse Recovery Charge			40		nC
$I_{rrm}$	Reverse Recovery Current			2.1		A
S	Softness factor of the diode			0.68		
$t_{rr}$	Reverse Recovery Time	$I_f = 7 \text{ A}, V_R = 40 \text{ V},$ $T_j = 125 \text{ }^\circ\text{C}, di/dt = 100 \text{ A}/\mu\text{s}$		61		ns
$t_a$				34		ns
$Q_{rr}$	Reverse Recovery Charge			98		nC
$I_{rrm}$	Reverse Recovery Current			3.2		A
S	Softness factor of the diode			0.79		


**Figure 3: Output Characteristics**

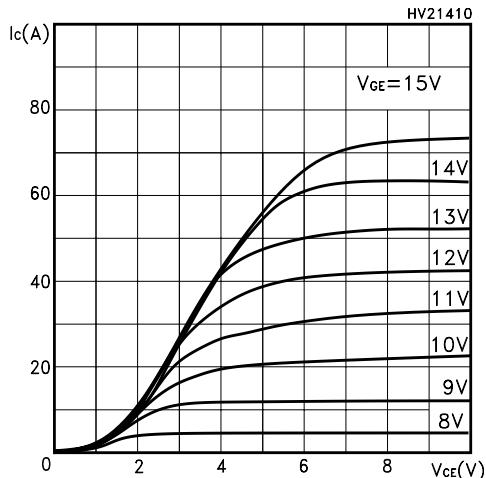


**Figure 6: Transfer Characteristics**

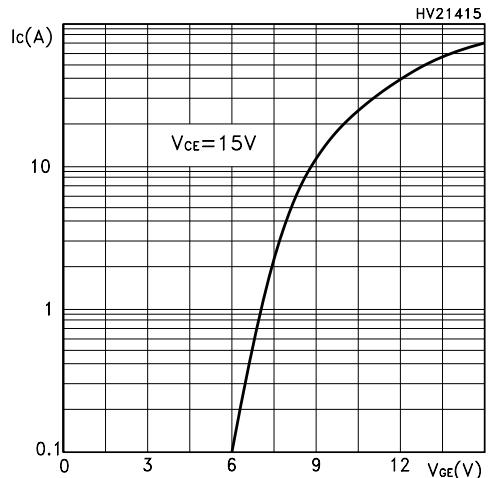


**Figure 4: Transconductance**

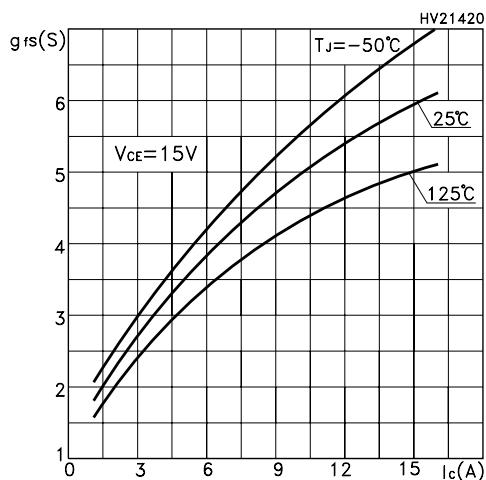


**Figure 5: Collector-Emitter On Voltage vs Collector Current**

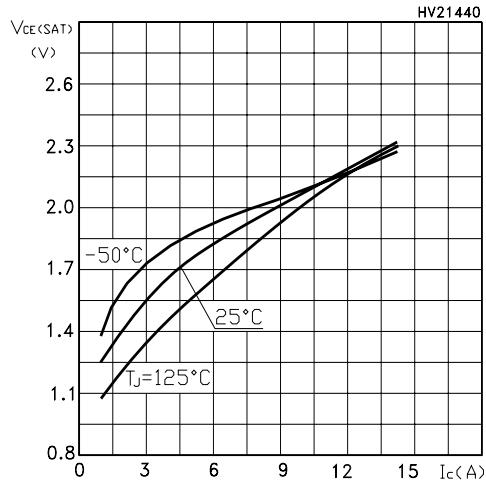


**Figure 7: Collector-Emitter On Voltage vs Temperature**

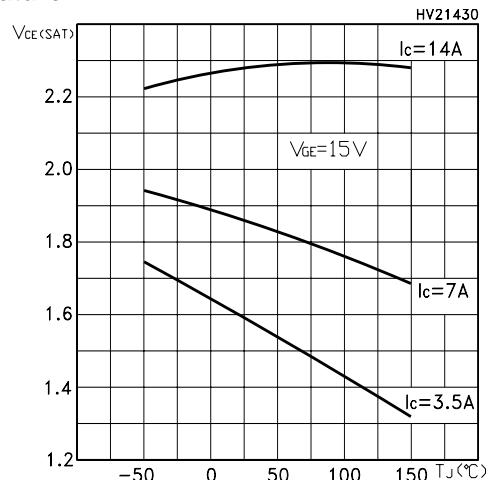


**Figure 8: Normalized Gate Threshold vs Temperature**

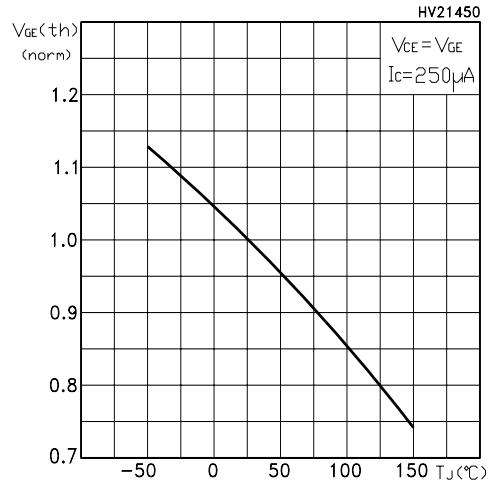


**Figure 9: Normalized Breakdown Voltage vs Temperature**

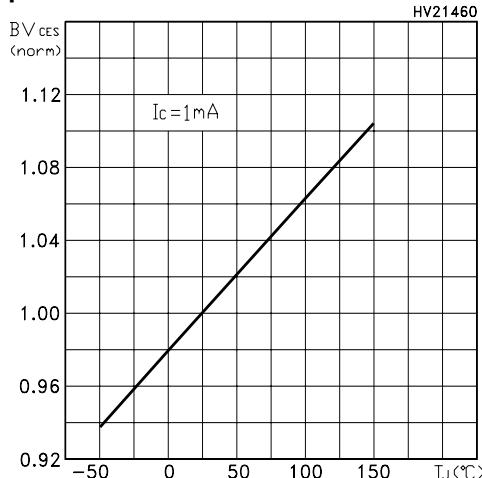


**Figure 10: Capacitance Variations**

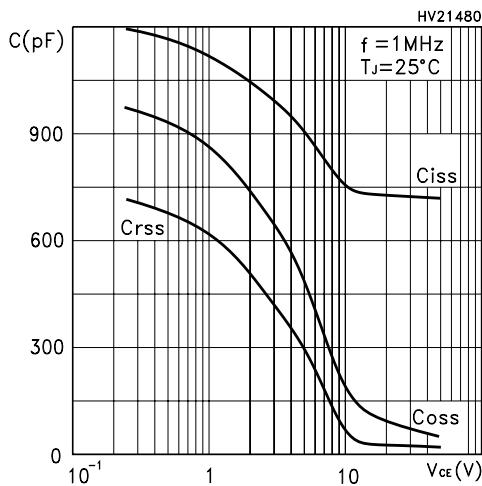


**Figure 11: Total Switching Losses vs Gate Resistance**

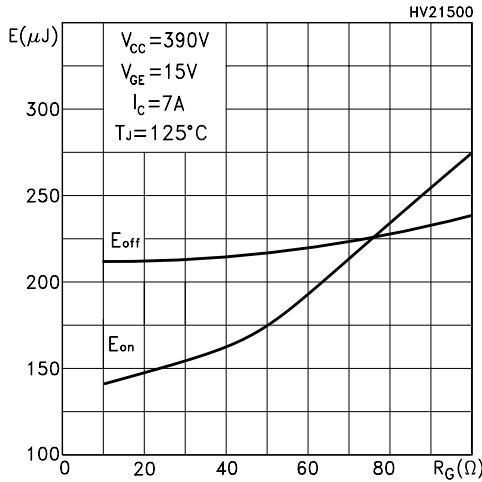


**Figure 12: Gate Charge vs Gate-Emitter Voltage**

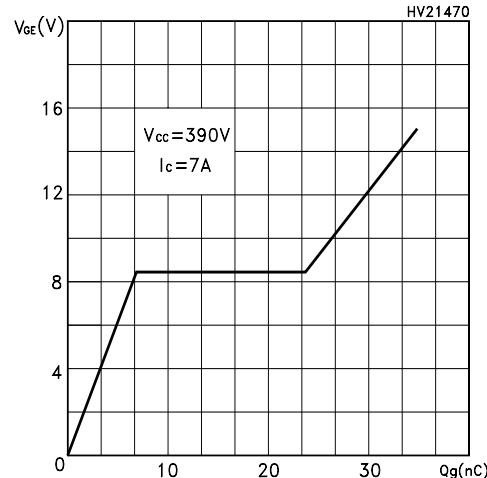


**Figure 13: Total Switching Losses vs Temperature**

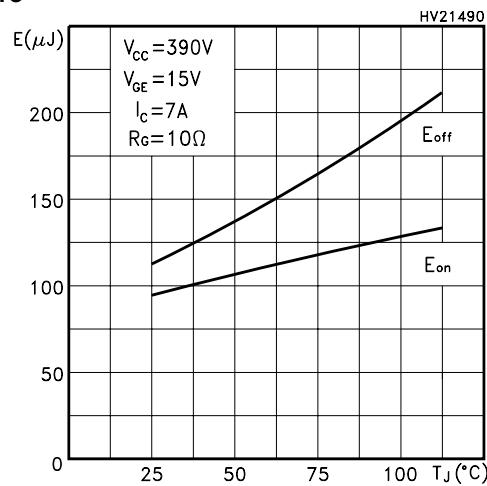


**Figure 14: Total Switching Losses vs Collector Current**

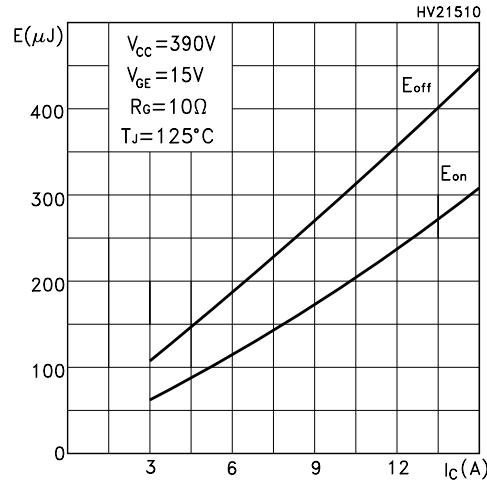


**Figure 15: Thermal Impedance For TO-220/D<sup>2</sup>PAK**

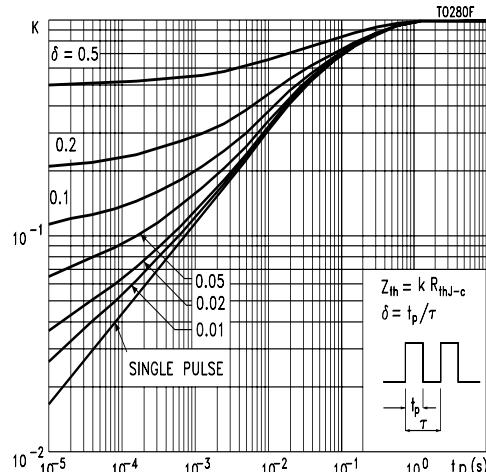


**Figure 16: Thermal Impedance For TO-220FP**

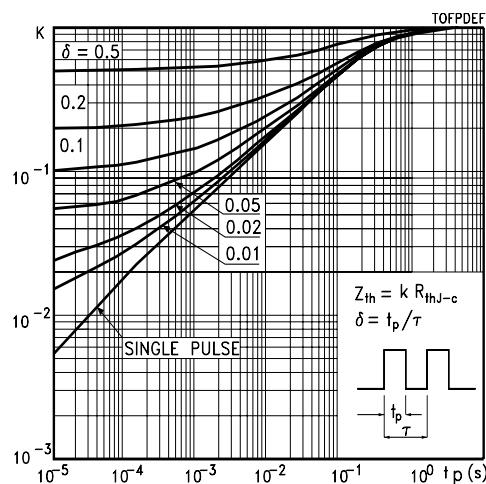


**Figure 17: Turn-Off SOA**

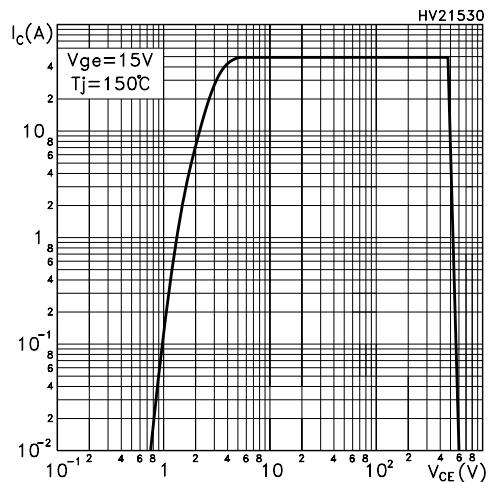

**Figure 18: Emitter-Collector Diode Characteristics**

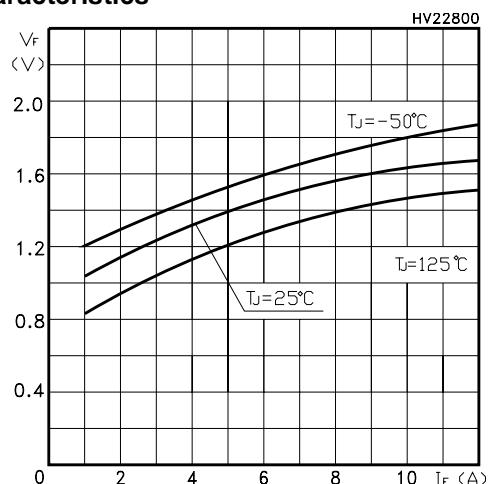

**Figure 19: Ic vs Frequency**

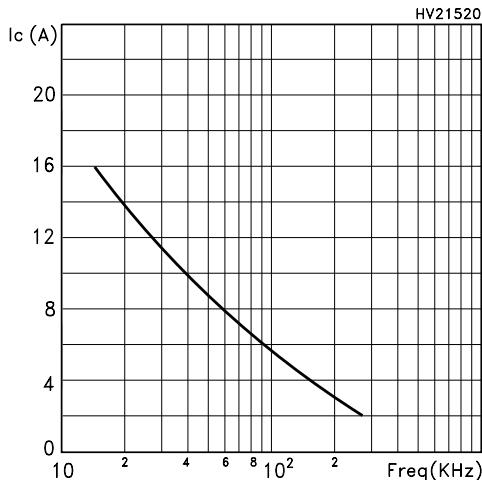

For a fast IGBT suitable for high frequency applications, the typical collector current vs. maximum operating frequency curve is reported. That frequency is defined as follows:

$$f_{MAX} = (P_D - P_C) / (E_{ON} + E_{OFF})$$

- 1) The maximum power dissipation is limited by maximum junction to case thermal resistance:

$$P_D = \Delta T / R_{THJ-C}$$

considering  $\Delta T = T_J - T_C = 125^\circ\text{C} - 75^\circ\text{C} = 50^\circ\text{C}$

- 2) The conduction losses are:

$$P_C = I_C * V_{CE(SAT)} * \delta$$


with 50% of duty cycle,  $V_{CESAT}$  typical value @125°C.

- 3) Power dissipation during ON & OFF commutations is due to the switching frequency:


$$P_{SW} = (E_{ON} + E_{OFF}) * freq.$$

- 4) Typical values @ 125°C for switching losses are used (test conditions:  $V_{CE} = 390\text{V}$ ,  $V_{GE} = 15\text{V}$ ,  $R_G = 3.3\text{ Ohm}$ ). Furthermore, diode recovery energy is included in the  $E_{ON}$  (see note 2), while the tail of the collector current is included in the  $E_{OFF}$  measurements (see note 3).


**Figure 20: Test Circuit for Inductive Load Switching**

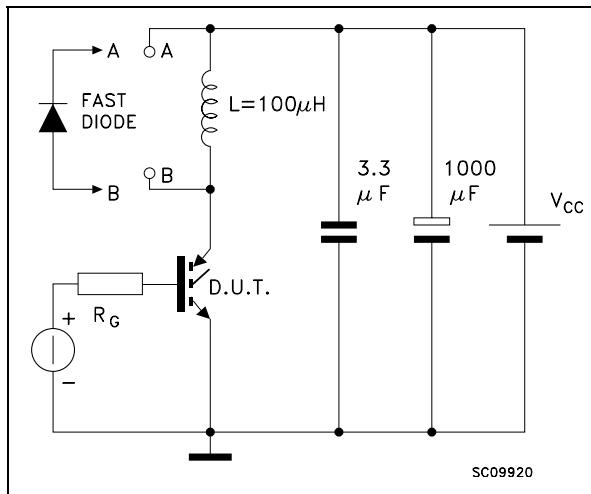


**Figure 21: Switching Waveforms**

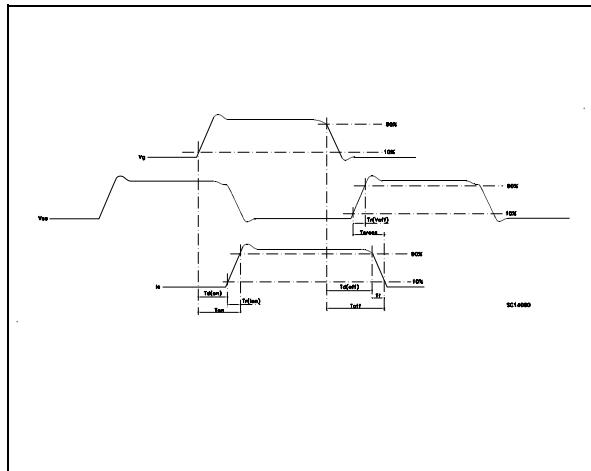

**Figure 22: Gate Charge Test Circuit**

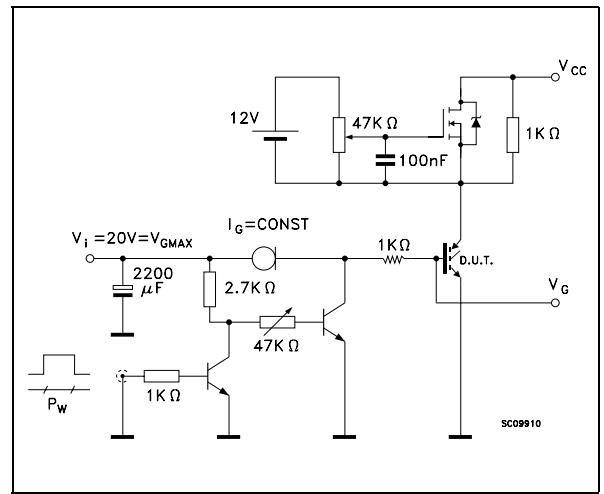


**Figure 23: Diode Recovery Time Waveforms**

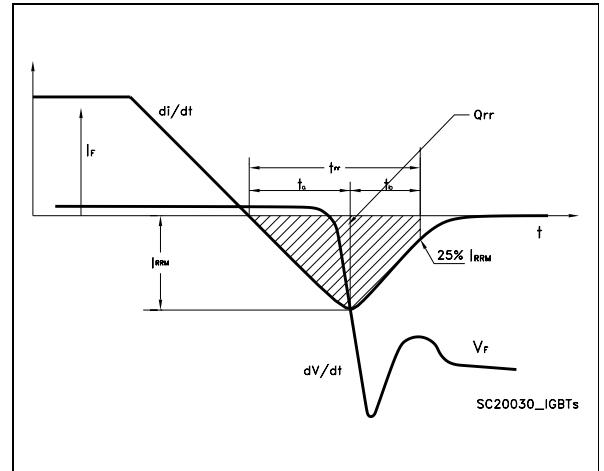


## TO-220 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
b	0.61		0.88	0.024		0.034
b1	1.15		1.70	0.045		0.066
c	0.49		0.70	0.019		0.027
D	15.25		15.75	0.60		0.620
E	10		10.40	0.393		0.409
e	2.40		2.70	0.094		0.106
e1	4.95		5.15	0.194		0.202
F	1.23		1.32	0.048		0.052
H1	6.20		6.60	0.244		0.256
J1	2.40		2.72	0.094		0.107
L	13		14	0.511		0.551
L1	3.50		3.93	0.137		0.154
L20		16.40			0.645	
L30		28.90			1.137	
øP	3.75		3.85	0.147		0.151
Q	2.65		2.95	0.104		0.116

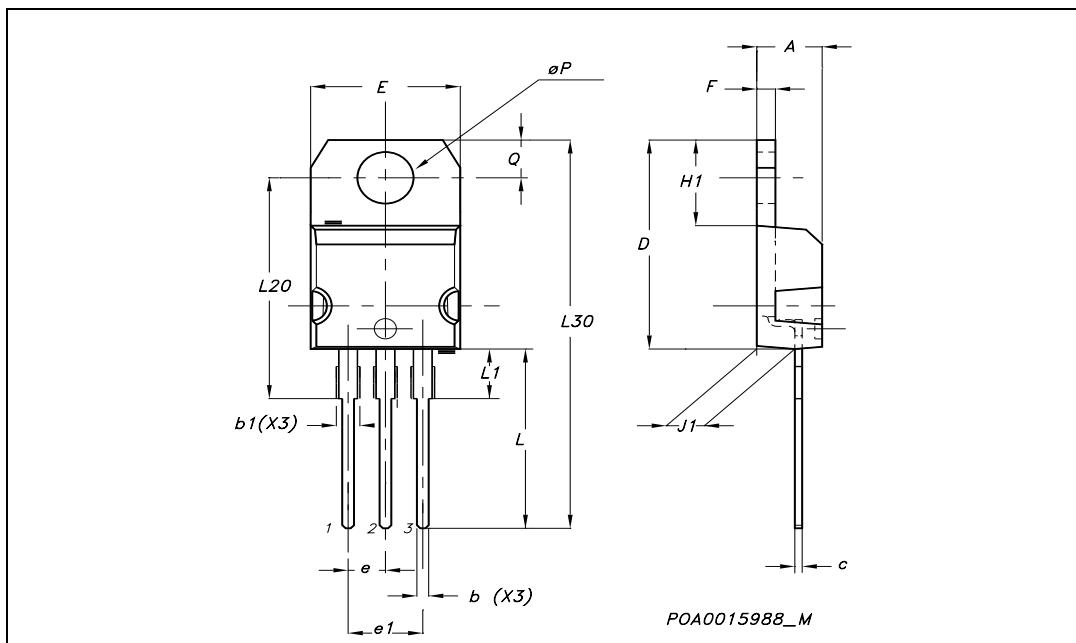


## TO-220FP MECHANICAL DATA


DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.4		4.6	0.173		0.181
B	2.5		2.7	0.098		0.106
D	2.5		2.75	0.098		0.108
E	0.45		0.7	0.017		0.027
F	0.75		1	0.030		0.039
F1	1.15		1.7	0.045		0.067
F2	1.15		1.7	0.045		0.067
G	4.95		5.2	0.195		0.204
G1	2.4		2.7	0.094		0.106
H	10		10.4	0.393		0.409
L2		16			0.630	
L3	28.6		30.6	1.126		1.204
L4	9.8		10.6	.0385		0.417
L5	2.9		3.6	0.114		0.141
L6	15.9		16.4	0.626		0.645
L7	9		9.3	0.354		0.366
Ø	3		3.2	0.118		0.126

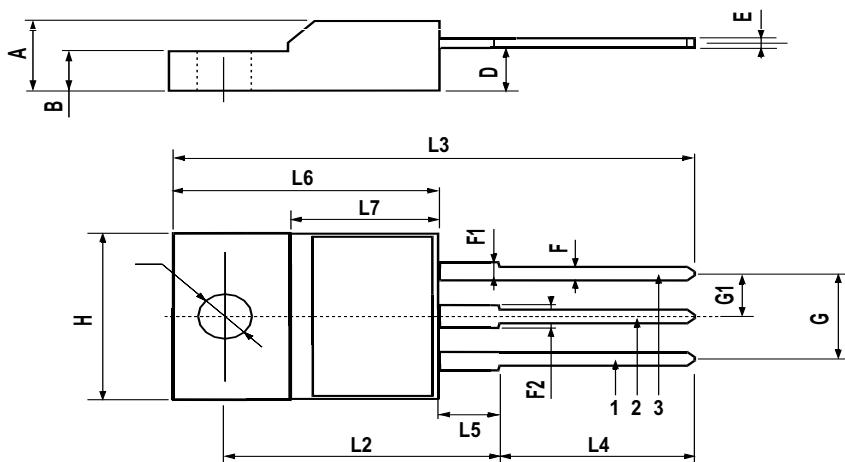

TO-263 (D<sup>2</sup>PAK) MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	4.32		4.57	0.178		0.180
A1	0.00		0.25	0.00		0.009
b	0.71		0.91	0.028		0.350
b2	1.15		1.40	0.045		0.055
c	0.46		0.61	0.018		0.024
c2	1.22		1.40	0.048		0.055
D	8.89	9.02	9.40	0.350	0.355	0.370
D1	8.01			0.315		
E	10.04		10.28	0.395		0.404
e		2.54			0.010	
H	13.10		13.70	0.515		0.540
L	1.30		1.70	0.051		0.067
L1	1.15		1.39	0.045		0.054
L2	1.27		1.77	0.050		0.069
L4	2.70		3.10	0.106		0.122
V2	0°		8°	0°		8°

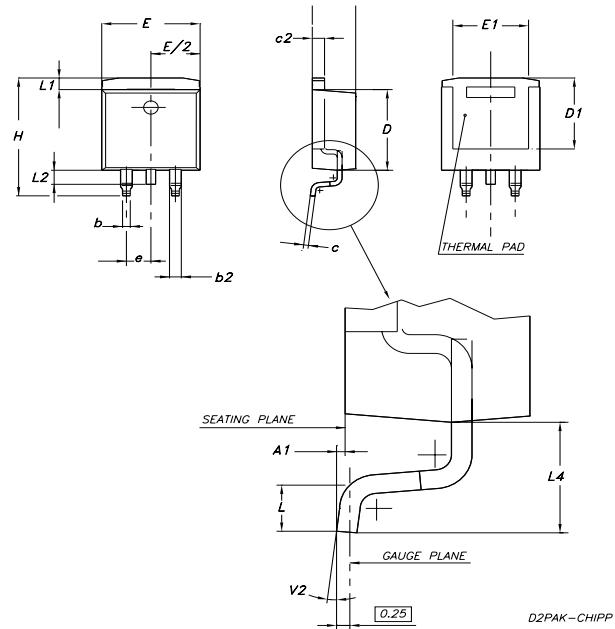

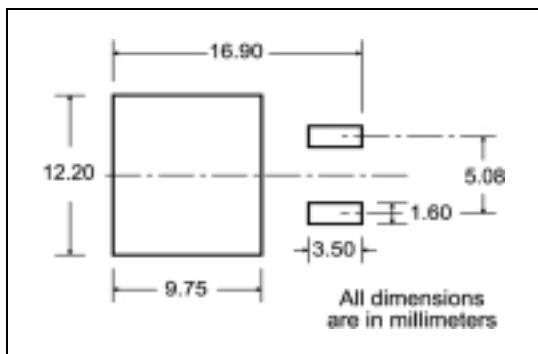**D<sup>2</sup>PAK FOOTPRINT****TAPE AND REEL SHIPMENT**

**TAPE MECHANICAL DATA**

DIM.	mm		inch	
	MIN.	MAX.	MIN.	MAX.
A0	10.5	10.7	0.413	0.421
B0	15.7	15.9	0.618	0.626
D	1.5	1.6	0.059	0.063
D1	1.59	1.61	0.062	0.063
E	1.65	1.85	0.065	0.073
F	11.4	11.6	0.449	0.456
K0	4.8	5.0	0.189	0.197
P0	3.9	4.1	0.153	0.161
P1	11.9	12.1	0.468	0.476
P2	1.9	2.1	0.075	0.082
R	50		1.574	
T	0.25	0.35	0.0098	0.0137
W	23.7	24.3	0.933	0.956

**REEL MECHANICAL DATA**

DIM.	mm		inch	
	MIN.	MAX.	MIN.	MAX.
A		330		12.992
B	1.5		0.059	
C	12.8	13.2	0.504	0.520
D	20.2		0.795	
G	24.4	26.4	0.960	1.039
N	100		3.937	
T		30.4		1.197

BASE QTY		BULK QTY	
1000		1000	

10 pitches cumulative tolerance on tape + / - 0.2 mm

Center line of cavity

User direction of feed

FEED DIRECTION

Bending radius R min.

\* on sales type

**Table 11: Revision History** 9

Date	Revision	Description of Changes
07-Jun-2004	4	Stylesheet update. No content change
19-Aug-2004	5	Complete Version
17-Sep-2004	6	Figure 18 has been added
09-Nov-2004	7	Final datasheet
19-Jan-2005	8	Datasheet updated
09-Jun-2005	9	Modified title

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

All other names are the property of their respective owners

© 2005 STMicroelectronics - All Rights Reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -  
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America