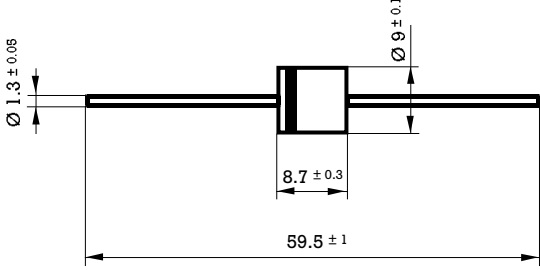



## 6 Amp. Glass Passivated Junction Rectifier

<p>Dimensions in mm.</p>  <p>P-6 (Plastic)</p> <p><b>Mounting instructions</b></p> <ol style="list-style-type: none"> <li>1. Min. distance from body to soldering point, 4 mm.</li> <li>2. Max. solder temperature, 350 °C.</li> <li>3. Max. soldering time, 3.5 sec.</li> <li>4. Do not bend lead at a point closer than 4 mm. to the body.</li> </ol>	<p>Voltage 50 to 1000 V.</p> <p>Current 6.0 A. at 60 °C.</p> 
	<ul style="list-style-type: none"> <li>• Glass passivated junction</li> <li>• High surge capability</li> <li>• High current capability</li> <li>• The plastic material carries U/L recognition 94 V-0</li> <li>• Terminals: Axial Leads</li> <li>• Polarity: Color band denotes cathode</li> </ul>

### Maximum Ratings, according to IEC publication No. 134


		P600A	P600B	P600D	P600G	P600J	P600K	P600M
$V_{RRM}$	Peak recurrent reverse voltage (V)	50	100	200	400	600	800	1000
$I_{F(AV)}$	Forward current at $T_{amb} = 60\text{ °C}$	6 A						
$I_{FRM}$	Recurrent peak forward current	70 A						
$I_{FSM}$	8.3 ms. peak forward surge current (Jedec Method)	400 A						
$T_j$	Operating temperature range	- 65 to + 175 °C						
$T_{stg}$	Storage temperature range	- 65 to + 175 °C						
$E_{RSM}$	Maximum non repetitive peak reverse avalanche energy. $I_R = 1\text{ A}$ ; $T_j = 25\text{ °C}$	20 mJ						

### Electrical Characteristics at $T_{amb} = 25\text{ °C}$


$V_F$	Max. forward voltage drop at $I_F = 6\text{ A}$	1.1 V
$I_R$	Max. reverse current at $V_{RRM}$ at 25 °C at 100 °C	5 $\mu\text{ A}$ 100 $\mu\text{ A}$
$R_{thj-a}$	Max. thermal resistance ( $l = 10\text{ mm.}$ )	10 °C/W

# Rating and Characteristic Curves

TYPICAL FORWARD CHARACTERISTIC

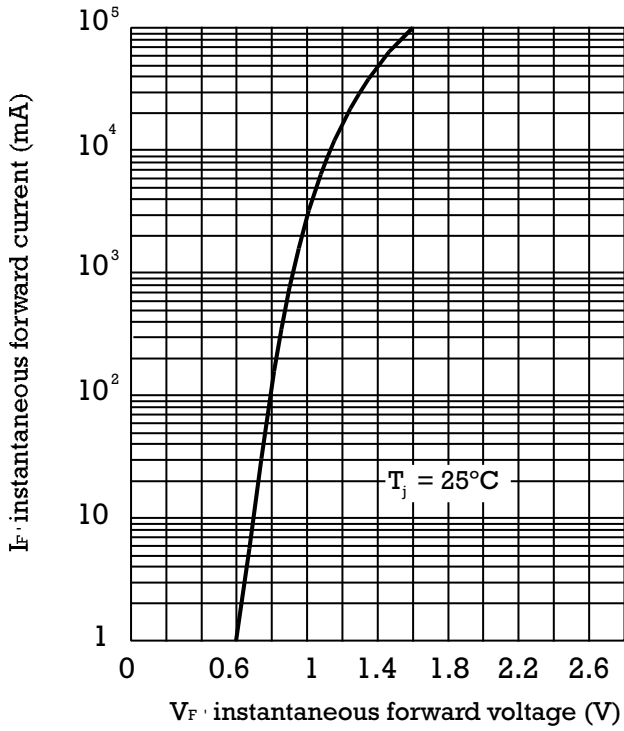

FORWARD CURRENT DERATING CURVE

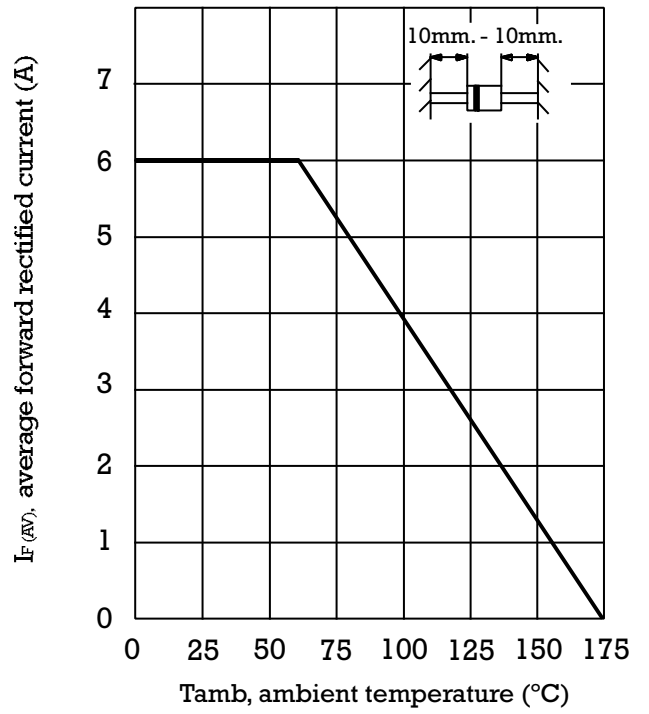

MAXIMUM NON REPETITIVE PEAK FORWARD SURGE CURRENT

