


MA1050

OUTLINE DIMENSIONS

Case : MA7

Unit : mm

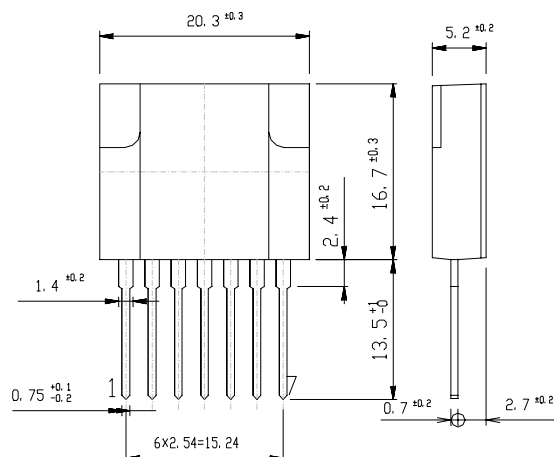

RATINGS

●Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings		Unit
			P Class	N Class	
Storage Temperature	T _{stg}		-30~125	-30~125	°C
Operating Temperature	T _{op}	Case Temperature	-20~125	-20~125	°C
Junction Temperature	T _j		150	150	°C
Peak Input Voltage	V _{in}	②+,④-,Fig.1 is Measurement Circuit of Peak Input Voltage V _{in} and Collector Cutoff Current I _{CEx} .	850	850	V
Input Current	I _{in}	Pulse Pulse Width 150 μs MAX, Duty1/2, Sawtooth Wave, Peak Value, ②+,④-	6	6	A
Maximum Operating Frequency	f(max)		200	200	kHz
Maximum Power Dissipation	P _D	Ta=25°C	3	3	W
	P _D	Heatsink Tc=100°C	20	20	W
Dielectric Strength	V _{dis}	Terminals To Case AC 1 min	2	2	kV
Insulation Resistance		Terminals To Case 500VDC	100	100	MΩ
Fold Back Control Voltage	V _{CONT(max)}	Fold Control Resistance=0Ω Duty 1/2, ④,⑦	±8	±8	V
Fold Back Control Current	I _{CONT(max)}	④-,⑥+	100	100	mA

●Electrical Characteristics (T_c=25°C)

Item		Symbol	Conditions	Ratings		Unit
				P Class	N Class	
Q1	Collector Cutoff Current	I_{CEX}	$V_{CE}=850V$, Fig.1 is Measurement Circuit of Peak Input Voltage V_{in} and Collector Cutoff Current I_{CEX} , ②+, ④-	MAX 0.1	MAX 0.1	mA
	DC Current Gain	h_{FE}	$V_{CE}=5V$, $I_C=1.5A$, ②+, ④-, ⑤ I_B	13~26	8~16	
	Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=1.5A$, $I_B=0.3A$, ②+, ④-, ⑤ I_B	MAX 1.0	MAX 1.0	V
	Thermal Resistance	θ_{jc}	Junction to Case	MAX 2.5	MAX 2.5	°C/W
D1	Reverse Current	I_R	$V_R=800V$, ①+, ②-	MAX 10	MAX 10	μA
	Forward Voltage	V_F	$I_F=0.6A$, ①-, ②+	MAX 1.7	MAX 1.7	V
Driving Saturation Voltage		$V_D(sat)$	$I_C=1.5A$, $I_B=0.3A$, ⑤+, ④-	MIN 1.7	MIN 1.7	V
				MAX 2.3	MAX 2.3	

●Standard Operating Condition・Design Standard For Application Circuit

Item	Conditions	Ratings		Unit
		P Class	N Class	
Input Rated Voltage		AC90~274	AC90~274	V
Output Nominal Wattage		24	24	W
Output Nominal Voltage		12	12	V
Output Nominal Current		2	2	A

●Standard Operating Condition・Standard Operating Characteristics (Ta=25°C)

Item		Conditions	Ratings		Unit	
			P Class	N Class		
Minimum Input Full Load Output Voltage		Vin=90V, IO=2A	12.0±0.6	12.0±0.6	V	Fig 2, ① Refer
Maximum Input Light Load Output Voltage		Vin=274V, IO=0.2A	12.0±0.6	12.0±0.6	V	Fig 2, ② Refer
AC Input Voltage		IO=2A	MAX 85	MAX 85	V	
Over Current Protection	Foldback Current	Vin=274V, VO=10V	MAX 3.5	MAX 3.5	A	Fig 2, ③ Refer
	Short Circuit	Vin=274V, RO=0.5Ω	Nodamage To Any Device, Automatic Recovery.		-	Fig 2, ④ Refer
Output Ripple Noise		Vin=90~274V, IO=0.2~2A	MAX 150	MAX 150	mV P-P	

Figure in ○=Terminal Sign




Fig1. Measurement Circuit






Fig2. Output Voltage/Current

MA1050 Transient Thermal Impedance

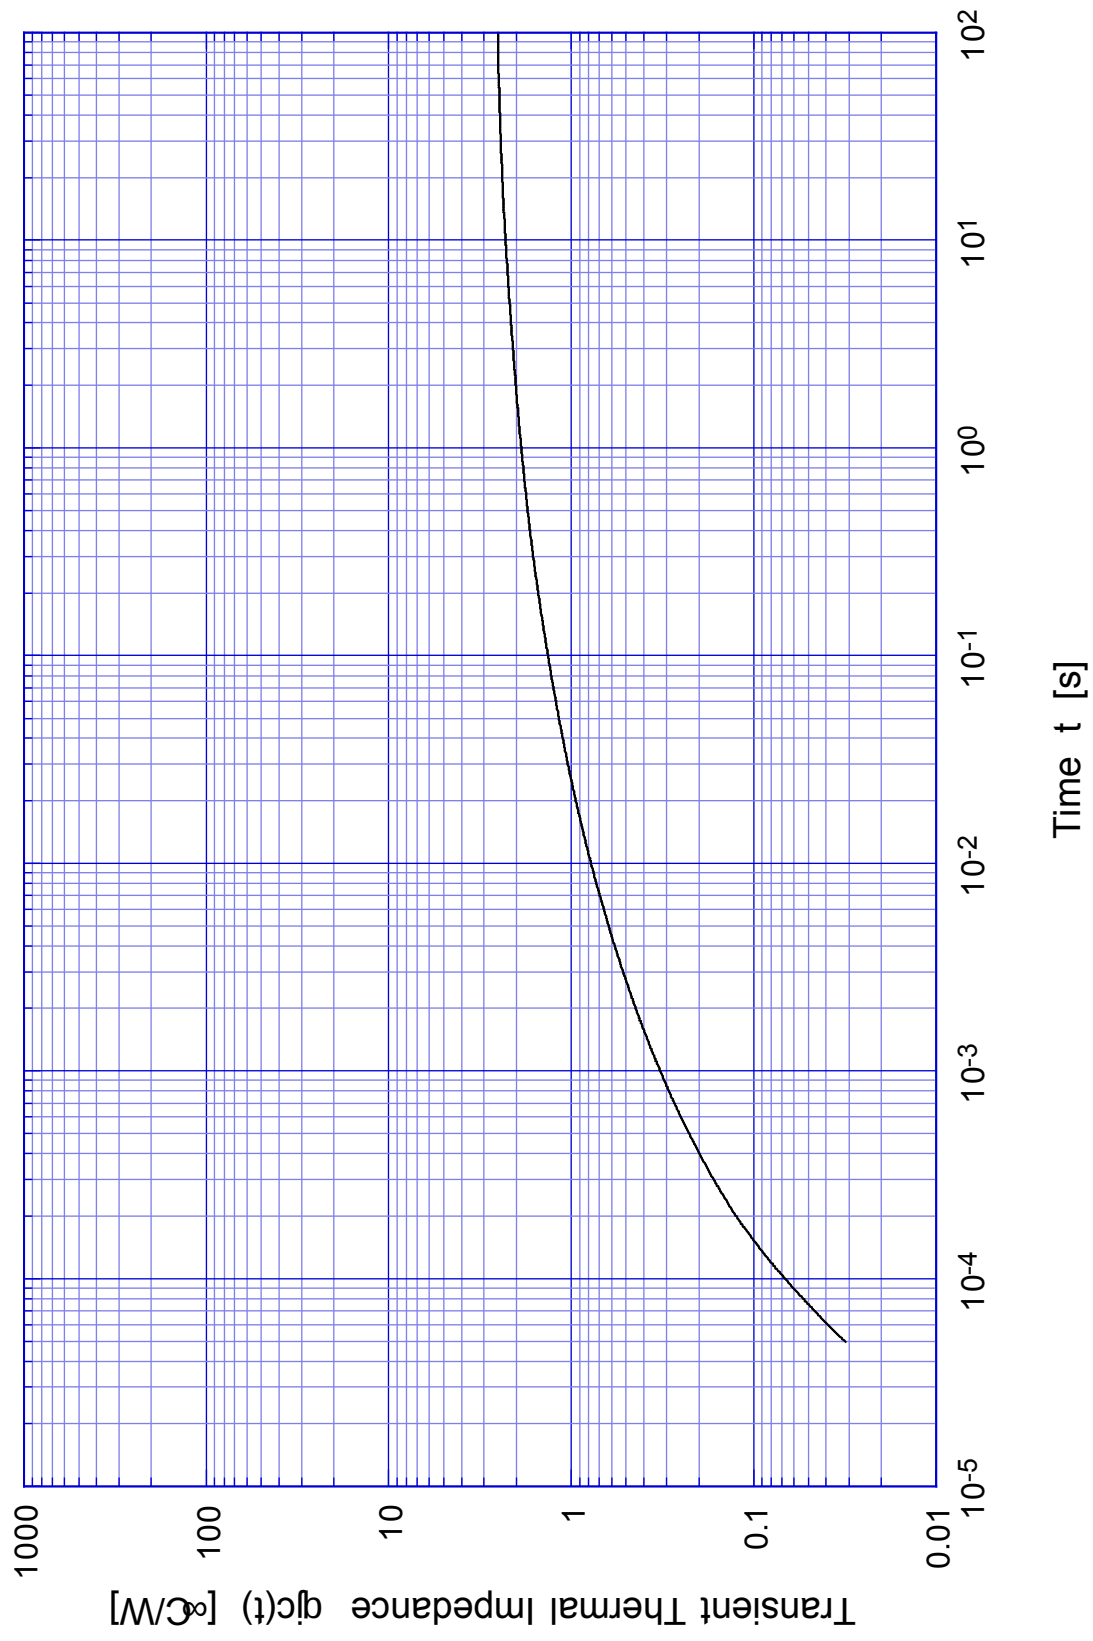


MA1050

Forward Bias SOA

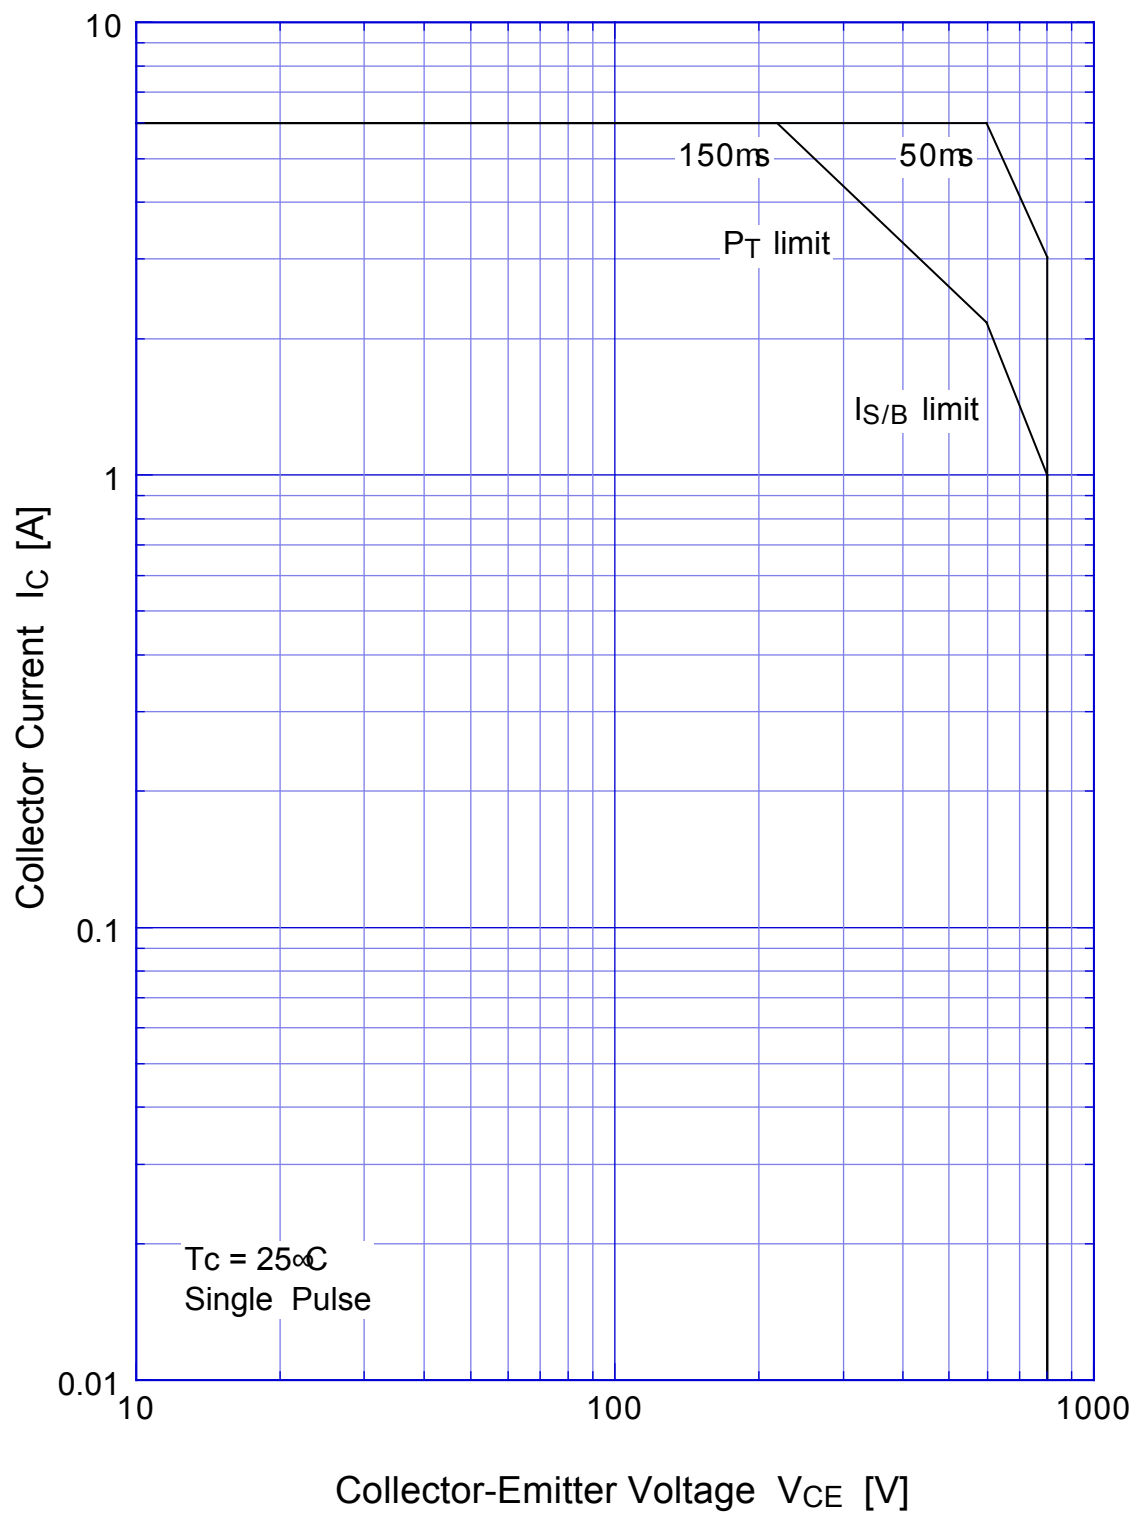


MA1050

Collector Current Derating

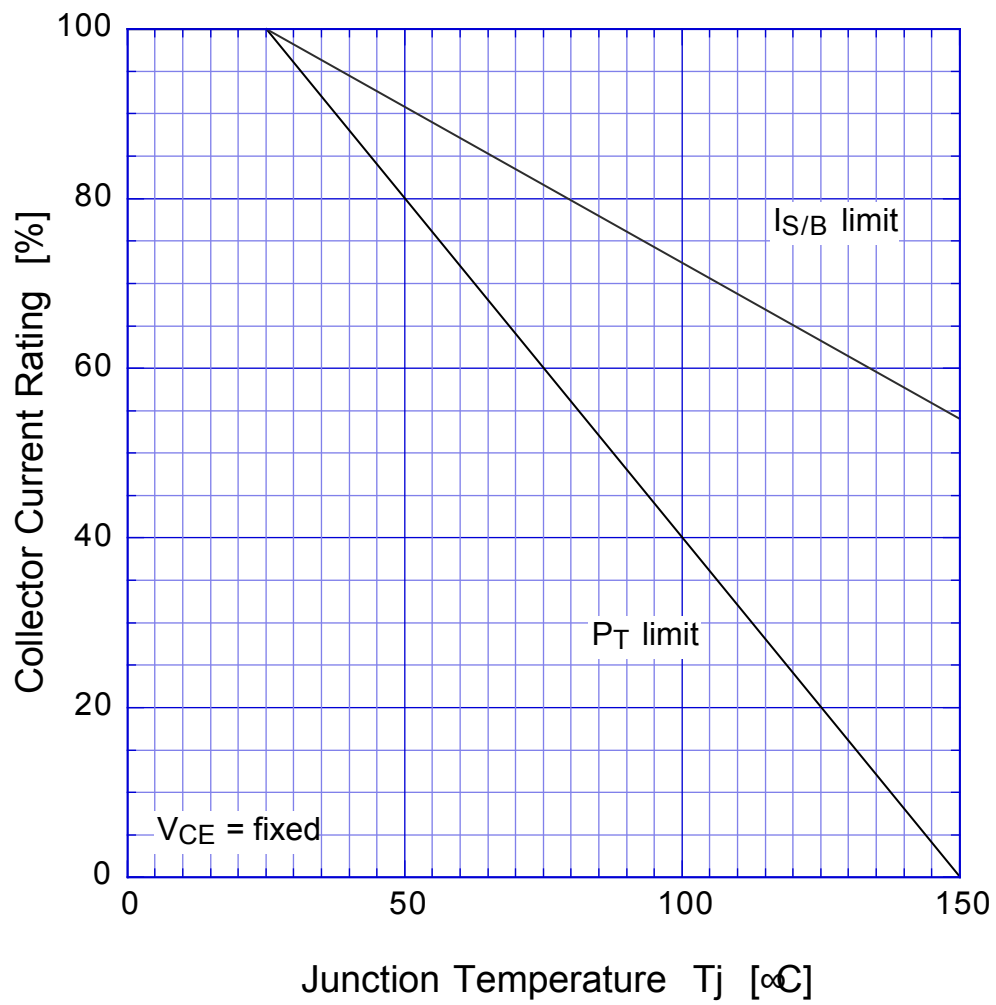

MA1050

Reverse Bias SOA

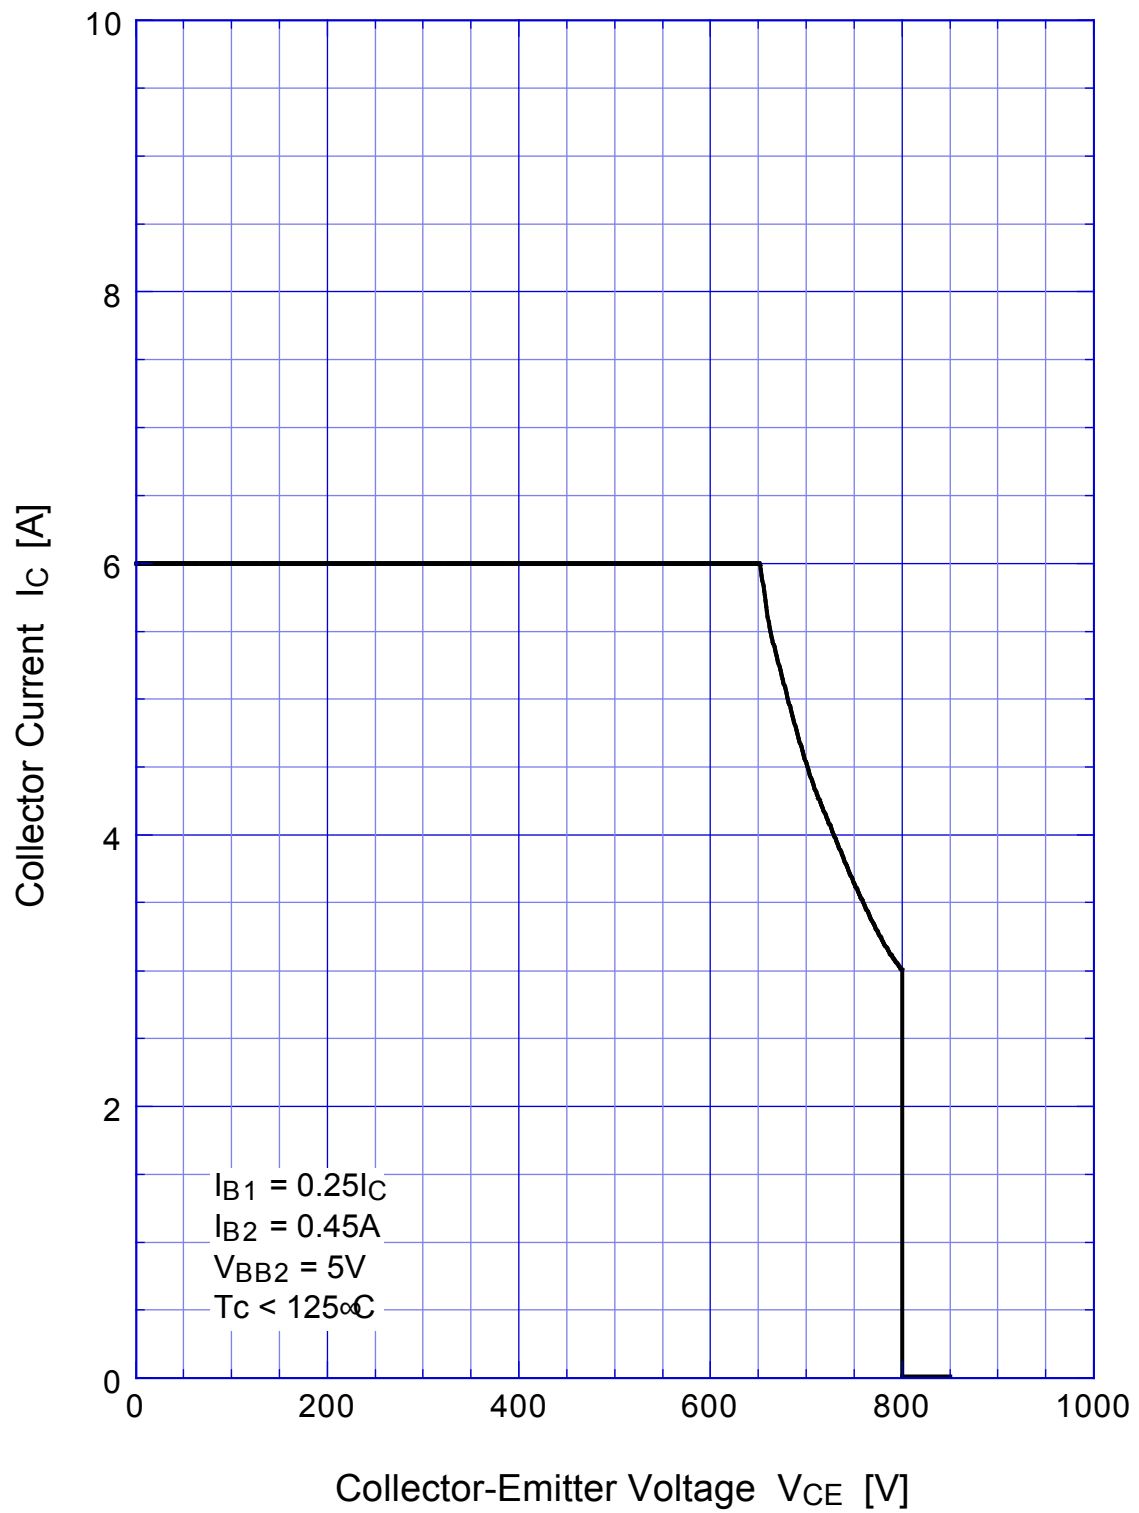

MA1050

$h_{FE} - I_C$

