

MITSUBISHI DIODE MODULES

# RM50TC-M,-H,-24,-2H

MEDIUM POWER GENERAL USE  
INSULATED TYPE

RM50TC-M,-H,-24,-2H



- **Io** DC output current ..... **100A**
- **V<sub>RRM</sub>** Repetitive peak reverse voltage ..... **400/800/1200/1600V**
- **3 phase bridge**
- **Insulated Type**
- **UL Recognized**

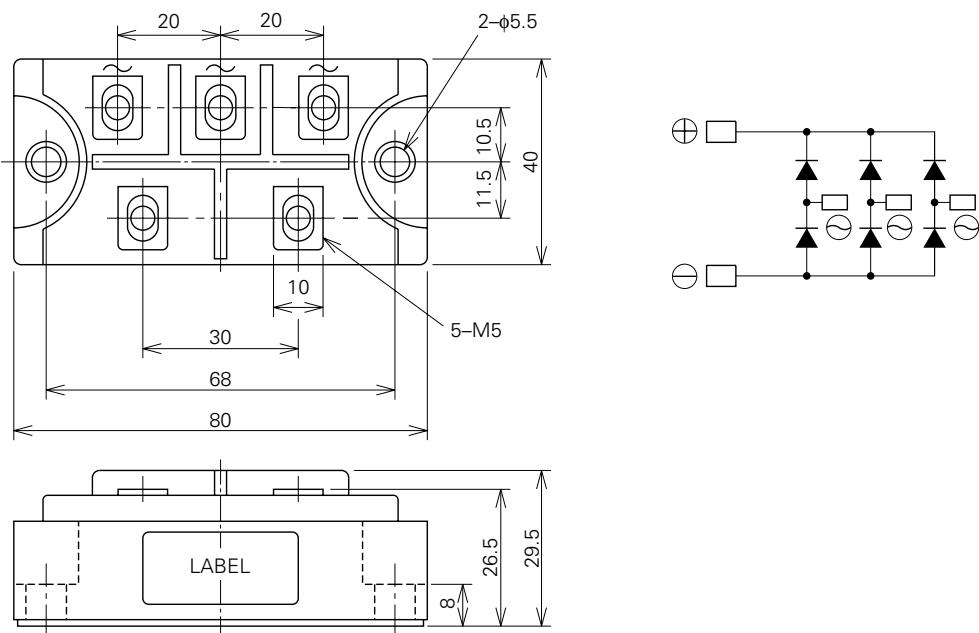
Yellow Card No. E80276 (N)  
File No. E80271

## APPLICATION

AC motor controllers , DC motor controllers, Battery DC power supplies,  
DC power supplies for control panels, and other general DC power equipment

## OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm



Feb.1999

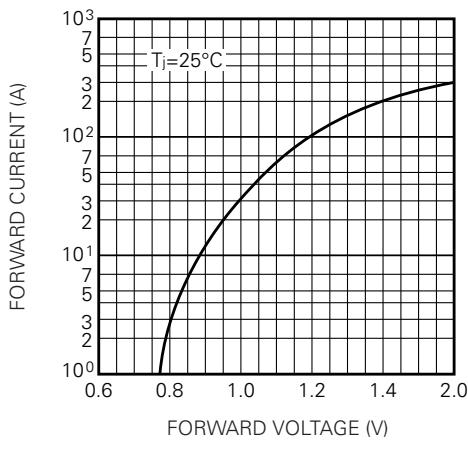
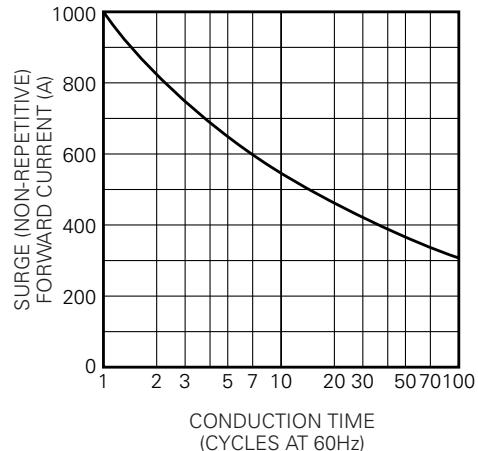
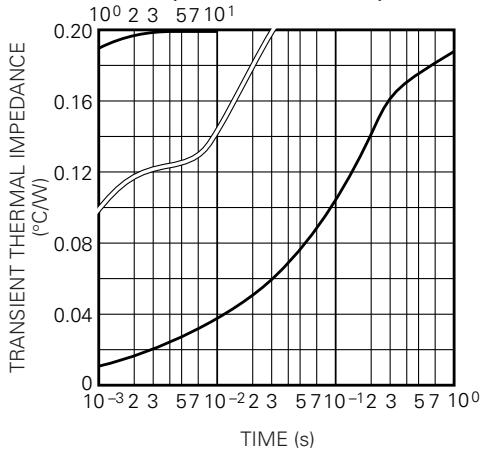
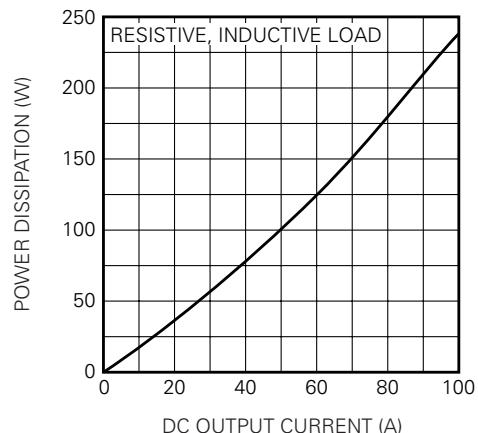
**ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Voltage class				Unit
		M	H	24	2H	
V <sub>RRM</sub>	Repetitive peak reverse voltage	400	800	1200	1600	V
V <sub>RSM</sub>	Non-repetitive peak reverse voltage	480	960	1350	1700	V
E <sub>a</sub>	Recommended AC input voltage	110	220	370	440	V

Symbol	Parameter	Conditions	Ratings	Unit
I <sub>o</sub>	DC output current	Three-phase full wave rectifying circuit, T <sub>c</sub> =102°C	100	A
I <sub>FSM</sub>	Surge (non-repetitive) forward current	One half cycle at 60Hz, peak value	1000	A
I <sup>2</sup> t	I <sup>2</sup> t for fusing	Value for one cycle of surge current	4.2 × 10 <sup>3</sup>	A <sup>2</sup> s
f	Maximum operating frequency		1000	Hz
T <sub>j</sub>	Junction temperature		-40~+150	°C
T <sub>stg</sub>	Storage temperature		-40~+125	°C
V <sub>iso</sub>	Isolation voltage	Charged part to case	2500	V
—	Mounting torque	Main terminal screw M5	1.47~1.96	N·m
			15~20	kg·cm
		Mounting screw M5	1.47~1.96	N·m
			15~20	kg·cm
—	Weight	Typical value	220	g

**ELECTRICAL CHARACTERISTICS**

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
I <sub>RRM</sub>	Repetitive reverse current	T <sub>j</sub> =150°C, V <sub>RRM</sub> applied	—	—	10	mA
V <sub>FM</sub>	Forward voltage	T <sub>j</sub> =25°C, I <sub>FM</sub> =100A, instantaneous meas.	—	—	1.2	V
R <sub>th</sub> (j-o)	Thermal resistance	Junction to case	—	—	0.2	°C/W
R <sub>th</sub> (c-f)	Contact thermal resistance	Case to fin, conductive grease applied	—	—	0.06	°C/W
—	Insulation resistance	Measured with a 500V megohmmeter between main terminal and case	10	—	—	MΩ

**PERFORMANCE CURVE****MAXIMUM FORWARD CHARACTERISTIC****ALLOWABLE SURGE (NON-REPETITIVE)  
FORWARD CURRENT****MAXIMUM TRANSIENT THERMAL IMPEDANCE  
(JUNCTION TO CASE)****MAXIMUM POWER DISSIPATION****ALLOWABLE CASE TEMPERATURE  
VS. DC OUTPUT CURRENT**