

SELF-RETAINING PVC SCREW SPACERS

- Simple Pre-Assembly Convenience Saves Handling
- Firm Retention Assured
- 5 Standard Sizes in Lengths from .050" - 1.250" (.76 - 31.8) in .005" (.127) Increments

Ribbed inner-wall design assures a snug fit onto #4, #6 and #8 screws, or M3 and M4 metric screws enabling the spacers to remain pre-assembled during handling and assembly. The SRS Series provides a dependable solution for otherwise awkward assembly steps and lost assembly time.

Material Specifications:

Gray Rigid PVC material, UL Rated 94V-0

Oxygen Rating Index: Over 45%

Standard Drawing Tolerances:

(unless otherwise indicated)

O.D. $\pm .005$ (.13)

I.D. $\pm .005$ (.13)

"H" Dim: 1/16-1/2 (1.6-12.7) is $\pm .005$ (.13)

"H" Dim: 9/16-1.0 (14.3-25.4) is $\pm .010$ (.25)

Ordering Information:

SRS X XXX


Length Expressed in Inches
(Must be even multiples of .005")
or whole millimeters (example: 2mm)
0.050 = 050 0.750 = 750
0.100 = 100 1.250 = 1.250

Series



SRS Series		Color: Gray		
Part No.	Screw Size	Minor I.D.	I.D.	"H" DIM.
SRS-1	4	.107 (2.7)	.142 (3.6)	.050-1.250 (1.3-31.8)
SRS-2	6 (M3.5)	.131 (3.3)	.174 (4.4)	.050-1.250 (1.3-31.8)
SRS-3	8	.155 (3.9)	.177 (4.5)	.050-1.250 (1.3-31.8)
SRS-4	M3	.113 (2.9)	.144 (3.7)	.050-1.250 (1.3-31.8)
SRS-5	M4	.149 (3.9)	.185 (4.7)	.050-1.250 (1.3-31.8)

"H" Dimension	Price Code SRS-1 thru SRS-5
.050-.075 (1.3-1.9)	W
.080-.150 (2.0-3.8)	X
.155-.230 (4.0-5.8)	X
.235-.310 (6.0-7.9)	Y
.315-.380 (8.0-9.7)	Z
.385-.495 (9.8-12.6)	ZZ
.500-.750 (12.7-19.1)	ZZZ
.755-1.250 (19.2-31.8)	ZZZZ

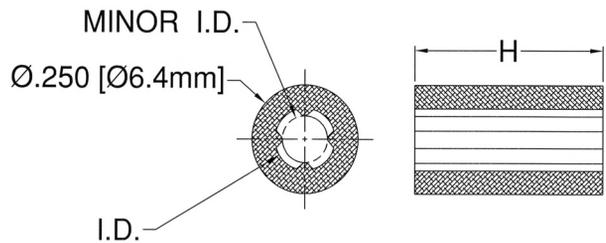

Examples:
SRS-1-240 is price code Y
SRS-5-410 is price code ZZ
SRS-3-900 is price code ZZZZ