

# ZXTP25040DFH

## 40V SOT23 PNP medium power transistor

### Summary

$BV_{CEO} > -40V$

$BV_{ECO} > -3V$  ;

$I_{C(Cont)} = -3A$

$R_{CE(sat)} = 55\ m\Omega$  ;



$V_{CE(sat)} < -85mV\ @\ 1A$  ;

$P_D = 1.25W$

Complementary part number ZXTN25040DFH

### Description

Advanced process capability and package design have been used to maximize the power handling and performance of this small outline transistor. The compact size and ratings of this device make it ideally suited to applications where space is at a premium.




### Features

- High power dissipation SOT23 package
- High peak current
- Low saturation voltage
- 7V reverse blocking voltage

### Applications

- MOSFET and IGBT gate driving
- DC - DC converters
- Motor drive
- High side driver



Pinout - top view

### Ordering information

| Device         | Reel size (inches) | Tape width | Quantity per reel |
|----------------|--------------------|------------|-------------------|
| ZXTP25040DFHTA | 7                  | 8mm        | 3000              |

### Device marking

024

# ZXTP25040DFH

## Absolute maximum ratings

| Parameter                                                                              | Symbol         | Limit        | Unit       |
|----------------------------------------------------------------------------------------|----------------|--------------|------------|
| Collector-base voltage                                                                 | $V_{CBO}$      | -45          | V          |
| Collector-emitter voltage (forward blocking)                                           | $V_{CEO}$      | -40          | V          |
| Emitter-collector voltage (reverse blocking)                                           | $V_{ECO}$      | -3           | V          |
| Emitter-base voltage                                                                   | $V_{EBO}$      | -7           | V          |
| Continuous collector current <sup>(b)</sup>                                            | $I_C$          | -3           | A          |
| Peak pulse current                                                                     | $I_{CM}$       | -9           | A          |
| Power dissipation at $T_A = 25^\circ\text{C}$ <sup>(a)</sup><br>linear derating factor | $P_D$          | 0.73<br>5.84 | W<br>mW/°C |
| Power dissipation at $T_A = 25^\circ\text{C}$ <sup>(b)</sup><br>linear derating factor | $P_D$          | 1.05<br>8.4  | W<br>mW/°C |
| Power dissipation at $T_A = 25^\circ\text{C}$ <sup>(c)</sup><br>linear derating factor | $P_D$          | 1.25<br>9.6  | W<br>mW/°C |
| Power dissipation at $T_A = 25^\circ\text{C}$ <sup>(d)</sup><br>linear derating factor | $P_D$          | 1.81<br>14.5 | W<br>mW/°C |
| Operating and storage temperature range                                                | $T_j, T_{stg}$ | -55 to 150   | °C         |

## Thermal resistance

| Parameter                          | Symbol          | Limit | Unit |
|------------------------------------|-----------------|-------|------|
| Junction to ambient <sup>(a)</sup> | $R_{\theta JA}$ | 171   | °C/W |
| Junction to ambient <sup>(b)</sup> | $R_{\theta JA}$ | 119   | °C/W |
| Junction to ambient <sup>(c)</sup> | $R_{\theta JA}$ | 100   | °C/W |
| Junction to ambient <sup>(d)</sup> | $R_{\theta JA}$ | 69    | °C/W |

### NOTES:

(a) For a device surface mounted on 15mm x 15mm x 1.6mm FR4 PCB with high coverage of single sided 1oz copper, in still air conditions.





(b) Mounted on 25mm x 25mm x 1.6mm FR4 PCB with a high coverage of single sided 2 oz copper in still air conditions.

(c) Mounted on 50mm x 50mm x 1.6mm FR4 PCB with a high coverage of single sided 2 oz copper in still air conditions.

(d) As (c) above measured at  $t < 5\text{sec}$ .

# ZXTP25040DFH

## Characteristics

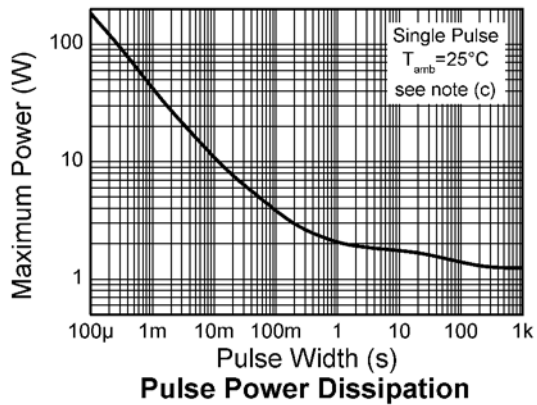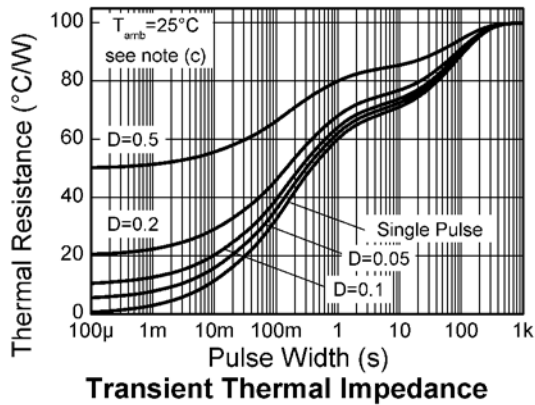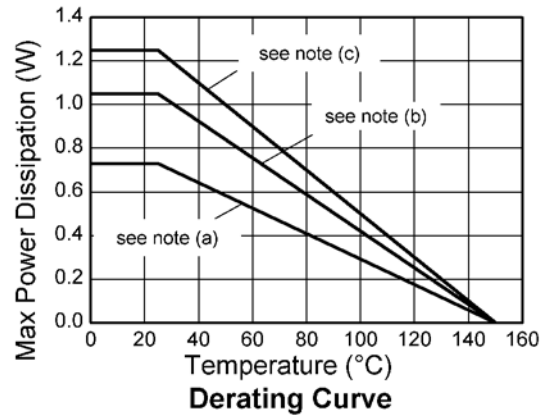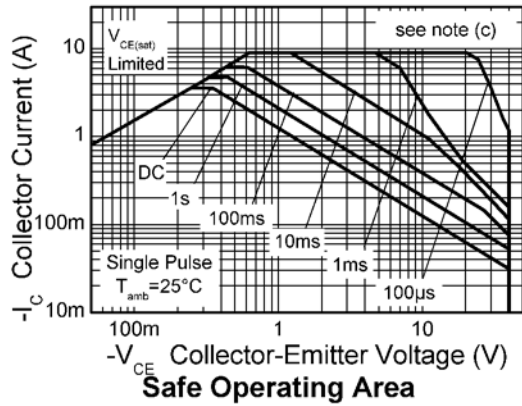

# ZXTP25040DFH






## Electrical characteristics (at $T_{AMB} = 25^{\circ}\text{C}$ unless otherwise stated)

| Parameter                                              | Symbol        | Min. | Typ. | Max.       | Unit                | Conditions                                                                             |
|--------------------------------------------------------|---------------|------|------|------------|---------------------|----------------------------------------------------------------------------------------|
| Collector-base breakdown voltage                       | $BV_{CBO}$    | -45  | -75  |            | V                   | $I_C = -100\mu\text{A}$                                                                |
| Collector-emitter breakdown voltage (base open)        | $BV_{CEO}$    | -40  | -65  |            | V                   | $I_C = -10\text{mA}$ (*)                                                               |
| Emitter-collector breakdown voltage (reverse blocking) | $BV_{ECO}$    | -3   | -8.7 |            | V                   | $I_E = -100\mu\text{A}$ (*)                                                            |
| Emitter-base breakdown voltage                         | $BV_{EBO}$    | -7   | -8.2 |            | V                   | $I_E = -100\mu\text{A}$                                                                |
| Collector cut-off current                              | $I_{CBO}$     |      | <-1  | -50<br>-20 | nA<br>$\mu\text{A}$ | $V_{CB} = -36\text{V}$<br>$V_{CB} = -36\text{V}$ , $T_{amb} = 100^{\circ}\text{C}$     |
| Emitter cut-off current                                | $I_{EBO}$     |      | <-1  | -50        | nA                  | $V_{EB} = -5.6\text{V}$                                                                |
| Collector-emitter saturation voltage                   | $V_{CE(sat)}$ |      | -170 | -260       | mV                  | $I_C = -1\text{A}$ , $I_B = -20\text{mA}$ (*)                                          |
|                                                        |               |      | -65  | -85        | mV                  | $I_C = -1\text{A}$ , $I_B = -100\text{mA}$ (*)                                         |
|                                                        |               |      | -165 | -220       | mV                  | $I_C = -3\text{A}$ , $I_B = -300\text{mA}$ (*)                                         |
| Base-emitter saturation voltage                        | $V_{BE(sat)}$ |      | -930 | -1000      | mV                  | $I_C = -3\text{A}$ , $I_B = -300\text{mA}$ (*)                                         |
| Base-emitter turn-on voltage                           | $V_{BE(on)}$  |      | -830 | -900       | mV                  | $I_C = -3\text{A}$ , $V_{CE} = -2\text{V}$ (*)                                         |
| Static forward current transfer ratio                  | $h_{FE}$      | 300  | 450  | 900        |                     | $I_C = -10\text{mA}$ , $V_{CE} = -2\text{V}$ (*)                                       |
|                                                        |               | 200  | 300  |            |                     | $I_C = -1\text{A}$ , $V_{CE} = -2\text{V}$ (*)                                         |
|                                                        |               | 30   | 60   |            |                     | $I_C = -3\text{A}$ , $V_{CE} = -2\text{V}$ (*)                                         |
| Transition frequency                                   | $f_T$         |      | 270  |            | MHz                 | $I_C = -50\text{mA}$ , $V_{CE} = -10\text{V}$<br>$f = 100\text{MHz}$                   |
| Output capacitance                                     | $C_{OBO}$     |      | 17.4 |            | pF                  | $V_{CB} = -10\text{V}$ , $f = 1\text{MHz}$ (*)                                         |
| Turn-on time                                           | $t_{(on)}$    |      | 75.5 |            | ns                  | $V_{CC} = -15\text{V}$ . $I_C = -750\text{mA}$ ,<br>$I_{B1} = I_{B2} = -15\text{mA}$ . |
| Turn-off time                                          | $t_{(off)}$   |      | 320  |            | ns                  |                                                                                        |

### NOTES:


(\*) Measured under pulsed conditions. Pulse width  $\leq 300\mu\text{s}$ ; duty cycle  $\leq 2\%$ .

## Typical characteristics

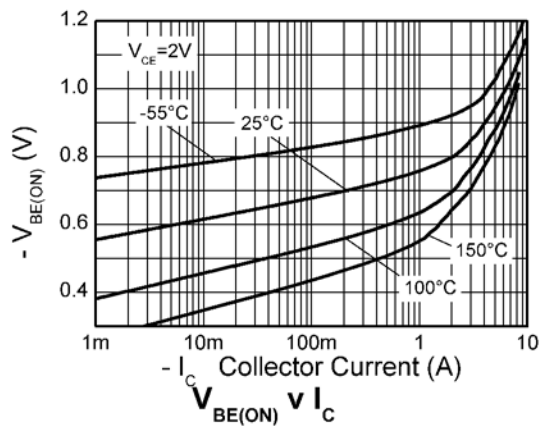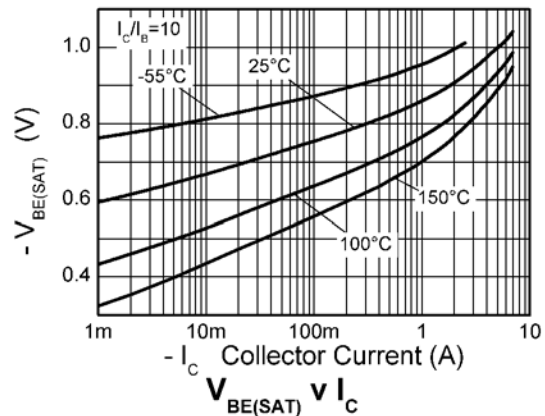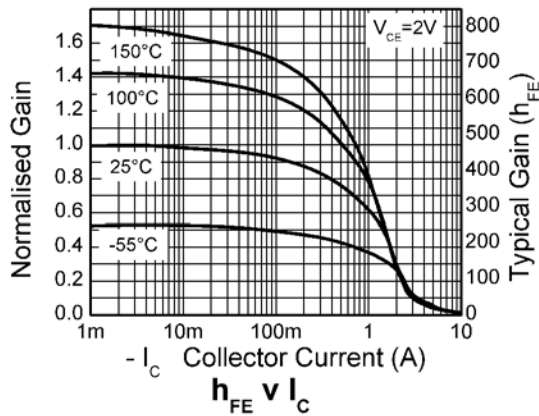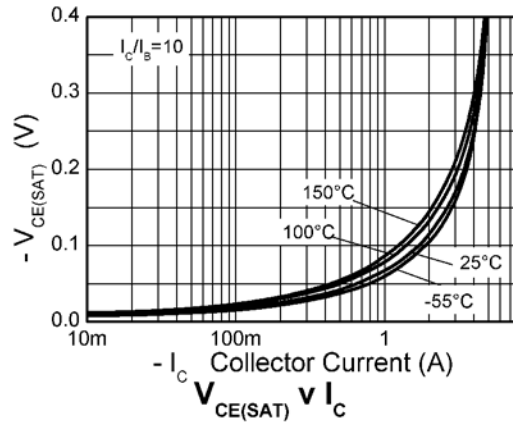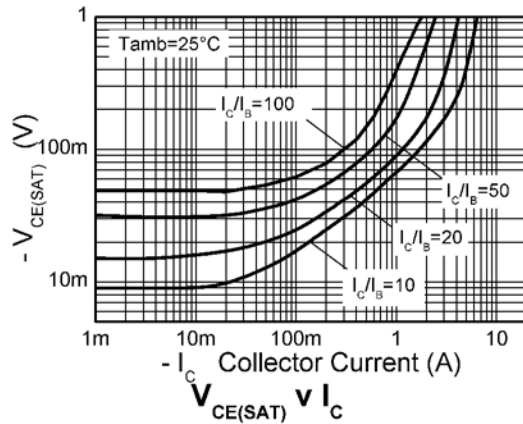

# ZXTP25040DFH

## Package outline - SOT23

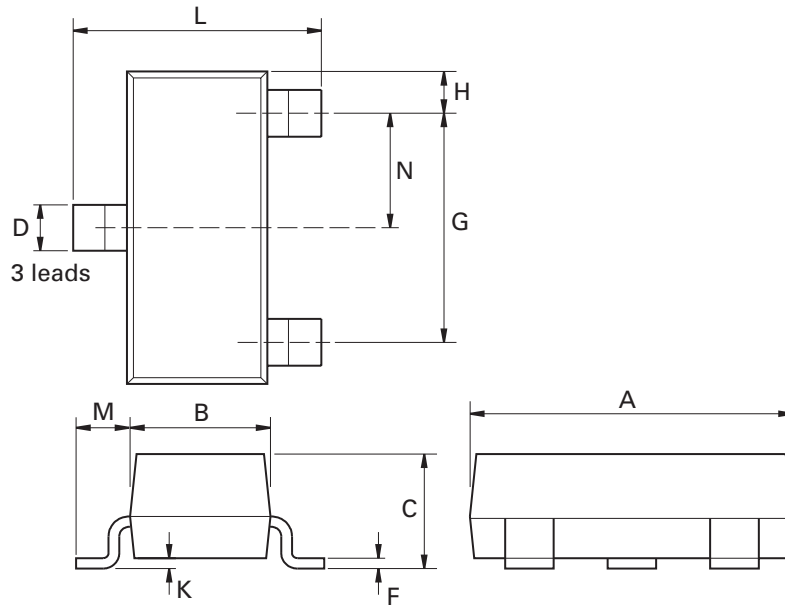

| Dim. | Millimeters |      | Inches    |        | Dim. | Millimeters |      | Inches     |        |
|------|-------------|------|-----------|--------|------|-------------|------|------------|--------|
|      | Min.        | Max. | Min.      | Max.   |      | Min.        | Max. | Max.       | Max.   |
| A    | 2.67        | 3.05 | 0.105     | 0.120  | H    | 0.33        | 0.51 | 0.013      | 0.020  |
| B    | 1.20        | 1.40 | 0.047     | 0.055  | K    | 0.01        | 0.10 | 0.0004     | 0.004  |
| C    | -           | 1.10 | -         | 0.043  | L    | 2.10        | 2.50 | 0.083      | 0.0985 |
| D    | 0.37        | 0.53 | 0.015     | 0.021  | M    | 0.45        | 0.64 | 0.018      | 0.025  |
| F    | 0.085       | 0.15 | 0.0034    | 0.0059 | N    | 0.95 NOM    |      | 0.0375 NOM |        |
| G    | 1.90 NOM    |      | 0.075 NOM |        | -    | -           | -    | -          | -      |

**Note:** Controlling dimensions are in millimeters. Approximate dimensions are provided in inches

| Europe                                                                            | Americas                                                                    | Asia Pacific                                                                             | Corporate Headquarters                                                                             |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------|------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Zetex GmbH<br>Streitfeldstraße 19<br>D-81673 München<br>Germany                   | Zetex Inc<br>700 Veterans Memorial Highway<br>Hauppauge, NY 11788<br>USA    | Zetex (Asia Ltd)<br>3701-04 Metroplaza Tower 1<br>Hing Fong Road, Kwai Fong<br>Hong Kong | Zetex Semiconductors plc<br>Zetex Technology Park, Chadderton<br>Oldham, OL9 9LL<br>United Kingdom |
| Telefon: (49) 89 45 49 49 0<br>Fax: (49) 89 45 49 49 49<br>europe.sales@zetex.com | Telephone: (1) 631 360 2222<br>Fax: (1) 631 360 8222<br>usa.sales@zetex.com | Telephone: (852) 26100 611<br>Fax: (852) 24250 494<br>asia.sales@zetex.com               | Telephone: (44) 161 622 4444<br>Fax: (44) 161 622 4446<br>hq@zetex.com                             |

For international sales offices visit [www.zetex.com/offices](http://www.zetex.com/offices)

Zetex products are distributed worldwide. For details, see [www.zetex.com/salesnetwork](http://www.zetex.com/salesnetwork)

This publication is issued to provide outline information only which (unless agreed by the company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contact or be regarded as a representation relating to the products or services concerned. The company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.