




STS3DPFS30L

P - CHANNEL 30V - 0.13Ω - 3A SO-8 STripFET™ MOSFET PLUS SCHOTTKY RECTIFIER

PRELIMINARY DATA

MAIN PRODUCT CHARACTERISTICS			
MOSFET	V _{DSS}	R _{D(on)}	I _D
	30V	<0.16Ω	3A
SCHOTTKY	I _{F(AV)}	V _{RRM}	V _{F(MAX)}
	3A	30V	0.51V




SO-8

DESCRIPTION:

This product associates the latest low voltage StripFET™ in p-channel version to a low drop Schottky diode. Such configuration is extremely versatile in implementing a large variety of DC-DC converters for printers, portable equipment, and cellular phones.

INTERNAL SCHEMATIC DIAGRAM



MOSFET ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V _{DS}	Drain-source Voltage (V _{GS} = 0)	30	V
V _{DGR}	Drain-gate Voltage (R _{GS} = 20 kΩ)	30	V
V _{GS}	Gate-source Voltage	± 20	V
I _D	Drain Current (continuous) at T _c = 25 °C	3	A
I _D	Drain Current (continuous) at T _c = 100 °C	1.9	A
I _{DM(•)}	Drain Current (pulsed)	12	A
P _{tot}	Total Dissipation at T _c = 25 °C	2	W

SCHOTTKY ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V _{RRM}	Repetitive Peak Reverse Voltage	30	V
I _{F(RMS)}	RMS Forward Current	20	A
I _{F(AV)}	Average Forward Current	T _L =125 °C δ=0.5	A
I _{FSM}	Surge Non Repetitive Forward Current	tp= 10 ms Sinusoidal	A
I _{IRSM}	Non Repetitive Peak Reverse Current	tp=100 μs	A
dv/dt	Critical Rate Of Rise Of Reverse Voltage	10000	V/μs

(•) Pulse width limited by safe operating area

Note: For the P-CHANNEL MOSFET actual polarity of voltages and current has to be reversed

STS3DPFS30L

THERMAL DATA

R _{thj-amb}	(*) Thermal Resistance Junction-ambient MOSFET S.O. Dual Operating	78	°C/W
R _{thj-amb}	(*) Thermal Resistance Junction-ambient SCHOTTKY	62	°C/W
T _{stg}	Storage Temperature Range	100	°C/W
T _j	Junction Temperature	-65 to 150	°C

(*) mounted on FR-4 board (steady state)

MOSFET ELECTRICAL CHARACTERISTICS ($T_{case} = 25^\circ\text{C}$ unless otherwise specified)

OFF

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{(BR)DSS}	Drain-source Breakdown Voltage	I _D = 250 μA V _{GS} = 0	30			V
I _{DSS}	Zero Gate Voltage Drain Current (V _{GS} = 0)	V _{DS} = Max Rating V _{DS} = Max Rating T _c = 125 °C			1 10	μA μA
I _{GSS}	Gate-body Leakage Current (V _{DS} = 0)	V _{GS} = ± 16 V			± 1	μA

ON (*)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} I _D = 250 μA	1		2.5	V
R _{D(on)}	Static Drain-source On Resistance	V _{GS} = 10V I _D = 1.5 A V _{GS} = 4.5V I _D = 1.5 A		0.13 0.15	0.16 0.19	Ω Ω
I _{D(on)}	On State Drain Current	V _{DS} > I _{D(on)} × R _{D(on)max} V _{GS} = 10 V	3			A

DYNAMIC

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
g _{fs} (*)	Forward Transconductance	V _{DS} > I _{D(on)} × R _{D(on)max} I _D = 1.5 A		3.5		S
C _{iss} C _{oss} C _{rss}	Input Capacitance Output Capacitance Reverse Transfer Capacitance	V _{DS} = 25 V f = 1 MHz V _{GS} = 0		510 170 55		pF pF pF

ELECTRICAL CHARACTERISTICS (continued)

SWITCHING ON

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$ t_r	Turn-on Delay Time Rise Time	$V_{DD} = 15 \text{ V}$ $I_D = 1.5 \text{ A}$ $R_G = 4.7 \Omega$ $V_{GS} = 4.5 \text{ V}$ (Resistive Load, see fig. 3)		15 37		ns ns
Q_g Q_{gs} Q_{gd}	Total Gate Charge Gate-Source Charge Gate-Drain Charge	$V_{DD} = 15 \text{ V}$ $I_D = 3 \text{ A}$ $V_{GS} = 4.5 \text{ V}$		5.5 1.7 1.8	7.5	nC nC nC

SWITCHING OFF

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$t_{d(off)}$ t_r	Turn-off Delay Time Fall Time	$V_{DD} = 15 \text{ V}$ $I_D = 1.5 \text{ A}$ $R_G = 4.7 \Omega$ $V_{GS} = 4.5 \text{ V}$ (Resistive Load, see fig. 3)		15 29		ns ns

SOURCE DRAIN DIODE

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{SD} $I_{SDM(\bullet)}$	Source-drain Current Source-drain Current (pulsed)				3 12	A A
$V_{SD} (\ast)$	Forward On Voltage	$I_{SD} = 3 \text{ A}$ $V_{GS} = 0$			2	V
t_{rr} Q_{rr} I_{RRM}	Reverse Recovery Time Reverse Recovery Charge Reverse Recovery Current	$I_{SD} = 3 \text{ A}$ $di/dt = 100 \text{ A}/\mu\text{s}$ $V_{DD} = 15 \text{ V}$ $T_j = 150^\circ\text{C}$ (see test circuit, figure 5)		18 12 1.33		ns nC A

(*) Pulsed: Pulse duration = 300 μs , duty cycle 1.5 %

(\bullet) Pulse width limited by safe operating area


SCHOTTKY STATIC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_R(\ast)$	Reversed Leakage Current	$T_J = 25^\circ\text{C}$ $V_R = 30 \text{ V}$ $T_J = 125^\circ\text{C}$ $V_R = 30 \text{ V}$		0.03	0.2 100	mA mA
$V_F(\ast)$	Forward Voltage drop	$T_J = 25^\circ\text{C}$ $I_F = 3 \text{ A}$ $T_J = 125^\circ\text{C}$ $I_F = 3 \text{ A}$		0.38	0.51 0.46	V V

STS3DPFS30L

SO-8 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			1.75			0.068
a1	0.1		0.25	0.003		0.009
a2			1.65			0.064
a3	0.65		0.85	0.025		0.033
b	0.35		0.48	0.013		0.018
b1	0.19		0.25	0.007		0.010
C	0.25		0.5	0.010		0.019
c1		45 (typ.)				
D	4.8		5.0	0.188		0.196
E	5.8		6.2	0.228		0.244
e		1.27			0.050	
e3		3.81			0.150	
F	3.8		4.0	0.14		0.157
L	0.4		1.27	0.015		0.050
M			0.6			0.023
S		8 (max.)				

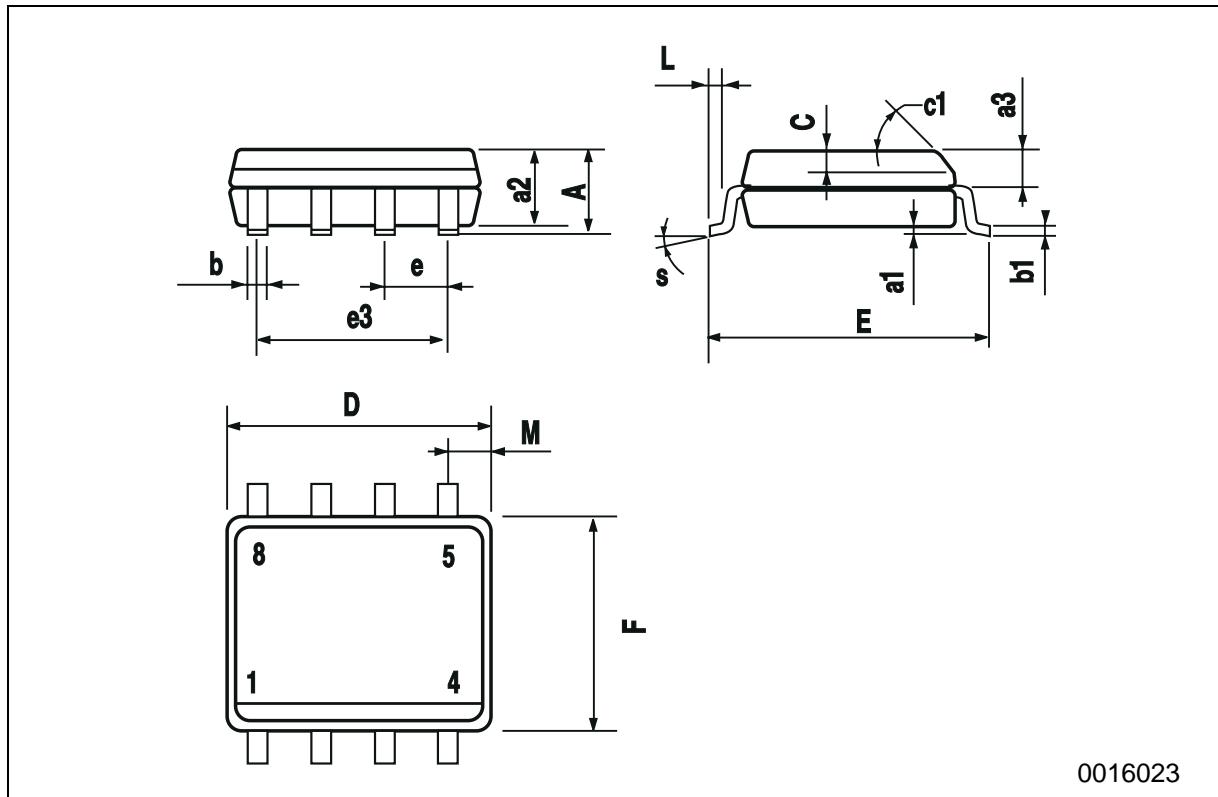

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 2000 STMicroelectronics – Printed in Italy – All Rights Reserved
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco -
Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>

