




AMGIS

CT Series • Current Sensor for 50/60 Hz

Part Number	CT 1200
Customer	
Product Type	Current transformer

SCHEMATIC:



ELECTRICAL SPECIFICATION:

— Rated input current	: 200Amps
— Primary to Secondary isolation	: 2500VAC
— Operating frequency	: 50 / 60Hz
— Turns ratio	: 1:1000
— DCR	: 11.00Ω
— $I_o @ V_{rms} = 22.2V$	: 2340μArms
— Ratio correction factor (RCF*)	: 1.002 @10% (Multiply current reading by this factor to compensate for transformer losses)
— Operating temperature range	: -55°C to 120°C
— Flammability rating	: UL 94V0

Volt/Amp at rated I_p for different loads			
100Ω	500Ω	2000Ω	5000Ω
0.10	0.31	0.41	0.45

LOAD TEST DETAILS:

Rated I_p =200A
 R_L =100Ω/4.00W
 U_s =20.0V


MARKING INFORMATION:

AMGIS
YY/WW CT1200

Trafo Weight:

0.150Kg/pc

MECHANICAL DIMENSIONS:

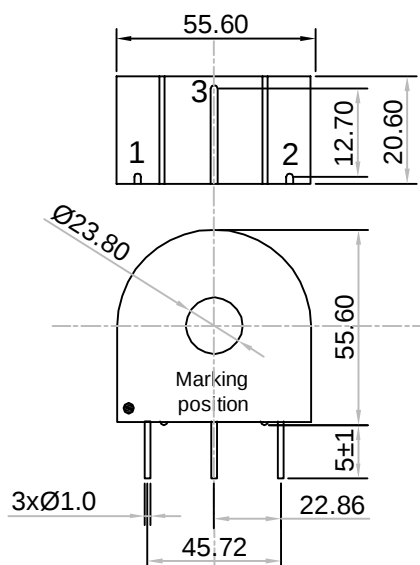

All dimensions are in mm
Linear dimensional tolerance $\pm 0.2\text{mm}$

AMGIS, LLC * 10830 Kinghurst Dr. Houston, TX 77099
Phone: 832-775-1319 * Fax: 281-933-9067* email: sales@amgistoroids.com
Toll Free: 877-762-6447 * www.amgistoroids.com