

54F/74F38 Quad Two-Input NAND Buffer (Open Collector)

General Description

This device contains four independent gates, each of which performs the logic NAND function. The open-collector outputs require external pull-up resistors for proper logical operation.


Commercial	Military	Package Number	Package Description		
74F38PC		N14E	14-Lead (0.300" Wide) Molded Dual-In-Line		
	54F38DM (Note 2)	J14A	14-Lead Ceramic Dual-In-Line		
74F38SC (Note 1)		M14A	14-Lead (0.150" Wide) Molded Small Outline, JEDEC		
74F38SJ (Note 1)		M14D	14-Lead (0.300" Wide) Molded Small Outline, EIAJ		
	54F38FM (Note 2)	W14B	14-Lead Cerpack		
	54F38LM (Note 2)	E20A	20-Lead Ceramic Leadless Chip Carrier, Type C		

Note 1: Devices also available in 13" reel. Use suffix = SCX and SJX.

Note 2: Military grade device with environmental and burn-in processing. Use suffix = DMQB, FMQB and LMQB.

Logic Symbol

Connection Diagrams

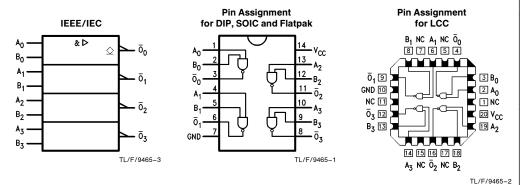

TRI-STATE® is a registered trademark of National Semiconductor Corporation

Unit Loading/Fan Out

			54F/74F				
Pin N	Pin Names Description		U.L. HIGH/LOW	Input I _{IH} /I _{IL} Output I _{OH} /I _{OL}			
A _n , B	n	Inputs Outputs	1.0/2.0 OC*/106.6 (80)	20 μA/ – 1.2 mA OC*/64 mA (48 mA)			

^{*}OC = Open Collector

Function Table

Inp	uts	Output		
Α	В	ō		
L	L	Н		
L	Н	Н		
Н	L	Н		
Н	Н	L		

H = HIGH Voltage Level

L = LOW Voltage Level

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

 $\begin{array}{lll} \mbox{Storage Temperature} & -65^{\circ}\mbox{C to} + 150^{\circ}\mbox{C} \\ \mbox{Ambient Temperature under Bias} & -55^{\circ}\mbox{C to} + 125^{\circ}\mbox{C} \\ \mbox{Junction Temperature under Bias} & -55^{\circ}\mbox{C to} + 175^{\circ}\mbox{C} \\ \mbox{Plastic} & -55^{\circ}\mbox{C to} + 150^{\circ}\mbox{C} \\ \end{array}$

V_{CC} Pin Potential to

Voltage Applied to Output

in HIGH State (with $V_{CC} = 0V$)

 $\begin{array}{lll} {\rm Standard\ Output} & -0.5{\rm V\ to\ V_{CC}} \\ {\rm TRI\text{-STATE}^{\circledast}\ Output} & -0.5{\rm V\ to\ } +5.5{\rm V} \end{array}$

Current Applied to Output

in LOW State (Max) twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature

Military $-55^{\circ}\text{C to} + 125^{\circ}\text{C}$ Commercial $0^{\circ}\text{C to} + 70^{\circ}\text{C}$

Supply Voltage

Military + 4.5V to + 5.5V Commercial + 4.5V to + 5.5V

DC Electrical Characteristics


Symbol	Parameter		54F/74F			Units	v _{cc}	Conditions	
Symbol			Min	Тур	Max	Onits	VCC	Conditions	
V _{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal	
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal	
V_{CD}	Input Clamp Diode Voltage				-1.2	V	Min	$I_{\text{IN}} = -18 \text{ mA}$	
V _{OL}	Output LOW Voltage	54F 10% V _{CC} 74F 10% V _{CC}			0.55 0.55	٧	Min	$I_{OL} = 48 \text{ mA}$ $I_{OL} = 64 \text{ mA}$	
I _{IH}	Input HIGH Current	54F 74F			20.0 5.0	μΑ	Max	$V_{\text{IN}} = 2.7V$	
I _{BVI}	Input HIGH Current Breakdown Test	54F 74F			100 7.0	μΑ	Max	V _{IN} = 7.0V	
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	$I_{\text{ID}} = 1.9 \mu\text{A}$ All Other Pins Grounded	
I _{OD}	Output Leakage Circuit Current	74F			3.75	μΑ	0.0	V _{IOD} = 150 mV All Other Pins Grounded	
I _{IL}	Input LOW Current				-1.2	mA	Max	$V_{IN} = 0.5V$	
I _{OHC}	Open Collector, Outp OFF Leakage Test	ut			250	μΑ	Min	$V_{OUT} = V_{CC}$	
Icch	Power Supply Curren	t		2.1	7.0	mA	Max	V _O = HIGH	
I _{CCL}	Power Supply Curren	t		26.0	30.0	mA	Max	$V_O = LOW$	


AC Electrical Characteristics

Symbol	Parameter	$74F$ $T_A = +25^{\circ}C$ $V_{CC} = +5.0V$ $C_L = 50 \text{ pF}$			5	4F	74F		
					$ extsf{T}_{ extsf{A}}, extsf{V}_{ extsf{CC}} = extsf{Mil} \ extsf{C}_{ extsf{L}} = extsf{50 pF}$		$ extsf{T}_{ extsf{A}}, extsf{V}_{ extsf{CC}} = extsf{Com} \ extsf{C}_{ extsf{L}} = extsf{50 pF}$		Units
		Min	Тур	Max	Min	Max	Min	Max	
t _{PLH}	Propagation Delay	6.5	9.7	12.5	6.5	14.5	6.5	13.0	ns
t _{PHL}	A_n , B_n to \overline{O}_n	1.5	2.1	5.0	1.0	5.5	1.5	5.5	


Ordering Information


The device number is used to form part of a simplified purchasing code where the package type and temperature range are defined as follows:

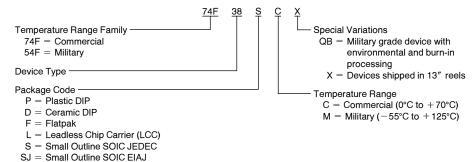

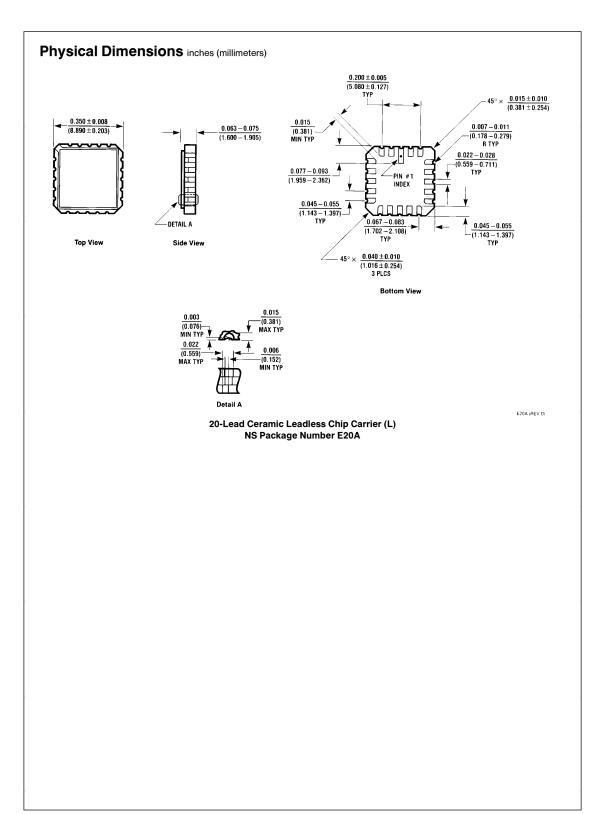








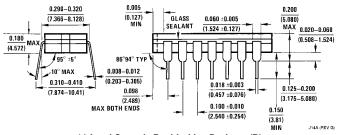


14-Lead Ceramic Dual-In-Line Package (D)
NS Package Number J14A





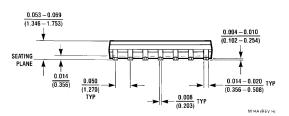


14-Lead (0.150" Wide) Molded Small Outline Package, JEDEC (S) NS Package Number M14A

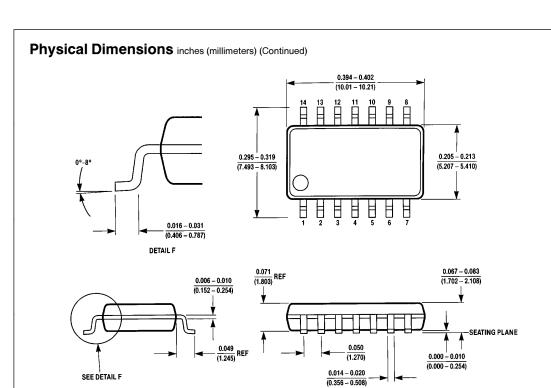


14-Lead (0.300" Wide) Molded Small Outline Package, EIAJ (SJ) NS Package Number M14D

M14D (REV A)

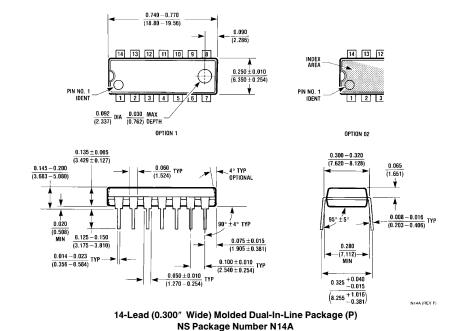

Physical Dimensions inches (millimeters) (Continued)

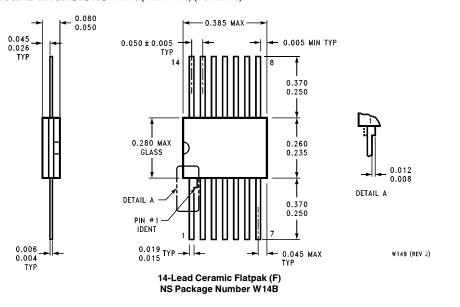

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation 2900 Semiconductor Drive P.O. Box 58090 Santa Clara, CA 95052-8090 Tel: 1(800) 272-9959 TWX: (910) 339-9240

National Semiconductor GmbH Livry-Gargan-Str. 10 D-82256 Fürstenfeldbruck Germany Tel: (81-41) 35-0 Telex: 527649 Fax: (81-41) 35-1 National Semiconductor Japan Ltd. Sumitomo Chemical Engineering Center Bldg. 7F 1-7-1, Nakase, Mihama-Ku Chiba-City, Ciba Prefecture 261

National Semiconductor Hong Kong Ltd. 13th Floor, Straight Block, Ocean Centre, 5 Canton Rd. Tsimshatsui, Kowloon Hong Kong Tel: (852) 2737-1600 Fax: (852) 2736-9960 National Semiconductores Do Brazil Ltda. Rue Deputado Lacorda Franco 120-3A Sao Paulo-SP Brazil 05418-000 Tel: (55-11) 212-5066 Telex: 391-1131931 NSBR BR Fax: (55-11) 212-1181 National Semiconductor (Australia) Pty, Ltd. Building 16 Business Park Drive Monash Business Park Nottinghilli, Melbourne Victoria 3168 Australia Tel: (3) 558-9999 Fax: (3) 558-9998