www.ti.com

# TRSF3222E 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER WITH $\pm$ 15-kV ESD PROTECTION

SLLS823-JULY 2007

#### **FEATURES**

- ESD Protection for RS-232 Bus Pins
  - ±15-kV Human-Body Model (HBM)
  - ±8-kV IEC 61000-4-2, Contact Discharge
  - ±15-kV IEC 61000-4-2, Air-Gap Discharge
- Meets or Exceeds the Requirements of TIA/EIA-232-F and ITU v.28 Standards
- Operates With 3-V to 5.5-V V<sub>CC</sub> Supply
- Operates up to 1000 kbit/s
- Two Drivers and Two Receivers
- Low Standby Current . . . 1 μA Typ
- External Capacitors . . . 4 × 0.1 μF
- Accepts 5-V Logic Input With 3.3-V Supply


#### **APPLICATIONS**

- Battery-Powered Systems
- PDAs
- Notebooks
- Laptops
- Palmtop PCs
- Hand-Held Equipment


# DESCRIPTION/ ORDERING INFORMATION

The TRSF3222E consists of two line drivers, two line receivers, and a dual charge-pump circuit with  $\pm 15$ -kV ESD protection pin to pin (serial-port connection pins, including GND).

The TRSF3222E meets the requirements of TIA/EIA-232-F and provides the electrical interface between an asynchronous communication controller and the serial-port connector. The charge pump and four small external capacitors allow operation from a single 3-V to 5.5-V supply. The TRSF3222E operates at typical data signaling rates up to 1000 kbit/s and is an improved drop-in replacement for industry-popular '3222 two-driver, two-receiver functions.



NC - No internal connection



NC - No internal connection

The TRSF3222E can be placed in the power-down mode by setting the power-down ( $\overline{PWRDOWN}$ ) input low, which draws only 1  $\mu A$  from the power supply. When the device is powered down, the receivers remain active while the drivers are placed in the high-impedance state. Also, during power down, the onboard charge pump is disabled; V+ is lowered to  $V_{CC}$ , and  $V_{CC}$  is raised toward GND. Receiver outputs also can be placed in the high-impedance state by setting enable ( $\overline{EN}$ ) high.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

## TRSF3222E 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER

WITH ±15-kV ESD PROTECTION SLLS823-JULY 2007



#### ORDERING INFORMATION

T <sub>A</sub>	PA	CKAGE <sup>(1)(2)</sup>	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	SOIC - DW	Tube of 25	TRSF3222ECDW	TRSF3222EC
	SOIC - DW	Reel of 2000	TRSF3222ECDWR	TROFSZZZEC
0°C to 70°C	SSOP – DB	Tube of 70	TRSF3222ECDB	RT22EC
0.0 10 70.0	220b – DB	Reel of 2000	TRSF3222ECDBR	- KIZZEC
	TSSOP – PW	Tube of 70	TRSF3222ECPW	RT22EC
	1330P – PW	Reel of 2000	TRSF3222ECPWR	- KIZZEC
	SOIC - DW	Tube of 25 TRSF3222EIDW		TRSF3222EI
	SOIC - DW	Reel of 2000	TRSF3222EIDWR	IRSF3222EI
−40°C to 85°C	SSOP – DB	Tube of 70	TRSF3222EIDB	RT22EI
-40°C 10 85°C	220b – DB	Reel of 2000	TRSF3222EIDBR	- KIZZEI
	TSSOP – PW	Tube of 70	TRSF3222EIPW	RT22EI
	1330F - PW	Reel of 2000	TRSF3222EIPWR	K 1 Z Z E I

- (1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.
- (2) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.

### **FUNCTION TABLES**

### Each Driver(1)

IN	PUTS	OUTPUT
DIN	<b>PWRDOWN</b>	DOUT
X	L	Z
L	Н	Н
Н	Н	L

(1) H = high level, L = low level, X = irrelevant, Z = high impedance

### Each Receiver(1)


INP	UTS	OUTPUT
RIN	EN	ROUT
L	L	Н
Н	L	L
X	Н	Z
Open	L	Н

(1) H = high level, L = low level, X = irrelevant, Z = high impedance (off), Open = input disconnected or connected driver off

www.ti.com

SLLS823-JULY 2007

## LOGIC DIAGRAM (POSITIVE LOGIC)(1)

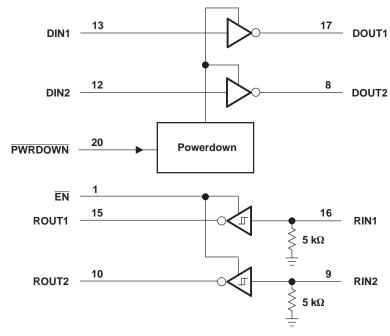

(1) Pin numbers shown are for the DB, DW, and PW packages.

## **Absolute Maximum Ratings**(1)

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage range <sup>(2)</sup>	-0.3	6	V	
V+	Positive-output supply voltage range <sup>(2)</sup>		-0.3	7	V
V-	Negative-output supply voltage range (2)		0.3	-7	V
V+ - V-	Supply voltage difference (2)			13	V
VI	lanut valta sa naga	Driver (EN, PWRDOWN)	-0.3	6	V
	Input voltage range	Receiver	-25	25	V
	Output voltage range		-13.2	13.2	V
Vo	Output voltage range	Receiver	-0.3	V <sub>CC</sub> + 0.3	V
		DB package		70	
0	Declines the small increase (3)(4)	DW package		58	0000
$\theta_{JA}$	Package thermal impedance (3)(4)	PW package		83	°C/W
	RHL package			TBD	
TJ	Operating virtual junction temperature			150	°C
T <sub>stg</sub>	Storage temperature range		-65	150	°C

<sup>(1)</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

<sup>(2)</sup> All voltages are with respect to network GND.

<sup>(3)</sup> Maximum power dissipation is a function of  $T_J(max)$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any allowable ambient temperature is  $P_D = (T_J(max) - T_A)/\theta_{JA}$ . Operating at the absolute maximum  $T_J$  of 150°C can affect reliability.

<sup>(4)</sup> The package thermal impedance is calculated in accordance with JESD 51-7.

## TRSF3222E

## 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER WITH ±15-kV ESD PROTECTION

SLLS823-JULY 2007



## Recommended Operating Conditions<sup>(1)</sup>

See Figure 5

				MIN	NOM	MAX	UNIT
	Supply voltage		V <sub>CC</sub> = 3.3 V	3	3.3	3.6	V
	Supply voltage		$V_{CC} = 5 V$	4.5	5	5.5	V
\/	Driver and control high-level input voltage	DIN, EN, PWRDOWN	$V_{CC} = 3.3 \text{ V}$	2			>
V <sub>IH</sub>	Driver and control mign-level input voltage	DIN, EN, PVVKDOVIN	$V_{CC} = 5 V$	2.4			٧
$V_{IL}$	Driver and control low-level input voltage	DIN, EN, PWRDOWN				8.0	V
$V_{I}$	Driver and control input voltage	DIN, EN, PWRDOWN		0		5.5	V
$V_{I}$	V <sub>I</sub> Receiver input voltage					25	V
т	Operating free-air temperature		TRSF3222EC	0		70	ů
IA	Operating nee-all temperature	TRSF3222EI	-40		85	C	

<sup>(1)</sup> Test conditions are C1–C4 = 0.1  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.3 V; C1 = 0.047  $\mu$ F, C2–C4 = 0.33  $\mu$ F at V<sub>CC</sub> = 5 V  $\pm$  0.5 V.

## Electrical Characteristics(1)

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 5)

	PARAMETER	TEST CONDITIONS	MIN	TYP <sup>(2)</sup>	MAX	UNIT
I	Input leakage current (EN, PWRDOWN)			±0.01	±1	μΑ
	Supply current	No load, PWRDOWN at V <sub>CC</sub>		0.3	1	mA
ICC	Supply current (powered off)	No load, PWRDOWN at GND		1	10	μΑ

<sup>(1)</sup> Test conditions are C1–C4 = 0.1  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.3 V; C1 = 0.047  $\mu$ F, C2–C4 = 0.33  $\mu$ F at V<sub>CC</sub> = 5 V  $\pm$  0.5 V. (2) All typical values are at V<sub>CC</sub> = 3.3 V or V<sub>CC</sub> = 5 V, and T<sub>A</sub> = 25°C.



## TRSF3222E 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER WITH ±15-kV ESD PROTECTION

SLLS823-JULY 2007

#### **DRIVER SECTION**

#### Electrical Characteristics<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 5)

	PARAMETER	TEST CONDITIONS			TYP <sup>(2)</sup>	MAX	UNIT
$V_{OH}$	High-level output voltage	DOUT at $R_L = 3 \text{ k}\Omega$ to GND,	DIN = GND	5	5.4		V
$V_{OL}$	Low-level output voltage	DOUT at $R_L = 3 \text{ k}\Omega$ to GND,	$DIN = V_{CC}$	-5	-5.4		V
I <sub>IH</sub>	High-level input current	$V_I = V_{CC}$	$V_I = V_{CC}$		±0.01	±1	μΑ
$I_{\rm IL}$	Low-level input current	V <sub>I</sub> at GND			±0.01	±1	μΑ
Ios	Short-circuit output current <sup>(3)</sup>	V <sub>CC</sub> = 3.6 V	V <sub>O</sub> = 0 V		±35	±60	mA
108	Short offour output outrent	$V_{CC} = 5.5 \text{ V}$	VO = 0 V		±00	±00	111/1
ro	Output resistance	$V_{CC}$ , V+, and V- = 0 V,	$V_O = \pm 2 \text{ V}$	300	10M		Ω
	Output leakage current	PWRDOWN = GND	$V_{CC} = 3 \text{ V to } 3.6 \text{ V},$ $V_{O} = \pm 12 \text{ V}$			±25	
l <sub>OZ</sub>		FYNKDOWN = GND	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V},$ $V_{O} = \pm 10 \text{ V}$			±25	μΑ

## Switching Characteristics<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 5)

	PARAMETER	TEST CONDITIONS			MIN	TYP <sup>(2)</sup>	MAX	UNIT	
		_	C <sub>L</sub> = 1000 pF		250				
	Maximum data rate (See Figure 1)	$R_L = 3 \text{ k}\Omega$ , One DOUT switching	$C_L = 250 \text{ pF},$	$V_{CC}$ = 3 V to 4.5 V	1000			kbit/s	
	(CCC rigure 1)	one Boot omicining	$C_L = 1000 \text{ pF},$	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	1000				
t <sub>sk(p)</sub>	Pulse skew <sup>(3)</sup>	$C_L = 150 \text{ pF to } 2500 \text{ pF},$	$R_L = 3 \text{ k}\Omega \text{ to } 7 \text{ k}\Omega,$	See Figure 2		300		ns	
	Slew rate, transition region (see Figure 1)	Slew rate. $R_L = 7 \text{ k}\Omega$ ,		C <sub>L</sub> = 150 pF to 1000 pF		8		90	
SR(tr)		D 010	C <sub>L</sub> = 1000 pF		12		60	V/µs	
		$R_L = 3 \text{ k}\Omega$	C <sub>L</sub> = 150 pF to 250 pF		24		150		

<sup>(1)</sup> Test conditions are C1–C4 = 0.1  $\mu$ F at  $V_{CC}$  = 3.3  $V \pm 0.3$  V; C1 = 0.047  $\mu$ F, C2–C4 = 0.33  $\mu$ F at  $V_{CC}$  = 5  $V \pm 0.5$  V. (2) All typical values are at  $V_{CC}$  = 3.3 V or  $V_{CC}$  = 5 V, and  $T_A$  = 25°C. (3) Pulse skew is defined as  $|t_{PLH}|$  of each channel of the same device.

 <sup>(1)</sup> Test conditions are C1–C4 = 0.1 μF at V<sub>CC</sub> = 3.3 V ± 0.3 V; C1 = 0.047 μF, C2–C4 = 0.33 μF at V<sub>CC</sub> = 5 V ± 0.5 V.
 (2) All typical values are at V<sub>CC</sub> = 3.3 V or V<sub>CC</sub> = 5 V, and T<sub>A</sub> = 25°C.
 (3) Short-circuit durations should be controlled to prevent exceeding the device absolute power dissipation ratings, and not more than one output should be shorted at a time.

## TRSF3222E

## 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER WITH ±15-kV ESD PROTECTION

SLLS823-JULY 2007



#### **RECEIVER SECTION**

#### Electrical Characteristics<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 5)

	PARAMETER	TEST CONDITIONS	MIN	TYP <sup>(2)</sup>	MAX	UNIT
$V_{OH}$	High-level output voltage	$I_{OH} = -1 \text{ mA}$	V <sub>CC</sub> - 0.6	V <sub>CC</sub> - 0.1		V
$V_{OL}$	Low-level output voltage	I <sub>OL</sub> = 1.6 mA			0.4	V
V	Positive-going input threshold voltage	V <sub>CC</sub> = 3.3 V		1.5	2.4	V
V <sub>IT+</sub>	Positive-going input timeshold voltage	V <sub>CC</sub> = 5 V		1.8	2.4	V
V <sub>IT</sub> _	Negative-going input threshold voltage	V <sub>CC</sub> = 3.3 V	0.6	1.2	2	V
VIT-	Negative-going input tilleshold voltage	V <sub>CC</sub> = 5 V	0.8	1.5		V
$V_{\text{hys}}$	Input hysteresis (V <sub>IT+</sub> - V <sub>IT-</sub> )			0.3		V
I <sub>OZ</sub>	Output leakage current	<u>EN</u> = 1		±0.05	±10	μA
r <sub>i</sub>	Input resistance	$V_I = \pm 3 \text{ V to } \pm 25 \text{ V}$	3	5	7	kΩ

<sup>(1)</sup> Test conditions are C1–C4 = 0.1  $\mu$ F at  $V_{CC}$  = 3.3 V  $\pm$  0.3 V; C1 = 0.047  $\mu$ F, C2–C4 = 0.33  $\mu$ F at  $V_{CC}$  = 5 V  $\pm$  0.5 V. (2) All typical values are at  $V_{CC}$  = 3.3 V or  $V_{CC}$  = 5 V, and  $T_A$  = 25°C.

## Switching Characteristics<sup>(1)</sup>


over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	TYP <sup>(2)</sup>	UNIT
t <sub>PLH</sub>	Propagation delay time, low- to high-level output	C <sub>L</sub> = 150 pF, See Figure 3	300	ns
t <sub>PHL</sub>	Propagation delay time, high- to low-level output	C <sub>L</sub> = 150 pF, See Figure 3	300	ns
t <sub>en</sub>	Output enable time	$C_L = 150 \text{ pF}, R_L = 3 \text{ k}\Omega, \text{ See Figure 4}$	200	ns
t <sub>dis</sub>	Output disable time	$C_L = 150 \text{ pF}, R_L = 3 \text{ k}\Omega, \text{ See Figure 4}$	200	ns
t <sub>sk(p)</sub>	Pulse skew <sup>(3)</sup>	See Figure 3	300	ns

<sup>(1)</sup> Test conditions are C1–C4 = 0.1  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.3 V; C1 = 0.047  $\mu$ F, C2–C4 = 0.33  $\mu$ F at V<sub>CC</sub> = 5 V  $\pm$  0.5 V. (2) All typical values are at V<sub>CC</sub> = 3.3 V or V<sub>CC</sub> = 5 V, and T<sub>A</sub> = 25°C. (3) Pulse skew is defined as  $|t_{PLH}|$  of each channel of the same device.


SLLS823-JULY 2007

#### PARAMETER MEASUREMENT INFORMATION

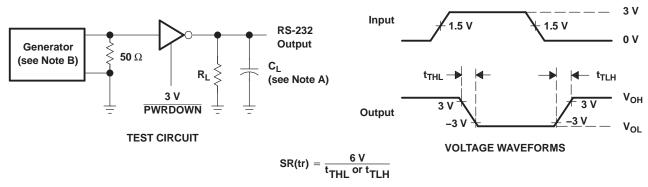


- A. C<sub>L</sub> includes probe and jig capacitance.
- B. The pulse generator has the following characteristics: PRR = 250 kbit/s,  $Z_0 = 50 \Omega$ , 50% duty cycle,  $t_r \le 10$  ns,  $t_f \le 10$  ns.

Figure 1. Driver Slew Rate

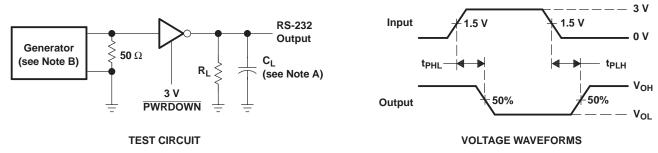

- A. C<sub>L</sub> includes probe and jig capacitance.
- B. The pulse generator has the following characteristics: PRR = 250 kbit/s,  $Z_O = 50 \Omega$ , 50% duty cycle,  $t_r \le 10$  ns,  $t_f \le 10$  ns.

Figure 2. Driver Pulse Skew

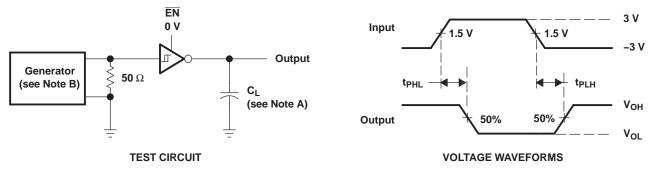


- A. C<sub>1</sub> includes probe and jig capacitance.
- B. The pulse generator has the following characteristics:  $Z_0 = 50 \ \Omega$ , 50% duty cycle,  $t_r \le 10 \ ns$ ,  $t_f \le 10 \ ns$ .

Figure 3. Receiver Propagation Delay Times



## PARAMETER MEASUREMENT INFORMATION (continued)

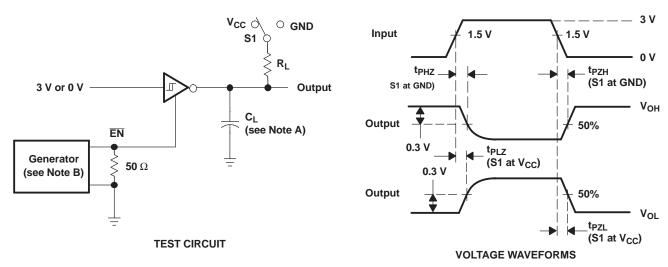


- A. C<sub>L</sub> includes probe and jig capacitance.
- B. The pulse generator has the following characteristics:  $Z_0$  = 50  $\Omega$ , 50% duty cycle,  $t_r \le 10$  ns.  $t_f \le 10$  ns.

Figure 4. Receiver Enable and Disable Times

SLLS823-JULY 2007

### **APPLICATION INFORMATION**

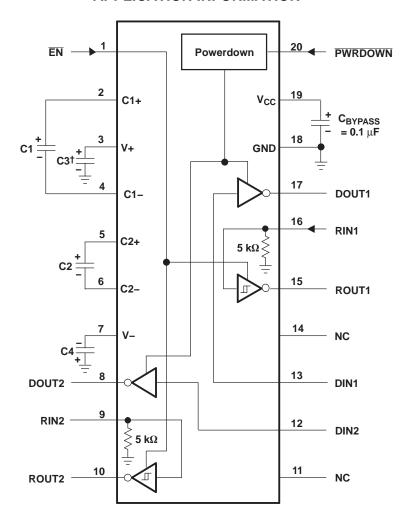

 $^{\dagger}$  C3 can be connected to  $V_{CC}\, or \, GND.$ 

NOTES: A. Resistor values shown are nominal.

- B. NC No internal connection
  - C. Nonpolarized ceramic capacitors are acceptable. If polarized tantalum or electrolytic capacitors are used, they should be connected as shown.

#### **V<sub>CC</sub> vs CAPACITOR VALUES**

V <sub>CC</sub>	C1	C2, C3, and C4
3.3 V $\pm$ 0.3 V	<b>0.1</b> μ <b>F</b>	<b>0.1</b> μ <b>F</b>
5 V $\pm$ 0.5 V	<b>0.047</b> μ <b>F</b>	<b>0.33</b> μF
3 V to 5.5 V	<b>0.1</b> μF	<b>0.47</b> μ <b>F</b>

Figure 5. Typical Operating Circuit and Capacitor Values



## **PACKAGING INFORMATION**

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
TRSF3222ECDB	ACTIVE	SSOP	DB	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222ECDBG4	ACTIVE	SSOP	DB	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222ECDBR	ACTIVE	SSOP	DB	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222ECDBRG4	ACTIVE	SSOP	DB	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222ECDW	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222ECDWG4	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222ECDWR	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222ECDWRG4	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222ECPW	ACTIVE	TSSOP	PW	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222ECPWG4	ACTIVE	TSSOP	PW	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222ECPWR	ACTIVE	TSSOP	PW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222ECPWRG4	ACTIVE	TSSOP	PW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222EIDB	ACTIVE	SSOP	DB	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222EIDBG4	ACTIVE	SSOP	DB	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222EIDBR	ACTIVE	SSOP	DB	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222EIDBRG4	ACTIVE	SSOP	DB	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222EIDW	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222EIDWG4	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222EIDWR	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222EIDWRG4	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222EIPW	ACTIVE	TSSOP	PW	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222EIPWG4	ACTIVE	TSSOP	PW	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222EIPWR	ACTIVE	TSSOP	PW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRSF3222EIPWRG4	ACTIVE	TSSOP	PW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM

 $<sup>^{(1)}</sup>$  The marketing status values are defined as follows:



#### PACKAGE OPTION ADDENDUM

26-Sep-2007

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.






i.com 11-Mar-2008


### TAPE AND REEL INFORMATION

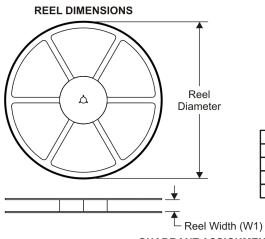



	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

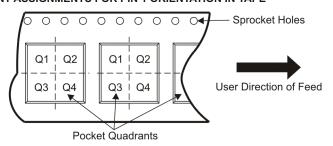

\*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TRSF3222ECDBR	SSOP	DB	20	2000	330.0	16.4	8.2	7.5	2.5	12.0	16.0	Q1
TRSF3222ECDWR	SOIC	DW	20	2000	330.0	24.4	10.8	13.0	2.7	12.0	24.0	Q1
TRSF3222ECPWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.1	1.6	8.0	16.0	Q1
TRSF3222EIDBR	SSOP	DB	20	2000	330.0	16.4	8.2	7.5	2.5	12.0	16.0	Q1
TRSF3222EIDWR	SOIC	DW	20	2000	330.0	24.4	10.8	13.0	2.7	12.0	24.0	Q1
TRSF3222EIPWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.1	1.6	8.0	16.0	Q1



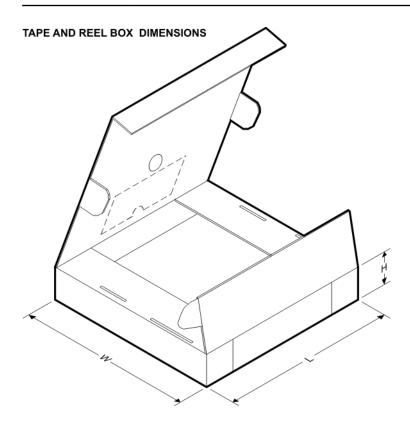

\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TRSF3222ECDBR	SSOP	DB	20	2000	346.0	346.0	33.0
TRSF3222ECDWR	SOIC	DW	20	2000	346.0	346.0	41.0
TRSF3222ECPWR	TSSOP	PW	20	2000	346.0	346.0	33.0
TRSF3222EIDBR	SSOP	DB	20	2000	346.0	346.0	33.0
TRSF3222EIDWR	SOIC	DW	20	2000	346.0	346.0	41.0
TRSF3222EIPWR	TSSOP	PW	20	2000	346.0	346.0	33.0

## PW (R-PDSO-G\*\*)

#### 14 PINS SHOWN

## PLASTIC SMALL-OUTLINE PACKAGE



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-153

## DW (R-PDSO-G20)

## PLASTIC SMALL-OUTLINE PACKAGE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MS-013 variation AC.



#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

#### **Products Amplifiers** amplifier.ti.com Data Converters dataconverter.ti.com DSP dsp.ti.com Clocks and Timers www.ti.com/clocks Interface interface.ti.com Logic logic.ti.com Power Mgmt power.ti.com microcontroller.ti.com Microcontrollers www.ti-rfid.com RF/IF and ZigBee® Solutions www.ti.com/lprf

Applications	
Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2008, Texas Instruments Incorporated