

- Single Supply or Dual Supplies
- Wide Range of Supply Voltage ... 2 V to 36 V
- Low Supply-Current Drain Independent of Supply Voltage . . . 0.4 mA Typ Per Comparator
- Low Input Bias Current . . . 25 nA Typ
- Low Input Offset Current . . . 3 nA Typ (LM193)
- Low Input Offset Voltage . . . 2 mV Typ
- Common-Mode Input Voltage Range Includes Ground
- Differential Input Voltage Range Equal to Maximum-Rated Supply Voltage . . . ±36 V
- Low Output Saturation Voltage
- Output Compatible With TTL, MOS, and CMOS
- LM2903Q Available in Q-Temp Automotive
 - High-Reliability Automotive Applications
 - Configuration Control/Print Support
 - Qualification to Automotive Standards
- For Single Version in SOT23-5, See TL331
 Data Sheet

LM193...D OR JG PACKAGE
LM293...D OR P PACKAGE
LM293A...D PACKAGE
LM393, LM393A...D, P, PS, OR PW PACKAGE
LM2903...D, P, PS, OR PW PACKAGE
LM2903Q...D PACKAGE
(TOP VIEW)



LM193... FK PACKAGE (TOP VIEW)



NC - No internal connection

description/ordering information

These devices consist of two independent voltage comparators that are designed to operate from a single power supply over a wide range of voltages. Operation from dual supplies also is possible as long as the difference between the two supplies is 2 V to 36 V, and V_{CC} is at least 1.5 V more positive than the input common-mode voltage. Current drain is independent of the supply voltage. The outputs can be connected to other open-collector outputs to achieve wired-AND relationships.

The LM193 is characterized for operation from –55°C to 125°C. The LM293 and LM293A are characterized for operation from –25°C to 85°C. The LM393 and LM393A are characterized for operation from 0°C to 70°C. The LM2903 is characterized for operation from –40°C to 125°C. The LM2903Q is tested from –40°C to 125°C and is manufactured to demanding automotive requirements.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



description/ordering information (continued)

ORDERING INFORMATION

TA	V _{IO(max}) AT 25°C	PACKAGE [†]		ORDERABLE PART NUMBER	TOP-SIDE MARKING
		PDIP (P)	Tube of 50	LM393P	LM393P
		COIC (D)	Tube of 75	LM393D	LM393
	5 mV	SOIC (D)	Reel of 2500	LM393DR	LIVI393
	5 111 0	SOP (PS)	Reel of 2000	LM393PSR	L393
		TSSOP (PW)	Tube of 150	LM393PW	L393
0°C to 70°C		1550P (PW)	Reel of 2000	LM393PWR	L393
		PDIP (P)	Tube of 50	LM393AP	LM393AP
		SOIC (D)	Tube of 75	LM393AD	LM393A
	2 mV	30IC (D)	Reel of 2500	LM393ADR	LIVIS9SA
		SOP (PS)	Reel of 2000	LM393APSR	L393A
		TSSOP (PW)	Reel of 2000	LM393APWR	L393A
	5 mV	PDIP (P)	Tube of 50	LM293P	LM293P
		SOIC (D)	Tube of 75	LM293D	LM293
–25°C to 85°C			Reel of 2500	LM293DR	LIVI293
	2 mV	COIC (D)	Tube of 75	LM293AD	LM293A
		SOIC (D)	Reel of 2500	LM293ADR	LIVIZ93A
	7 mV	PDIP (P)	Tube of 50	LM2903P	LM2903P
			Tube of 75	LM2903D	LM2903
		SOIC (D)	Reel of 2500	LM2903DR	LIVI2903
-40°C to 125°C		SOIC (D)	Tube of 75	LM2903QD	LM2903QD
			Reel of 2500	LM2903QDR	LIM2903QD
		SOP (PS)	Reel of 2000	LM2903PSR	L2903
		TSSOP (PW)	Reel of 2000	LM2903PWR	L2903
–55°C to 125°C	5 mV	CDIP (JG)	Tube of 50	LM193JG	LM193JG
		LCCC (FK)	Tube of 55	LM193FK	LM193FK
		SOIC (D)	Tube of 75	LM193D	LM193D


[†] Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

symbol (each comparator)





schematic (each comparator)

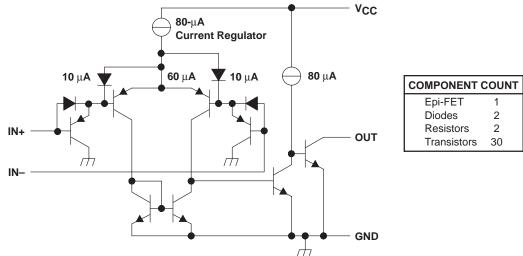

Current values shown are nominal.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage, V _{CC} (see Note 1)		36 V
Differential input voltage, V _{ID} (see Note 2)		
Input voltage range, V _I (either input)		
Output voltage, VO		
Output current, IO		20 mA
Duration of output short-circuit to ground (see Note 3		
Package thermal impedance, θ_{JA} (see Notes 4 and 5	5): D package	97°C/W
	P package	85°C/W
	PS package	95°C/W
	PW package	149°C/W
Package thermal impedance, θ_{JC} (see Notes 6 and 7	7): FK package	5.61°C/W
	JG package	14.5°C/W
Operating virtual junction temperature, T _J		150°C
Case temperature for 60 seconds: FK package		260°C
Lead temperature 1,6 mm (1/16 inch) from case for 1	0 seconds: D, P, PS, or PW package	260°C
Lead temperature 1,6 mm (1/16 inch) from case for 6	60 seconds: JG package	300°C
Storage temperature range, T _{stg}		. -65°C to 150°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential voltages, are with respect to GND.
 - 2. Differential voltages are at IN+ with respect to IN-.
 - 3. Short circuits from outputs to V_{CC} can cause excessive heating and eventual destruction.
 - 4. Maximum power dissipation is a function of $T_J(max)$, θ_{JA} , and T_A . The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(max) T_A)/\theta_{JA}$. Operating at the absolute maximum T_J of 150°C can affect reliability.
 - 5. The package thermal impedance is calculated in accordance with JESD 51-7.
 - 6. Maximum power dissipation is a function of $T_J(max)$, θ_{JC} , and T_C . The maximum allowable power dissipation at any allowable case temperature is $P_D = (T_J(max) T_C)/\theta_{JC}$. Operating at the absolute maximum T_J of 150°C can affect reliability.
 - 7. The package thermal impedance is calculated in accordance with MIL-STD-883.



LM193, LM293, LM293A, LM393 LM393A, LM2903, LM2903Q **DUAL DIFFERENTIAL COMPARATORS**

SLCS005L - JUNE 1976 - REVISED AUGUST 2003

electrical characteristics at specified free-air temperature, $V_{CC} = 5 \text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T _A †	LM193		LM293 LM393		UNIT			
					MIN	TYP	MAX	MIN	TYP	MAX		
VIO	Input offset voltage	V _{CC} = 5 V to 30 V, V _O = 1.4 V, V _{IC} = V _{IC} (min)		25°C		2	5		2	5	mV	
V10	input onset voltage			Full range			9			9		
lio.	Input offset current	V _O = 1.4 V		25°C		3	25		5	50		
lio	input onset current	VO = 1.4 V		Full range			100			250	nA	
l.s	Input bias current	V _O = 1.4 V		25°C		-25	-100		-25	-250	nA	
IB	input bias current			Full range			-300			-400	nA	
V	Common-mode			25°C	0 to V _{CC} -1.5			0 to V _{CC} -1.5			V	
VICR	VICR input voltage range‡			Full range	0 to V _{CC} -2			0 to V _{CC} -2			V	
AVD	Large-signal differential-voltage amplification	$V_{CC} = 15 \text{ V},$ $V_{O} = 1.4 \text{ V to } 1$ $R_{L} \ge 15 \text{ k}\Omega \text{ to } V$		25°C	50	200		50	200		V/mV	
lou	High-level	V _{OH} = 5 V,	V _{ID} = 1 V	25°C		0.1			0.1	50	nA	
ЮН	output current	V _{OH} = 30 V,	V _{ID} = 1 V	Full range			1			1	μΑ	
V/01	VOL Low-level output voltage	I _{OL} = 4 mA,	la. 4 m A	V _{ID} = -1 V	25°C		150	400		150	400	mV
VOL			ΛID = -1 Λ	Full range			700			700	IIIV	
loL	Low-level output current	V _{OL} = 1.5 V,	V _{ID} = -1 V	25°C	6			6			mA	
laa	Cumply ourrent	D.	V _{CC} = 5 V	25°C		0.8	1		0.8	1	A	
ICC	Supply current	R _L = ∞	V _{CC} = 30 V	Full range			2.5			2.5	mA	

[†] Full range (MIN or MAX) for LM193 is –55°C to 125°C, for LM293 is 25°C to 85°C, and for LM393 is 0°C to 70°C. All characteristics are measured with zero common-mode input voltage, unless otherwise specified.



[‡] The voltage at either input or common-mode should not be allowed to go negative by more than 0.3 V. The upper end of the common-mode voltage range is $V_{CC+} - 1.5 \text{ V}$, but either or both inputs can go to 30 V without damage.

electrical characteristics at specified free-air temperature, $V_{CC} = 5 \text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T _A †	LM293A LM393A		LM2903 LM2903Q		UNIT		
					MIN	TYP	MAX	MIN	TYP	MAX	
VIO	Input offset voltage	V _{CC} = 5 V to 30 V, V _O = 1.4 V, V _{IC} = V _{IC} (min)		25°C		1	2		2	7	mV
V10	input onset voltage			Full range			4			15	
110	Input offset current	V _O = 1.4 V		25°C		5	50		5	50	nA
10	input onset current	VO = 1.4 V		Full range			150			200	nA
1.5	Input bias current	Vo = 1.4.V		25°C		-25	-250		-25	-250	nA
IB	input bias current	V _O = 1.4 V		Full range			-400			-500	TIA.
\/	Common-mode			25°C	0 to V _{CC} -1.5			0 to V _{CC} -1.5			V
VICR	VICR input voltage range‡			Full range	0 to V _{CC} -2			0 to V _{CC} -2			V
AVD	Large-signal differential-voltage amplification	V_{CC} = 15 V, V_{O} = 1.4 V to 1 $R_{L} \ge$ 15 k Ω to V		25°C	50	200		25	100		V/mV
lou	High-level	V _{OH} = 5 V,	V _{ID} = 1 V	25°C		0.1	50		0.1	50	nA
ЮН	output current	V _{OH} = 30 V,	V _{ID} = 1 V	Full range			1			1	μΑ
\/a.	Low-level	I _{OL} = 4 mA,	V 4 V	25°C		150	400		150	400	mV
VOL	VOL output voltage		$V_{ID} = -1 V$	Full range			700			700	IIIV
lOL	Low-level output current	V _{OL} = 1.5 V,	V _{ID} = -1 V	25°C	6			6			mA
la a	0 1 1	D.	V _{CC} = 5 V	25°C		0.8	1		0.8	1	A
Icc	Supply current	R _L = ∞	∞ V _{CC} = 30 V	Full range			2.5			2.5	mA

[†] Full range (MIN or MAX) for LM293A is 25°C to 85°C, for LM393A is 0°C to 70°C, and for LM2903 and LM2903Q is –40°C to 125°C. All characteristics are measured with zero common-mode input voltage, unless otherwise specified.

switching characteristics, $V_{CC} = 5 \text{ V}$, $T_A = 25^{\circ}\text{C}$

PARAMETER	TEST CO	NDITIONS	LM193 LM293, LM293A LM393, LM393A LM2903, LM2903Q	UNIT
Response time	R _L connected to 5 V through 5.1 kΩ,	100-mV input step with 5-mV overdrive	1.3	
	CL = 15 pF§, See Note 8	TTL-level input step	0.3	μs

 $[\]$ C_L includes probe and jig capacitance.


NOTE 8: The response time specified is the interval between the input step function and the instant when the output crosses 1.4 V.



[‡] The voltage at either input or common-mode should not be allowed to go negative by more than 0.3 V. The upper end of the common-mode voltage range is V_{CC+} – 1.5 V, but either or both inputs can go to 30 V without damage.

JG (R-GDIP-T8)

CERAMIC DUAL-IN-LINE

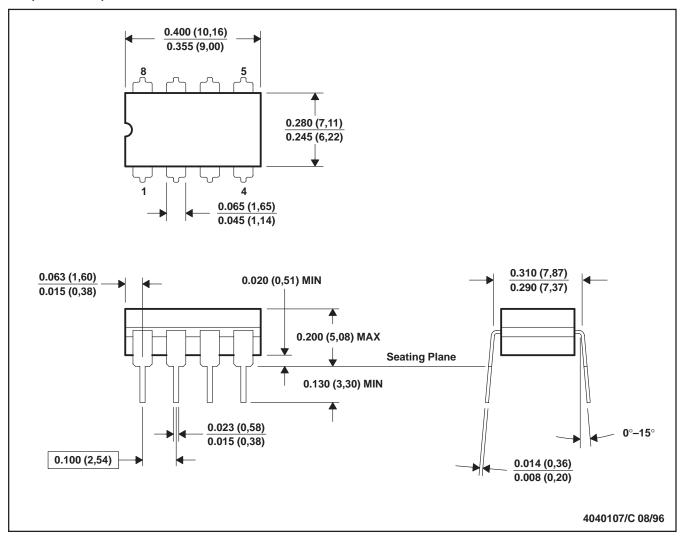


NOTES: A. All linear dimensions are in inches (millimeters).

- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification.
- E. Falls within MIL STD 1835 GDIP1-T8

FK (S-CQCC-N**)

28 TERMINAL SHOWN

LEADLESS CERAMIC CHIP CARRIER

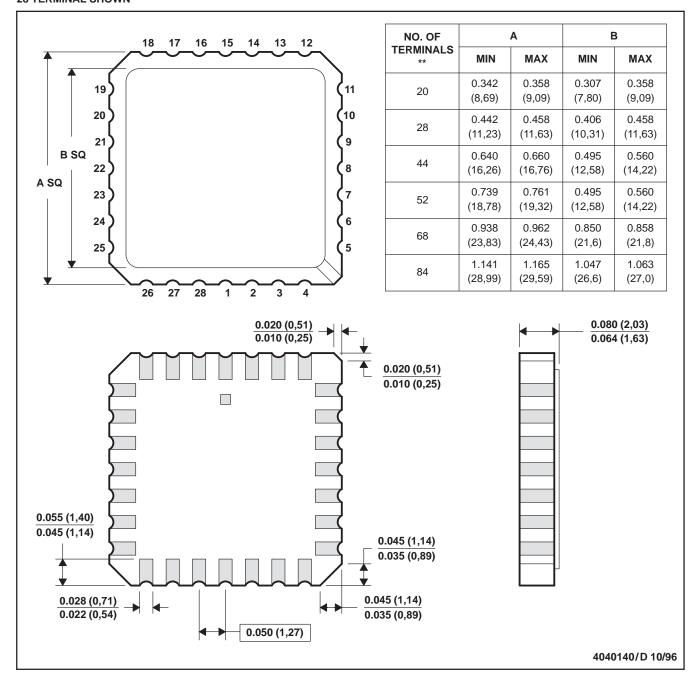

- NOTES: A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. This package can be hermetically sealed with a metal lid.
 - D. The terminals are gold plated.
 - E. Falls within JEDEC MS-004



P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE



NOTES: A. All linear dimensions are in inches (millimeters).


- B. This drawing is subject to change without notice.
- C. Falls within JEDEC MS-001

For the latest package information, go to http://www.ti.com/sc/docs/package/pkg_info.htm

D (R-PDSO-G**)

PLASTIC SMALL-OUTLINE PACKAGE

8 PINS SHOWN

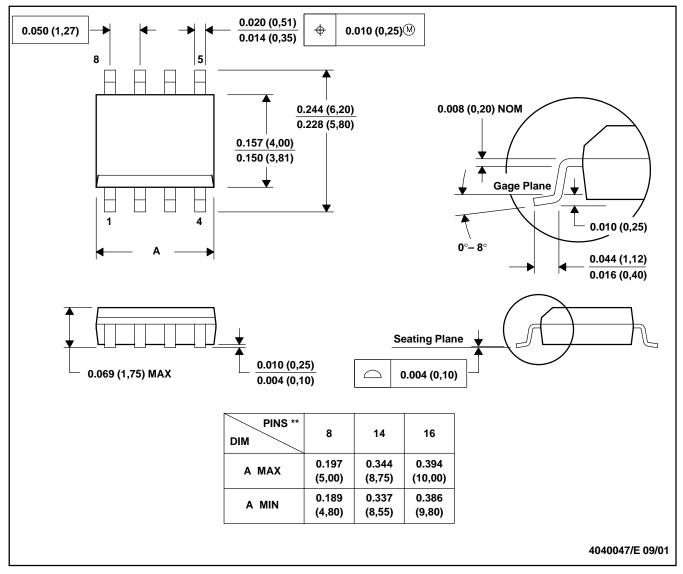


NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion, not to exceed 0.006 (0,15).

D. Falls within JEDEC MS-012

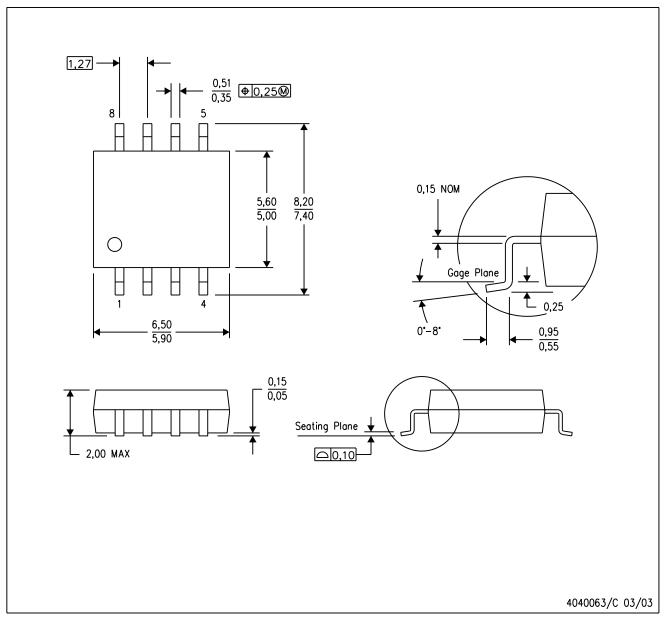

NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.


C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



PW (R-PDSO-G**)

14 PINS SHOWN

PLASTIC SMALL-OUTLINE PACKAGE

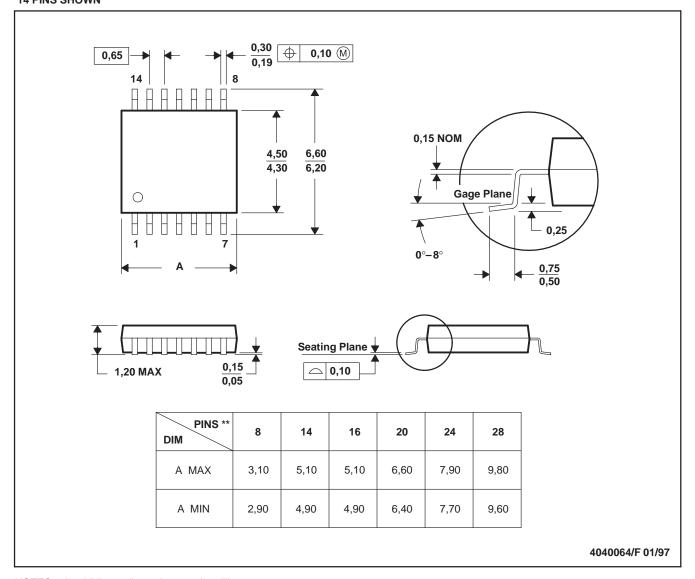

NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-153

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments

Post Office Box 655303 Dallas, Texas 75265

Copyright © 2003, Texas Instruments Incorporated