## TPS3820-xx, TPS3823-xx, TPS3824-xx, TPS3825-xx, TPS3828-xx PROCESSOR SUPERVISORY CIRCUITS

SLVS165E - APRIL 1998 - REVISED DECEMBER 2002

#### features

- Power-On Reset Generator With Fixed Delay Time of 200 ms (TPS3823/4/5/8) or 25 ms (TPS3820)
- Manual Reset Input (TPS3820/3/5/8)
- Reset Output Available in Active-Low (TPS3820/3/4/5), Active-High (TPS3824) and Open-Drain (TPS3828)
- Supply Voltage Supervision Range 2.5 V, 3 V, 3.3 V, 5 V
- Watchdog Timer (TPS3820/3/4/8)
- Supply Current of 15 μA (Typ)
- SOT23-5 Package
- Temperature Range . . . −40°C to 85°C

### applications


- Applications Using DSPs, Microcontrollers, or Microprocessors
- Industrial Equipment
- Programmable Controls
- Automotive Systems
- Portable/Battery-Powered Equipment
- Intelligent Instruments
- Wireless Communications Systems
- Notebook/Desktop Computers

### description


The TPS382x family of supervisors provides circuit initialization and timing supervision, primarily for DSP and processor-based systems.

During power-on,  $\overline{RESET}$  is asserted when supply voltage V<sub>DD</sub> becomes higher than 1.1 V. Thereafter, the supply voltage supervisor monitors V<sub>DD</sub> and keeps  $\overline{RESET}$  active as long as V<sub>DD</sub> remains below the threshold voltage V<sub>IT</sub>...


# TPS3820, TPS3823, TPS3828...DBV PACKAGE (TOP VIEW)




### TPS3824...DBV PACKAGE (TOP VIEW)



### TPS3825 . . . DBV PACKAGE (TOP VIEW)



### typical application

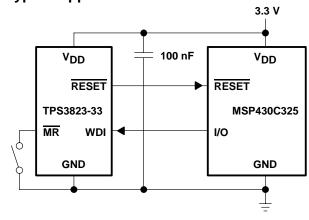

An internal timer delays the return of the output to the inactive state (high) to ensure proper system reset. The delay time,  $t_d$ , starts after  $V_{DD}$  has risen above the threshold voltage  $V_{IT}$ . When the supply voltage drops below the threshold voltage  $V_{IT}$ , the output becomes active (low) again. No external components are required. All the devices of this family have a fixed-sense threshold voltage  $V_{IT}$  set by an internal voltage divider.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.




### TPS3820-xx, TPS3823-xx, TPS3824-xx, TPS3825-xx, TPS3828-xx PROCESSOR SUPERVISORY CIRCUITS

SLVS165E - APRIL 1998 - REVISED DECEMBER 2002

### description (continued)

The TPS3820/3/5/8 devices incorporate a manual reset input, MR. A low level at MR causes RESET to become active. The TPS3824/5 devices include a high-level output RESET. TPS3820/3/4/8 have a watchdog timer that is periodically triggered by a positive or negative transition at WDI. When the supervising system fails to retrigger the watchdog circuit within the time-out interval, t<sub>tout</sub>, RESET becomes active for the time period t<sub>d</sub>. This event also reinitializes the watchdog timer. Leaving WDI unconnected disables the watchdog.

In applications where the input to the WDI pin may be active (transitioning high and low) when the TPS3820/3/4/8 is asserting RESET, the TPS3820/3/4/8 does not return to a non-reset state when the input voltage is above Vt. If the application requires that input to WDI is active when RESET is asserted, WDI must be decoupled from the active signal. This can be accomplished by using an N-channel FET in series with the WDI pin, with the gate of the FET connected to the RESET output as shown in Figure 1.

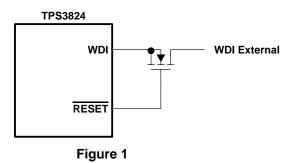

The product spectrum is designed for supply voltages of 2.5 V, 3 V, 3.3 V, and 5 V. The circuits are available in a 5-pin SOT23-5 package. The TPS382x devices are characterized for operation over a temperature range of -40°C to 85°C.

#### PACKAGE INFORMATION

	TAGRAGET	NEORIVIATION	
DEVICE NAME	DEVICE NAME	THRESHOLD VOLTAGE§	MARKING
TPS3820-33DBVT <sup>†</sup>	TPS3820-33DBVR <sup>‡</sup>	2.93 V	PDEI
TPS3820-50DBVT <sup>†</sup>	TPS3820-50DBVR <sup>‡</sup>	4.55 V	PDDI
TPS3823-25DBVT <sup>†</sup>	TPS3823-25DBVR <sup>‡</sup>	2.25 V	PAPI
TPS3823-30DBVT <sup>†</sup>	TPS3823-30DBVR <sup>‡</sup>	2.63 V	PAQI
TPS3823-33DBVT <sup>†</sup>	TPS3823-33DBVR <sup>‡</sup>	2.93 V	PARI
TPS3823-50DBVT <sup>†</sup>	TPS3823-50DBVR <sup>‡</sup>	4.55 V	PASI
TPS3824-25DBVT <sup>†</sup>	TPS3824-25DBVR <sup>‡</sup>	2.25 V	PATI
TPS3824-30DBVT <sup>†</sup>	TPS3824-30DBVR <sup>‡</sup>	2.63 V	PAUI
TPS3824-33DBVT <sup>†</sup>	TPS3824-33DBVR <sup>‡</sup>	2.93 V	PAVI
TPS3824-50DBVT <sup>†</sup>	TPS3824-50DBVR <sup>‡</sup>	4.55 V	PAWI
TPS3825-33DBVT <sup>†</sup>	TPS3825-33DBVR <sup>‡</sup>	2.93 V	PDGI
TPS3825-50DBVT <sup>†</sup>	TPS3825-50DBVR <sup>‡</sup>	4.55 V	PDFI
TPS3828-33DBVT <sup>†</sup>	TPS3828-33DBVR <sup>‡</sup>	2.93 V	PDII
TPS3828-50DBVT†	TPS3828-50DBVR <sup>‡</sup>	4.55 V	PDHI

<sup>†</sup> The DBVT package indicates tape and reel of 250 parts.



<sup>&</sup>lt;sup>‡</sup>The DBVR package indicates tape and reel of 3000 parts.


<sup>§</sup> For other threshold voltage versions, please contact the local TI sales office.

### **FUNCTION/TRUTH TABLE**


INP	UTS	OUTF	PUTS
MR¶	V <sub>DD</sub> >V <sub>IT</sub>	RESET	RESET#
L	0	L	Н
L	1	L	Н
Н	0	L	Н
Н	1	Н	L

<sup>¶</sup> TPS3820/3/5/8 # TPS3824/5

### functional block diagram

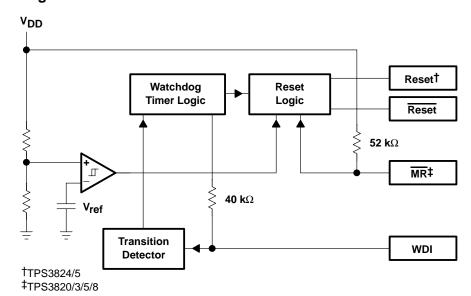

### timing diagram

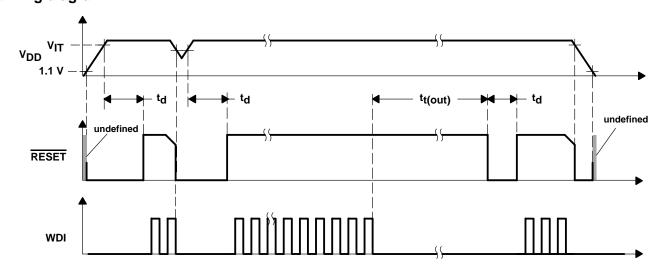

## TPS3820-xx, TPS3823-xx, TPS3824-xx, TPS3825-xx, TPS3828-xx PROCESSOR SUPERVISORY CIRCUITS

SLVS165E - APRIL 1998 - REVISED DECEMBER 2002

### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage, V <sub>DD</sub> (see Note 1)	6 V
RESET, RESET, MR, WDI (see Note 1)	$-0.3 \text{ V to } (V_{DD} + 0.3 \text{ V})$
Maximum low output current, I <sub>OL</sub>	5 mA
Maximum high output current, IOH	–5 mA
Input clamp current range, $I_{IK}$ ( $V_I < 0$ or $V_I > V_{DD}$ )	±10 mA
Output clamp current range, $I_{OK}$ ( $V_O < 0$ or $V_O > V_{DD}$ )	±10 mA
Continuous total power dissipation	See Dissipation Rating Table
Operating free-air temperature range, T <sub>A</sub>	–40°C to 85°C
Storage temperature range, T <sub>stq</sub>	
Soldering temperature	260°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltage values are with respect to GND.

#### **DISSIPATION RATING TABLE**

PACKAGE	$T_A \le 25^{\circ}C$ POWER RATING	OPERATING FACTOR ABOVE T <sub>A</sub> = 25°C	T <sub>A</sub> = 70°C POWER RATING	T <sub>A</sub> = 85°C POWER RATING
DBV	437 mW	3.5 mW/°C	280 mW	227 mW

### recommended operating conditions

	MIN	N MAX	UNIT
Supply voltage, V <sub>DD</sub>	1.	1 5.5	V
Input voltage, V <sub>I</sub>		0 V <sub>DD</sub> + 0.3	V
High-level input voltage at MR and WDI, VIH	0.7×1	√DD	V
Low-level input voltage, V <sub>IL</sub>		$0.3 \times V_{DD}$	V
Input transition rise and fall rate at $\overline{\text{MR}}$ or WDI, $\Delta t/\Delta V$		100	ns/V
Operating free-air temperature range, TA	-40	0 85	°C



## TPS3820-xx, TPS3823-xx, TPS3824-xx, TPS3825-xx, TPS3828-xx PROCESSOR SUPERVISORY CIRCUITS

SLVS165E - APRIL 1998 - REVISED DECEMBER 2002

### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

	PARAMETER	1		TEST CONDITIONS	MIN	TYP	MAX	UNIT
			TPS382x-25	$V_{DD} = V_{IT-} + 0.2 \text{ V}$ $I_{OH} = -20 \mu\text{A}$				
		RESET	TPS382x-30 TPS382x-33	V <sub>DD</sub> = V <sub>IT</sub> + 0.2 V I <sub>OH</sub> = -30 μA	0.8 × V <sub>DD</sub>			V
			TPS382x-50	V <sub>DD</sub> = V <sub>IT</sub> + 0.2 V I <sub>OH</sub> = -120 μA	V <sub>DD</sub> – 1.5 V			
Vон	High-level output voltage		TPS3824-25 TPS3825-25	$V_{DD} \ge 1.8 \text{ V}, I_{OH} = -100 \mu\text{A}$				
			TPS3824-30 TPS3825-30					
		RESET	TPS3824-33 TPS3825-33	V <sub>DD</sub> ≥ 1.8 V, I <sub>OH</sub> = −150 μA	0.8 × V <sub>DD</sub>			V
			TPS3824-50 TPS3825-50					
			TPS3824-25 TPS3825-25	V <sub>DD</sub> = V <sub>IT</sub> + 0.2 V I <sub>OL</sub> = 1 mA				
	V <sub>OL</sub> Low-level output voltage	RESET	TPS3824-30 TPS3825-30	V <sub>DD</sub> = V <sub>IT</sub> _ + 0.2 V				.,
			TPS3824-33 TPS3825-33	I <sub>OL</sub> = 1.2 mA			0.4	V
VOL			TPS3824-50 TPS3825-50	$V_{DD} = V_{IT-} + 0.2 V$ $I_{OL} = 3 \text{ mA}$				
			TPS382x-25	$V_{DD} = V_{IT} - 0.2 V$ $I_{OL} = 1 \text{ mA}$				
		RESET	TPS382x-30	V <sub>DD</sub> = V <sub>IT</sub> -0.2 V			0.4	V
		KLOLI	TPS382x-33	$I_{OL} = 1.2 \text{ mA}$			0.4	V
			TPS382x-50	$V_{DD} = V_{IT} - 0.2 V$ $I_{OL} = 3 \text{ mA}$				
	Power-up reset voltage (see	Note 2)		$V_{DD} \ge 1.1 \text{ V}, \ I_{OL} = 20 \ \mu\text{A}$			0.4	V
			TPS382x-25		2.21	2.25	2.30	
			TPS382x-30	T <sub>A</sub> = 0°C - 85°C	2.59	2.63	2.69	V
			TPS382x-33	1A = 0 0 00 0	2.88	2.93	3	V
V <sub>IT</sub> _	Negative-going input thresho	ld	TPS382x-50		4.49	4.55	4.64	
'  -	vIT- voltage (see Note 3)		TPS382x-25		2.20	2.25	2.30	
			TPS382x-30	T <sub>A</sub> = -40°C - 85°C	2.57	2.63	2.69	V
			TPS382x-33	l '`	2.86	2.93	3	
			TPS382x-50		4.46	4.55	4.64	
			TPS382x-25	-		00		
$V_{hys}$	Hysteresis at V <sub>DD</sub> input		TPS382x-30 TPS382x-33	1	30		mV	
			TPS382x-50			50		
			1 F 3302X-30			50		

NOTES: 2. The lowest supply voltage at which  $\overline{RESET}$  becomes active.  $t_{r, VDD} \ge 15 \,\mu\text{s/V}$ 



<sup>3.</sup> To ensure best stability of the threshold voltage, a bypass capacitor (ceramic,  $0.1 \, \mu F$ ) should be placed near the supply terminals.

## TPS3820-xx, TPS3823-xx, TPS3824-xx, TPS3825-xx, TPS3828-xx PROCESSOR SUPERVISORY CIRCUITS

SLVS165E - APRIL 1998 - REVISED DECEMBER 2002

### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted) (continued)

	PARAMETER	1		TEST CONDITIONS	MIN TYP	MAX	UNIT	
I <sub>IH</sub> (AV)	Average high-level input curre	ent	WDI	WDI = V <sub>DD</sub> , time average (dc = 88%)	120			
I <sub>IL(AV)</sub>	Average low-level input curre	ge low-level input current		WDI = 0.3 V, V <sub>DD</sub> = 5.5 V time average (dc = 12%)	-15			
	High-level input current		WDI	$WDI = V_{DD}$	140	190	μА	
ΙΗ			MR	$\overline{MR} = V_{DD} \times 0.7,$ $V_{DD} = 5.5 \text{ V}$	-40	-60		
	Low-level input current		WDI	$WDI = 0.3 \text{ V}, \ V_{DD} = 5.5 \text{ V}$	140	190		
¹IL			MR	$\overline{MR} = 0.3 \text{ V}, \ \text{V}_{DD} = 5.5 \text{ V}$	-110	-160		
			TPS382x-25					
	Output short-circuit current	DECET	TPS382x-30	$V_{DD} = V_{IT, max} + 0.2 V,$		-400		
los	(see Note 4)	RESET	TPS382x-33	V <sub>O</sub> = 0 V			μΑ	
			TPS382x-50	]	-80		1	
I <sub>DD</sub>	DD Supply current		WDI and MR unconnected, Outputs unconnected	15	25	μΑ		
Internal pullup resistor at MR			52		kΩ			
Ci	Input capacitance at MR, WD	)I		V <sub>I</sub> = 0 V to 5.5 V	5		pF	

NOTE 4: The RESET short-circuit current is the maximum pullup current when RESET is driven low by a μP bidirectional reset pin.


### timing requirements at R $_L$ = 1 M $\Omega,\,C_L$ = 50 pF, $T_A$ = 25 $^{\circ}C$


	PARAMET	ER	TEST CONDITIONS	MIN	MAX	UNIT
		at V <sub>DD</sub>	$V_{DD} = V_{IT-} + 0.2 \text{ V},  V_{DD} = V_{IT-} - 0.2 \text{ V}$	6		μs
t <sub>W</sub>	Pulse width	at MR	$V_{DD} \ge V_{IT-} + 0.2 \text{ V}, \qquad V_{IL} = 0.3 \text{ x } V_{DD}, \qquad V_{IH} = 0.7 \text{ x } V_{DD}$	1		μs
		at WDI	$V_{DD} \ge V_{IT-} + 0.2 \text{ V},  V_{IL} = 0.3 \text{ x } V_{DD},  V_{IH} = 0.7 \text{ x } V_{DD}$	100		ns


### switching characteristics at R $_L$ = 1 M $\Omega,\,C_L$ = 50 pF, $T_A$ = 25 $^{\circ}C$


	PARAME	TER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
	Matabala a tima a aut	TPS3820	$V_{DD} \ge V_{IT-} + 0.2 V$ ,	112	200	310	ms
ttout	Watchdog time out	TPS3823/4/8	See Timing Diagram	0.9	1.6	2.5	S
	Delevities	TPS3820	V <sub>DD</sub> ≥V <sub>IT</sub> _ +0.2 V,	15	25	37	
<sup>t</sup> d	Delay time	TPS3823/4/5/8	See timing diagram	120	200	300	ms
Propagation (delay) time,  tPHL high-to-low-level output		MR to RESET delay (TPS3820/3/5/8)	V <sub>DD</sub> ≥V <sub>IT</sub> +0.2 V, V <sub>IL</sub> =0.3 x V <sub>DD</sub> , V <sub>IH</sub> =0.7 x V <sub>DD</sub>			0.1	μs
	nigri-to-iow-ievel output	V <sub>DD</sub> to RESET delay	V <sub>IL</sub> = V <sub>IT-</sub> - 0.2 V, V <sub>IH</sub> = V <sub>IT-</sub> + 0.2 V			25	·
tPLH	Propagation (delay) time,	MR to RESET delay (TPS3824/5)	V <sub>DD</sub> ≥V <sub>IT</sub> _ +0.2 V, V <sub>IL</sub> =0.3 x V <sub>DD</sub> , V <sub>IH</sub> =0.7 x V <sub>DD</sub>			0.1	μs
	low-to-high-level output	V <sub>DD</sub> to RESET delay (TPS3824/5)	V <sub>IL</sub> = V <sub>IT-</sub> - 0.2 V, V <sub>IH</sub> = V <sub>IT-</sub> + 0.2 V			25	

### **TYPICAL CHARACTERISTICS**

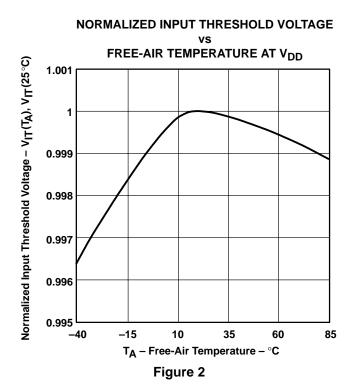


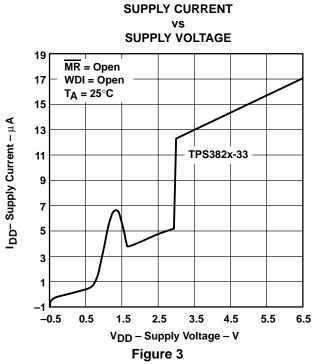

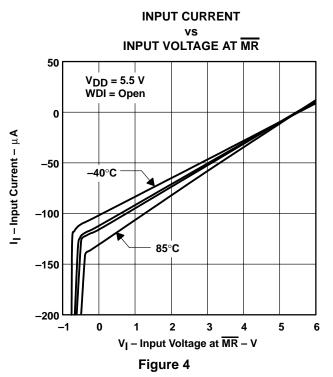


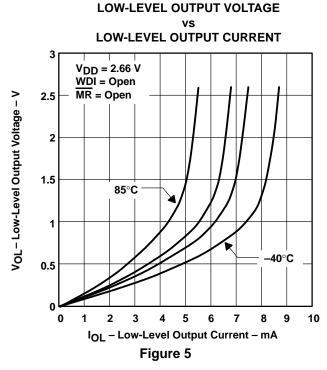

### **TYPICAL CHARACTERISTICS**

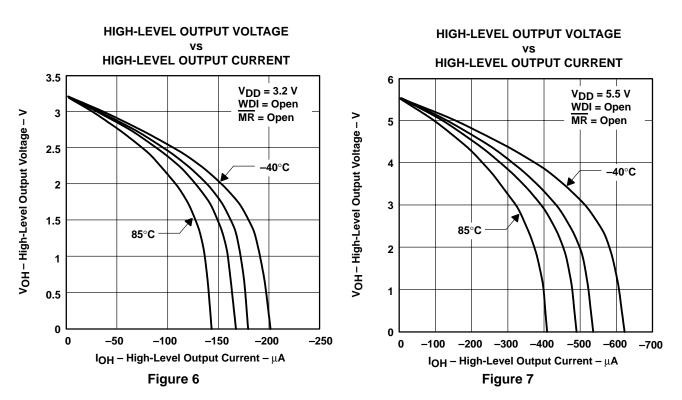

### MINIMUM PULSE DURATION AT $V_{DD}$

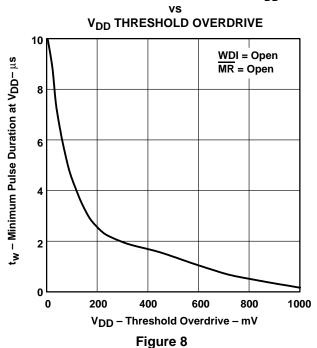


SLVS165E - APRIL 1998 - REVISED DECEMBER 2002

### **MECHANICAL DATA**

### DBV (R-PDSO-G5)

### PLASTIC SMALL-OUTLINE PACKAGE

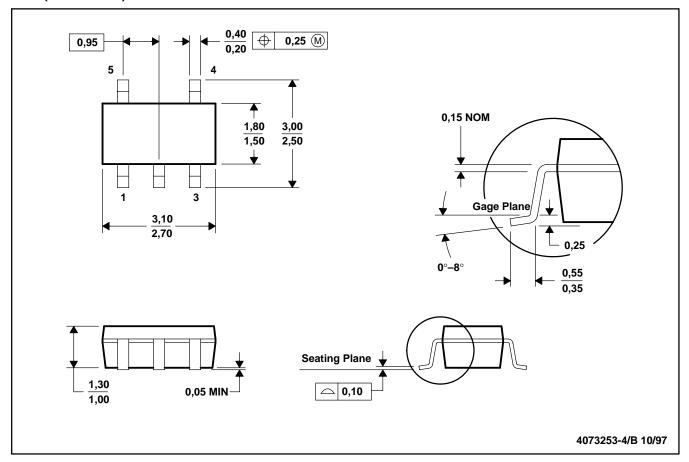

NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions include mold flash or protrusion.



### **PACKAGING INFORMATION**

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
TPS3820-33DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TPS3820-33DBVRG4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TPS3820-33DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3820-33DBVTG4	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3820-50DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3820-50DBVRG4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3820-50DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3820-50DBVTG4	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3823-25DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3823-25DBVRG4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3823-25DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3823-30DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3823-30DBVRG4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3823-30DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3823-30DBVTG4	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3823-33DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3823-33DBVRG4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3823-33DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3823-33DBVTG4	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3823-50DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3823-50DBVRG4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3823-50DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3823-50DBVTG4	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3824-25DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3824-25DBVRG4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR





om 4-Mar-2005

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
TPS3824-25DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3824-30DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3824-30DBVRG4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3824-30DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3824-30DBVTG4	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3824-33DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3824-33DBVRG4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3824-33DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3824-50DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3824-50DBVRG4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3824-50DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3824-50DBVTG4	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3825-33DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3825-33DBVRG4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3825-33DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3825-33DBVTG4	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3825-50DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3825-50DBVRG4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3825-50DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3825-50DBVTG4	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3828-33DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3828-33DBVRG4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TPS3828-33DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3828-33DBVTG4	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3828-50DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3828-50DBVRG4	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR



### PACKAGE OPTION ADDENDUM

4-Mar-2005

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins I	Package Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
TPS3828-50DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
TPS3828-50DBVTG4	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - May not be currently available - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

None: Not yet available Lead (Pb-Free).

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Green (RoHS & no Sb/Br): TI defines "Green" to mean "Pb-Free" and in addition, uses package materials that do not contain halogens, including bromine (Br) or antimony (Sb) above 0.1% of total product weight.


(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDECindustry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

### DBV (R-PDSO-G5)

### PLASTIC SMALL-OUTLINE PACKAGE

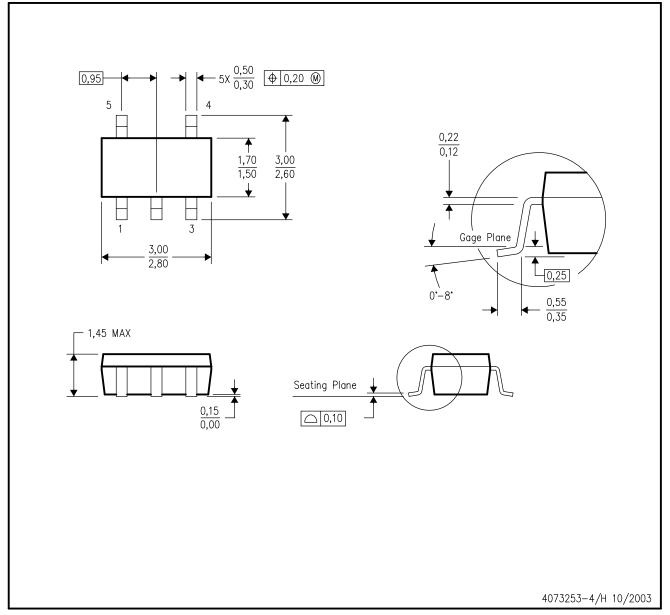

NOTES:

- All linear dimensions are in millimeters.
- This drawing is subject to change without notice.
- C. Body dimensions do not include mold fla D. Falls within JEDEC MO—178 Variation AA. Body dimensions do not include mold flash or protrusion.



#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments

Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated