
SCLS470A - MARCH 2003 - REVISED OCTOBER 2003


- Wide Operating Voltage Range of 2 V to 6 V
- Low Input Current of 1 μA Max
- High-Current Outputs Drive Up To 10 LSTTL Loads

SN54HC109 . . . J OR W PACKAGE SN74HC109 . . . D, N, OR NS PACKAGE (TOP VIEW)



- Low Power Consumption, 40-μA Max I_{CC}
- Typical t_{pd} = 12 ns
- ±4-mA Output Drive at 5 V

SN54HC109 . . . FK PACKAGE (TOP VIEW)



NC - No internal connection

description/ordering information

These devices contain two independent J- \overline{K} positive-edge-triggered flip-flops. A low level at the preset (\overline{PRE}) or clear (\overline{CLR}) inputs sets or resets the outputs, regardless of the levels of the other inputs. When \overline{PRE} and \overline{CLR} are inactive (high), data at the J and \overline{K} inputs meeting the setup-time requirements are transferred to the outputs on the positive-going edge of the clock (CLK) pulse. Clock triggering occurs at a voltage level and is not related directly to the rise time of the clock pulse. Following the hold-time interval, data at the J and \overline{K} inputs can be changed without affecting the levels at the outputs. These versatile flip-flops can perform as toggle flip-flops by grounding \overline{K} and tying J high. They also can perform as D-type flip-flops if J and \overline{K} are tied together.

ORDERING INFORMATION

TA	PACKAGET		ORDERABLE PART NUMBER	TOP-SIDE MARKING
	PDIP – N	Tube of 25	SN74HC109N	SN74HC109N
		Tube of 40	SN74HC109D	
-40°C to 85°C	SOIC - D	Reel of 2500	SN74HC109DR	HC109
		Reel of 250	SN74HC109DT	
	SOP - NS	Reel of 2000	SN74HC109NSR	HC109
	CDIP – J	Tube of 25	SNJ54HC109J	SNJ54HC109J
-55°C to 125°C	CFP – W	Tube of 150	SNJ54HC109W	SNJ54HC109W
	LCCC – FK	Tube of 55	SNJ54HC109FK	SNJ54HC109FK

[†] Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



1


SCLS470A - MARCH 2003 - REVISED OCTOBER 2003

FUNCTION TABLE

		INPUTS			OUTI	PUTS
PRE	CLR	CLK	J	K	Q	Q
L	Н	Х	Χ	Х	Н	L
Н	L	X	Χ	Χ	L	Н
L	L	Χ	Χ	Χ	H [†]	H [†]
Н	Н	\uparrow	L	L	L	Н
Н	Н	\uparrow	Н	L	Tog	ggle
Н	Н	\uparrow	L	Н	Q0	Q ₀
Н	Н	\uparrow	Н	Н	Н	L
Н	Н	L	Χ	X	Q0	Q ₀

[†] This configuration is nonstable; that is, it does not persist when either PRE or CLR returns to its inactive (high) level.

logic diagram, each flip-flop (positive logic)

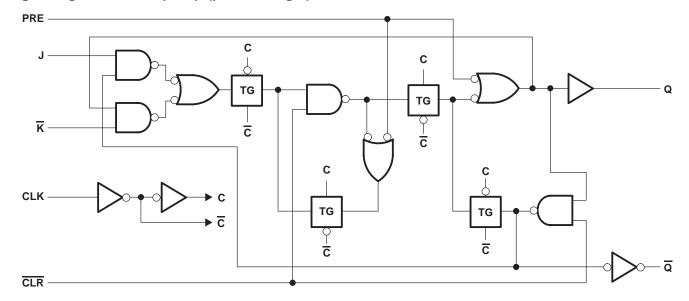



SN54HC109, SN74HC109 DUAL J-K POSITIVE-EDGE-TRIGGERED FLIP-FLOPS WITH CLEAR AND PRESET

SCLS470A - MARCH 2003 - REVISED OCTOBER 2003

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V _{CC}	0.5 V to 7 V
Input clamp current, I_{IK} ($V_I < 0$ or $V_I > V_{CC}$)	±20 mA
Output clamp current, I _{OK} (V _O < 0 or V _O > V _{CC})	±20 mA
Continuous output current, I_O ($V_O = 0$ to V_{CC})	±35 mA
Continuous current through V _{CC} or GND	±70 mA
Package thermal impedance, θ _{JA} (see Note 1): D package	73°C/W
N package	67°C/W
NS package	64°C/W
Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: FK, J, or W packages	300°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D, N, or NS packages	260°C
Storage temperature range, T _{stg}	-65°C to 150°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The package thermal impedance is calculated in accordance with JESD 51-7.

recommended operating conditions (see Note 2)

			SI	SN54HC109		SN	174HC10	9	LINUT
			MIN	NOM	MAX	MIN	NOM	MAX	UNIT
Vcc	Supply voltage		2	5	6	2	5	6	V
		V _{CC} = 2 V	1.5			1.5			
VIH	High-level input voltage	$V_{CC} = 4.5 \text{ V}$	3.15			3.15			V
		V _{CC} = 6 V	4.2			4.2			
	Low-level input voltage	V _{CC} = 2 V			0.3			0.5	
VIL		V _{CC} = 4.5 V			0.9			1.35	V
		VCC = 6 V			1.2			1.8	
VI	Input voltage		0		VCC	0		VCC	V
Vo	Output voltage		0		VCC	0		VCC	V
	Input transition rise/fall time	V _{CC} = 2 V			1000			1000	
Δt/Δν		V _{CC} = 4.5 V			500			500	ns
		VCC = 6 V			400			400	
TA	Operating free-air temperature	•	-55		125	-40		85	°C

NOTE 2: All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.



SN54HC109, SN74HC109 DUAL J-K POSITIVE-EDGE-TRIGGERED FLIP-FLOPS WITH CLEAR AND PRESET

SCLS470A - MARCH 2003 - REVISED OCTOBER 2003

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

				Т	A = 25°C	;	SN54H	IC109	SN74H	C109		
PARAMETER	TEST CONDITIONS		VCC	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT	
			2 V	1.9	1.998		1.9		1.9			
		$I_{OH} = -20 \mu A$	4.5 V	4.4	4.499		4.4		4.4			
Voн	VI = VIH or VIL		6 V	5.9	5.999		5.9		5.9		V	
		$I_{OH} = -4 \text{ mA}$	4.5 V	3.98	4.3		3.7		3.84			
		$I_{OH} = -5.2 \text{ mA}$	6 V	5.48	5.8		5.2		5.34			
	VI = VIH or VIL		2 V		0.002	0.1		0.1		0.1		
		$I_{OL} = 20 \mu A$	4.5 V		0.001	0.1		0.1		0.1		
VOL			6 V		0.001	0.1		0.1		0.1	V	
		I _{OL} = 4 mA	4.5 V		0.17	0.26		0.4		0.33		
			I _{OL} = 5.2	$I_{OL} = 5.2 \text{ mA}$	6 V		0.15	0.26		0.4		0.33
lį	$V_I = V_{CC}$ or 0		6 V		±0.1	±100		±1000		±1000	nA	
ICC	$V_I = V_{CC}$ or 0,	IO = 0	6 V			4		80		40	μΑ	
Ci			2 V to 6 V		3	10		10		10	pF	

timing requirements over recommended operating free-air temperature range (unless otherwise noted)

			\ ,	T _A =	25°C	SN54F	IC109	SN74H	IC109												
			VCC	MIN	MAX	MIN	MAX	MIN	MAX	UNIT											
			2 V		6		4.2		5												
fclock	Clock frequency		4.5 V		31		21		25	MHz											
			6 V		36		25		29												
			2 V	100		150		125													
		PRE or CLR low	4.5 V	20		30		25													
١.	Date a describer		6 V	17		25		21													
t _w	Pulse duration	CLK high or low	2 V	80		120		100		ns											
			4.5 V	16		24		20													
			6 V	14		20		17													
			2 V	100		150		125													
		Data (J, K)	4.5 V	20		30		25													
١.	0		6 V	17		25		21													
t _{su}	Setup time before CLK↑		2 V	25		40		30		ns											
		PRE or CLR inactive	4.5 V	5		8		6													
			6 V	4		7		5													
			2 V	0		0		0													
th	Hold time	Data after CLK↑	Data after CLK↑	Data after CLK↑	Data after CLK↑	Data after CLK↑	Data after CLK↑	Data after CLK↑	Data after CLK↑	Data after CLK↑	Data after CLK↑	Data after CLK↑	Data after CLK↑	4.5 V	0		0		0		ns
			6 V	0		0		0													

SN54HC109, SN74HC109 DUAL J-K POSITIVE-EDGE-TRIGGERED FLIP-FLOPS WITH CLEAR AND PRESET

SCLS470A - MARCH 2003 - REVISED OCTOBER 2003


switching characteristics over recommended operating free-air temperature range, C_L = 50 pF (unless otherwise noted) (see Figure 1)

242445	FROM	то	.,	T _A = 25°C		SN54H	IC109	SN74H	IC109		
PARAMETER	(INPUT)	(OUTPUT)	VCC	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
			2 V	6	10		4.2		5		
f _{max}			4.5 V	31	50		21		25		ns
			6 V	36	60		25		29		
			2 V		60	230		345		290	
	PRE or CLR CLK	_	4.5 V		15	46		69		58	
			6 V		12	39		59		49	
^t pd			2 V		50	175		250		220	ns
			4.5 V		15	35		50		44	
			6 V		12	30		42		37	
t _t			2 V		28	75		110		95	
	Q or \overline{Q}	Q or Q	4.5 V		8	15		22		19	ns
			6 V		6	13		19		16	


operating characteristics, $T_A = 25^{\circ}C$

	PARAMETER	TEST CONDITIONS	TYP	UNIT
(Power dissipation capacitance per buffer/driver	No load	35	pF


PARAMETER MEASUREMENT INFORMATION




PARAI	PARAMETER		CL	S 1	S2
	^t PZH	1 10	1 kΩ 50 pF 7		Closed
ten	tPZL	1 K22	or 150 pF	Closed	Open
.	tPHZ	1 kΩ	50 pF	Open	Closed
^t dis	t _{PLZ}	1 K22	1 kΩ 50 pF		Open
t _{pd} or	50 pF		Open	Open	



VOLTAGE WAVEFORMS
PROPAGATION DELAY AND OUTPUT TRANSITION TIMES





VOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES FOR 3-STATE OUTPUTS

- NOTES: A. C_L includes probe and test-fixture capacitance.
 - B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
 - C. Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: PRR \leq 1 MHz, Z_O = 50 Ω , t_f = 6 ns, t_f = 6 ns.
 - D. The outputs are measured one at a time with one input transition per measurement.
 - E. tpLZ and tpHZ are the same as tdis.
 - F. tpzL and tpzH are the same as ten.
 - G. tpLH and tpHL are the same as tpd.

Figure 1. Load Circuit and Voltage Waveforms



14 LEADS SHOWN




NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

W (R-GDFP-F16)

CERAMIC DUAL FLATPACK

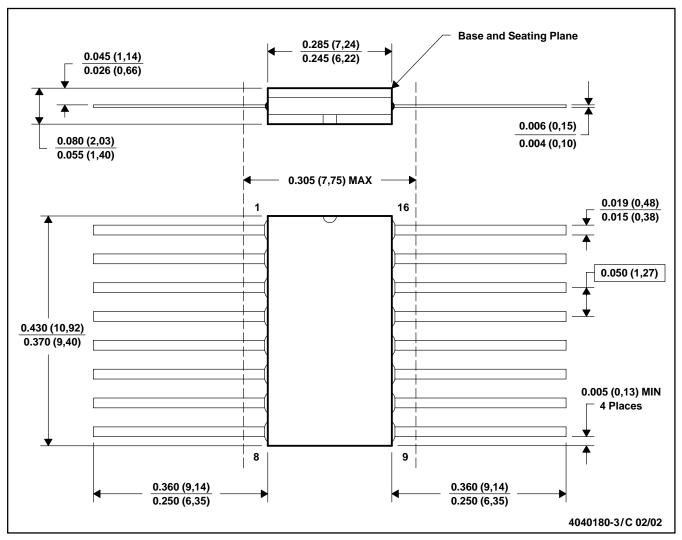


NOTES: A. All linear dimensions are in inches (millimeters).

- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only.
- E. Falls within MIL STD 1835 GDFP-1F16 and JEDEC MO-092AC

FK (S-CQCC-N**)

28 TERMINAL SHOWN

LEADLESS CERAMIC CHIP CARRIER

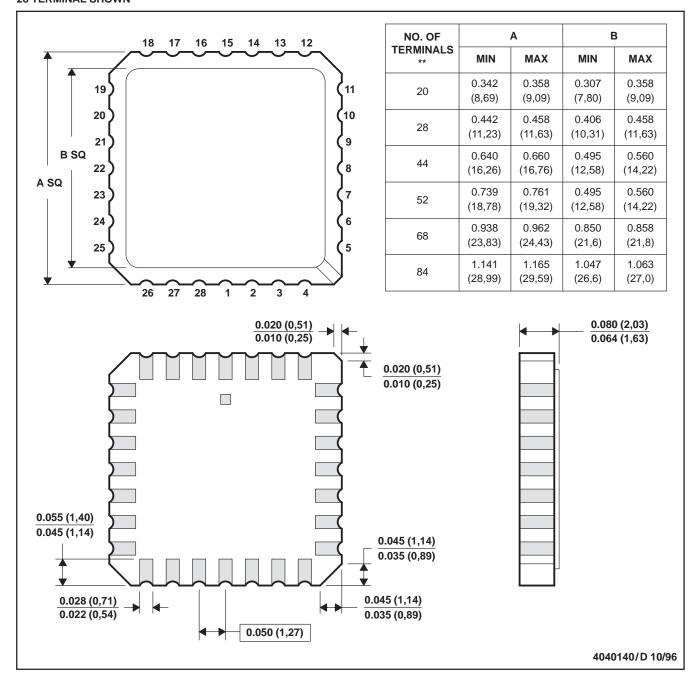


- NOTES: A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. This package can be hermetically sealed with a metal lid.
 - D. The terminals are gold plated.
 - E. Falls within JEDEC MS-004



N (R-PDIP-T**)

16 PINS SHOWN

PLASTIC DUAL-IN-LINE PACKAGE

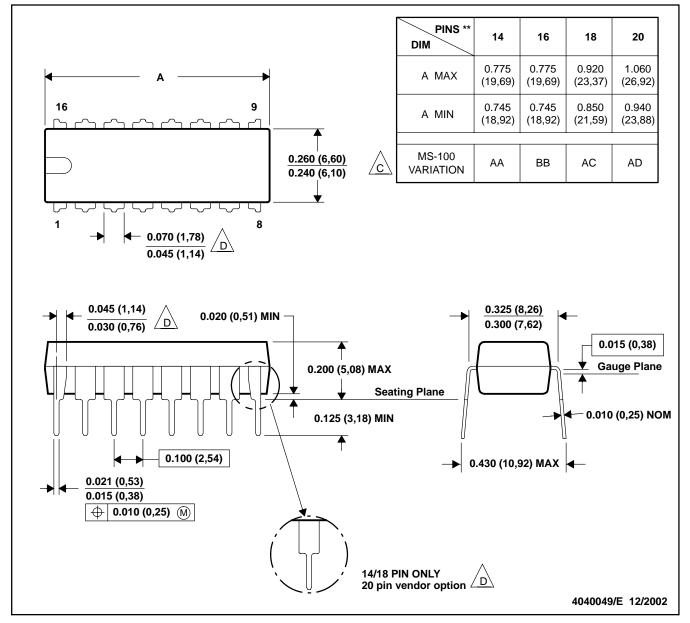

NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.


Falls within JEDEC MS-001, except 18 and 20 pin minimum body Irngth (Dim A).

The 20 pin end lead shoulder width is a vendor option, either half or full width.

D (R-PDSO-G**)

PLASTIC SMALL-OUTLINE PACKAGE

8 PINS SHOWN

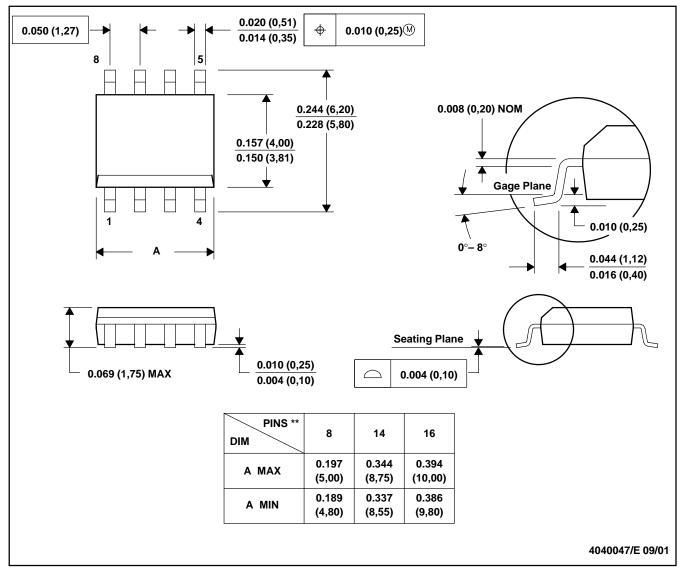

NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion, not to exceed 0.006 (0,15).

D. Falls within JEDEC MS-012

MECHANICAL DATA

NS (R-PDSO-G**)

14-PINS SHOWN

PLASTIC SMALL-OUTLINE PACKAGE



NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments

Post Office Box 655303 Dallas, Texas 75265

Copyright © 2003, Texas Instruments Incorporated