SCLS133E - DECEMBER 1982 - REVISED SEPTEMBER 2003


- 3-State Version of 'HC153
- Wide Operating Voltage Range of 2 V to 6 V
- High-Current Inverting Outputs Drive Up To 15 LSTTL Loads
- Low Power Consumption, 80-μA Max I_{CC}
- Typical t_{pd} = 9 ns
- ±6-mA Output Drive at 5 V
- Low Input Current of 1 μA Max
- Permit Multiplexing From n Lines to One Line
- Perform Parallel-to-Serial Conversion

description/ordering information


Each of these data selectors/multiplexers contains inverters and drivers to supply full binary decoding data selection to the AND-OR gates. Separate output-control inputs are provided for each of the two 4-line sections.

The 3-state outputs can interface with and drive data lines of bus-organized systems. With all but one of the common outputs disabled (in the high-impedance state), the low impedance of the single enabled output drives the bus line to a high or low logic level. Each output has its own output-enable (\overline{OE}) input. The outputs are disabled when their respective \overline{OE} is high.

SN54HC253 . . . J OR W PACKAGE SN74HC253 . . . D, DB, N, OR NS PACKAGE (TOP VIEW)



SN54HC253 . . . FK PACKAGE (TOP VIEW)



NC - No internal connection


ORDERING INFORMATION

| TA | PACKAGET | | ORDERABLE PART NUMBER | TOP-SIDE MARKING | | |
|----------------|-----------|--------------|--------------------------|-----------------------|--|--|
| | PDIP – N | Tube of 25 | SN74HC253N | SN74HC253N | | |
| | | Tube of 40 | SN74HC253D | | | |
| | SOIC - D | Reel of 2500 | SN74HC253DR | HC253 | | |
| -40°C to 85°C | | Reel of 250 | SN74HC253DT | MARKING SN74HC253N | | |
| | SOP - NS | Reel of 2000 | SN74HC253NSR | HC253 | | |
| | SSOP – DB | Reel of 2000 | SN74HC253DBR | HC253 | | |
| | CDIP – J | Tube of 25 | SNJ54HC253J | SNJ54HC253J | | |
| −55°C to 125°C | CFP – W | Tube of 150 | SNJ54HC253W | SNJ54HC253W | | |
| | LCCC – FK | Tube of 55 | SNJ54HC253FK | SNJ54HC253FK | | |

[†] Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



SN54HC253, SN74HC253 DUAL 4-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS SCL\$133E - DECEMBER 1982 - REVISED SEPTEMBER 2003


FUNCTION TABLE

| | INPUTS | | | | | | | | |
|------|--------|----|----|----|--------|----|---|--|--|
| SELE | ECT† | | DA | ŌĒ | OUTPUT | | | | |
| В | Α | C0 | C1 | C2 | C3 | OE | · | | |
| Х | Χ | Х | Χ | Χ | Χ | Н | Z | | |
| L | L | L | Χ | Χ | Χ | L | L | | |
| L | L | Н | Χ | Χ | Χ | L | Н | | |
| L | Н | Χ | L | Χ | Χ | L | L | | |
| L | Н | Χ | Н | Χ | Χ | L | Н | | |
| Н | L | Χ | Χ | L | Χ | L | L | | |
| Н | L | Χ | Χ | Н | Χ | L | Н | | |
| Н | Н | Х | Χ | Χ | L | L | L | | |
| Н | Н | Х | Χ | Χ | Н | L | Н | | |

 $[\]ensuremath{^{\dagger}}$ Select inputs A and B are common to both sections.

SCLS133E - DECEMBER 1982 - REVISED SEPTEMBER 2003

logic diagram (positive logic)

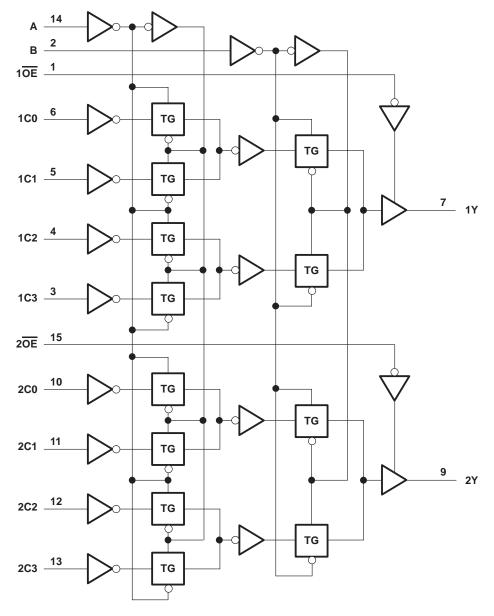

Pin numbers shown are for the D, DB, J, N, NS, and W packages.

SCLS133E - DECEMBER 1982 - REVISED SEPTEMBER 2003

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

| Supply voltage range, V _{CC} | | 0.5 | $V \ to \ 7 \ V$ |
|--|-----------------|--------|--------------------|
| Input clamp current, I_{IK} ($V_I < 0$ or $V_I > V_{CC}$) (see | ee Note 1) | | ±20 mA |
| Output clamp current, IOK (VO < 0 or VO > VCO | c) (see Note 1) | | ±20 mA |
| Continuous output current, I_O ($V_O = 0$ to V_{CC}) | - | | $\pm 25~\text{mA}$ |
| Continuous current through V _{CC} or GND | | | $\pm 50~\text{mA}$ |
| Package thermal impedance, θ _{JA} (see Note 2): | : D package | | 73°C/W |
| | DB package | | 82°C/W |
| | N package | | 67°C/W |
| | NS package | | 64°C/W |
| Storage temperature range, T _{stg} | | 65°C f | to 150°C |

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

2. The package thermal impedance is calculated in accordance with JESD 51-7.

recommended operating conditions (see Note 3)

| | | | SI | SN54HC253 | | SN | N74HC25 | i3 | | |
|-----------------|---------------------------------|-------------------------|------|-----------|------|------|---------|------|------|--|
| | | | MIN | NOM | MAX | MIN | NOM | MAX | UNIT | |
| Vcc | Supply voltage | | 2 | 5 | 6 | 2 | 5 | 6 | V | |
| | | V _{CC} = 2 V | 1.5 | | | 1.5 | | | | |
| VIH | High-level input voltage | V _{CC} = 4.5 V | 3.15 | | | 3.15 | | | V | |
| | | VCC = 6 V | 4.2 | | | 4.2 | | | | |
| | Low-level input voltage | V _{CC} = 2 V | | | 0.5 | | | 0.5 | V | |
| ٧ _{IL} | | V _{CC} = 4.5 V | | | 1.35 | | | 1.35 | | |
| | | V _{CC} = 6 V | | | 1.8 | | | 1.8 | | |
| ٧ı | Input voltage | | 0 | | VCC | 0 | | VCC | V | |
| VO | Output voltage | | 0 | | VCC | 0 | | VCC | V | |
| | | V _{CC} = 2 V | | | 1000 | | | 1000 | | |
| Δt/Δv | Input transition rise/fall time | V _{CC} = 4.5 V | | | 500 | | | 500 | ns | |
| | | V _{CC} = 6 V | | | 400 | | | 400 | | |
| TA | Operating free-air temperature | | -55 | | 125 | -40 | | 85 | °C | |

NOTE 3: All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.



SCLS133E - DECEMBER 1982 - REVISED SEPTEMBER 2003

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| | | | ., | Т | A = 25°C | ; | SN54H | C253 | SN74H | C253 | | | |
|-----------|-----------------------------------|----------------------------|------------|------|-------------|------|-------|-------|-------|-------|------|-----|--|
| PARAMETER | TEST CO | ONDITIONS | VCC | MIN | IIN TYP MAX | | MIN | MAX | MIN | MAX | UNIT | | |
| | | | 2 V | 1.9 | 1.998 | | 1.9 | | 1.9 | | | | |
| | | $I_{OH} = -20 \mu A$ | 4.5 V | 4.4 | 4.499 | | 4.4 | | 4.4 | 1.4 | | | |
| Vон | VI = VIH or VIL | | 6 V | 5.9 | 5.999 | | 5.9 | | 5.9 | | ٧ | | |
| | | $I_{OH} = -6 \text{ mA}$ | 4.5 V | 3.98 | 4.3 | | 3.7 | | 3.84 | | | | |
| | | $I_{OH} = -7.8 \text{ mA}$ | 6 V | 5.48 | 5.8 | | 5.2 | | 5.34 | | | | |
| | | | | | 2 V | | 0.002 | 0.1 | | 0.1 | | 0.1 | |
| | | $I_{OL} = 20 \mu A$ | 4.5 V | | 0.001 | 0.1 | | 0.1 | 0.1 | | | | |
| VoL | $V_I = V_{IH} \text{ or } V_{IL}$ | | 6 V | | 0.001 | 0.1 | | 0.1 | | 0.1 | V | | |
| | | I _{OL} = 6 mA | 4.5 V | | 0.17 | 0.26 | | 0.4 | | 0.33 | | | |
| | | $I_{OL} = 7.8 \text{ mA}$ | 6 V | | 0.15 | 0.26 | | 0.4 | | 0.33 | | | |
| lį | $V_I = V_{CC}$ or 0 | | 6 V | | ±0.1 | ±100 | | ±1000 | | ±1000 | nA | | |
| loz | VO = VCC or 0 | | 6 V | | ±0.01 | ±0.5 | | ±10 | | ±5 | μΑ | | |
| Icc | $V_I = V_{CC}$ or 0, | IO = 0 | 6 V | | | 8 | | 160 | | 80 | μΑ | | |
| Ci | | | 2 V to 6 V | | 3 | 10 | · | 10 | | 10 | pF | | |

switching characteristics over recommended operating free-air temperature range, C_L = 50 pF (unless otherwise noted) (see Figure 1)

| | FROM | то | ., | T, | 4 = 25°C | ; | SN54H | IC253 | SN74H | C253 | | |
|------------------|------------------|-------|-------|-------|----------|-----|-------|-------|-------|------|------|----|
| PARAMETER | (INPUT) (OUTPUT) | | vcc | MIN | TYP | MAX | MIN | MAX | MIN | MAX | UNIT | |
| | | | 2 V | | 62 | 150 | | 225 | | 190 | | |
| | A or B | Any Y | 4.5 V | | 19 | 30 | | 45 | | 38 | | |
| | | | 6 V | | 16 | 26 | | 38 | | 32 | | |
| ^t pd | | | 2 V | | 54 | 126 | | 210 | | 175 | ns | |
| | Data (Any C) | Υ | 4.5 V | | 16 | 28 | | 42 | | 35 | - | |
| | (/ tily O) | | 6 V | | 13 | 23 | | 36 | | 30 | | |
| | | | 2 V | | 28 | 100 | | 150 | | 125 | | |
| ^t en | ŌĒ | Υ | 4.5 V | | 11 | 20 | | 30 | | 25 | ns | |
| | | | 6 V | | 9 | 17 | | 26 | | 21 | | |
| | | | 2 V | | 21 | 135 | | 203 | | 170 | | |
| ^t dis | ŌĒ | Υ | 4.5 V | | 14 | 30 | | 45 | | 38 | ns | |
| | | | | 6 V | | 12 | 35 | | 38 | | 31 | |
| | | | 2 V | | 28 | 60 | | 90 | | 75 | · | |
| t _t | | | Υ | 4.5 V | | 8 | 12 | | 18 | | 15 | ns |
| | | | 6 V | | 6 | 10 | | 15 | | 13 | | |

SCLS133E - DECEMBER 1982 - REVISED SEPTEMBER 2003

switching characteristics over recommended operating free-air temperature range, C_L = 150 pF (unless otherwise noted) (see Figure 1)

| | FROM | то | ., | T | λ = 25°C | ; | SN54H | C253 | SN74H | IC253 | |
|-----------------|-------------------------|-------|------------|-----|----------|-----|-------|------|-------|-------|------|
| PARAMETER | AMETER (INPUT) (OUTPUT) | | VCC | MIN | TYP | MAX | MIN | MAX | MIN | MAX | UNIT |
| | | | 2 V | | 76 | 235 | | 355 | | 295 | |
| | A or B | Any Y | 4.5 V | | 23 | 47 | | 71 | | 59 | |
| | | | 6 V | | 20 | 41 | | 60 | | 51 | |
| ^t pd | | | 2 V | | 68 | 220 | | 335 | | 275 | ns |
| | Data (Any C) | Υ | 4.5 V | | 20 | 44 | | 67 | | 55 | |
| | (Ally O) | | 6 V | | 17 | 38 | | 57 | | 51 | |
| | | | 2 V | | 44 | 185 | | 280 | | 230 | |
| t _{en} | ŌĒ | Y | 4.5 V | | 16 | 37 | | 56 | | 46 | ns |
| - | | | 6 V | | 14 | 32 | | 48 | | 40 | |
| | | | 2 V | | 45 | 210 | | 315 | | 265 | |
| t _t | | Υ | Y 4.5 V 17 | 42 | | 63 | | 53 n | | | |
| | | | 6 V | | 13 | 36 | | 53 | | 45 | |


operating characteristics, $T_A = 25^{\circ}C$

| | | PARAMETER | TEST CONDITIONS | TYP | UNIT |
|---|-----------------|---|-----------------|-----|------|
| ĺ | C _{pd} | Power dissipation capacitance per multiplexer | No load | 45 | pF |




SCLS133E - DECEMBER 1982 - REVISED SEPTEMBER 2003


PARAMETER MEASUREMENT INFORMATION

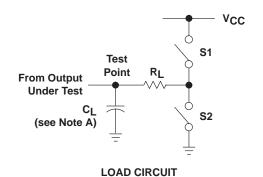


| PARAI | PARAMETER | | CL | S1 | S2 |
|--------------------|---|--------------|--------------|--------|--------|
| _ | tPZH | 1 k Ω | 50 pF | Open | Closed |
| ten | tPZL | 1 K22 | or 150 pF | Closed | Open |
| 4 | tPHZ | 1 kΩ | 50 pF | Open | Closed |
| ^t dis | tPLZ | 1 K22 | 50 pr | Closed | Open |
| t _{pd} or | t _{pd} or t _t 50 pF or 150 pF | | Open | Open | |

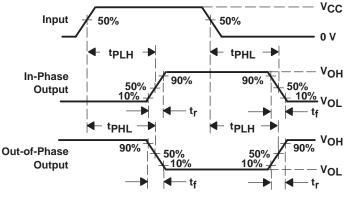

VOLTAGE WAVEFORMS
PROPAGATION DELAY AND OUTPUT TRANSITION TIMES

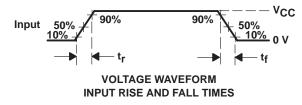

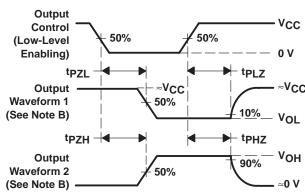

VOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES FOR 3-STATE OUTPUTS

- NOTES: A. C_L includes probe and test-fixture capacitance.
 - B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
 - C. Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: PRR \leq 1 MHz, Z_O = 50 Ω , t_f = 6 ns.
 - D. The outputs are measured one at a time with one input transition per measurement.
 - E. tpLZ and tpHZ are the same as tdis.
 - F. tpzL and tpzH are the same as ten.
 - G. tpLH and tpHL are the same as tpd.

Figure 1. Load Circuit and Voltage Waveforms



14 LEADS SHOWN




NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

FK (S-CQCC-N**)

28 TERMINAL SHOWN

LEADLESS CERAMIC CHIP CARRIER

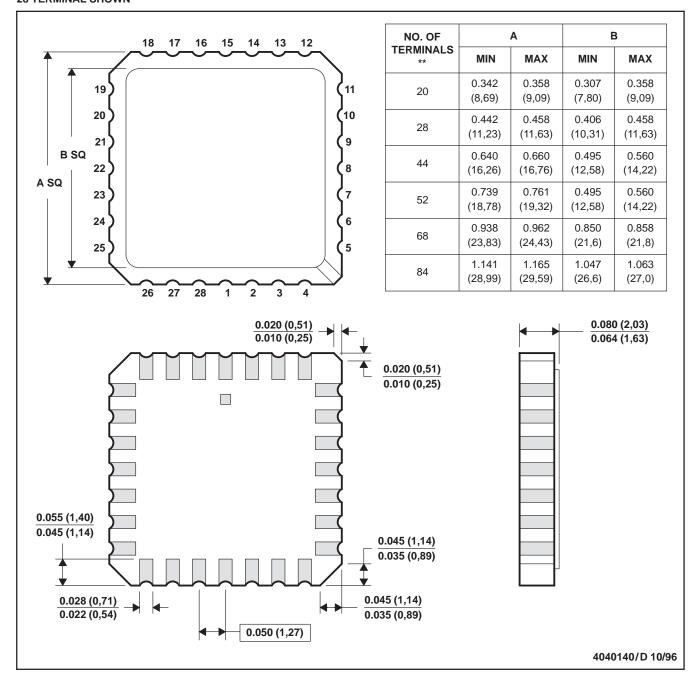


- NOTES: A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. This package can be hermetically sealed with a metal lid.
 - D. The terminals are gold plated.
 - E. Falls within JEDEC MS-004



N (R-PDIP-T**)

16 PINS SHOWN

PLASTIC DUAL-IN-LINE PACKAGE

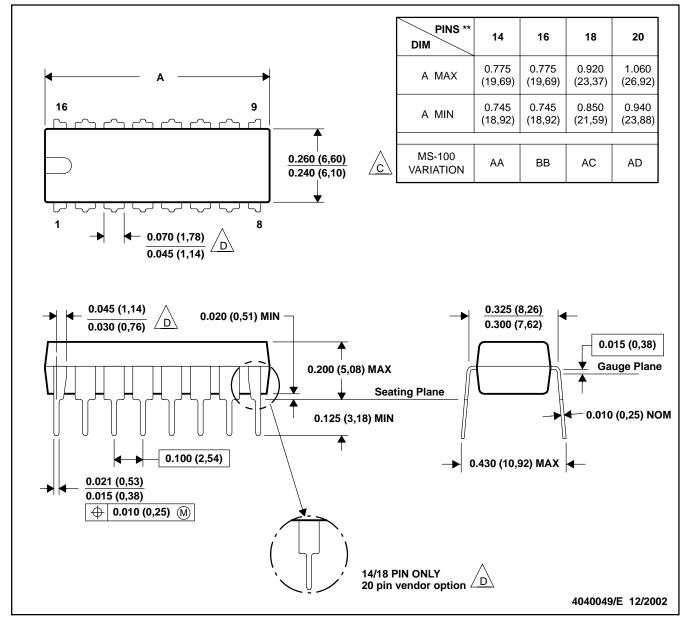

NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.


Falls within JEDEC MS-001, except 18 and 20 pin minimum body Irngth (Dim A).

The 20 pin end lead shoulder width is a vendor option, either half or full width.

D (R-PDSO-G**)

PLASTIC SMALL-OUTLINE PACKAGE

8 PINS SHOWN

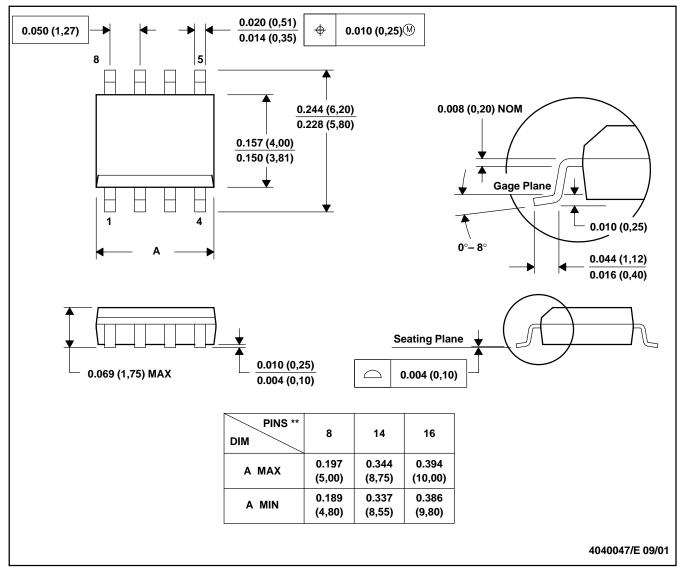

NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion, not to exceed 0.006 (0,15).

D. Falls within JEDEC MS-012

MECHANICAL DATA

NS (R-PDSO-G**)

14-PINS SHOWN

PLASTIC SMALL-OUTLINE PACKAGE



NOTES:


- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



DB (R-PDSO-G**)

PLASTIC SMALL-OUTLINE

28 PINS SHOWN

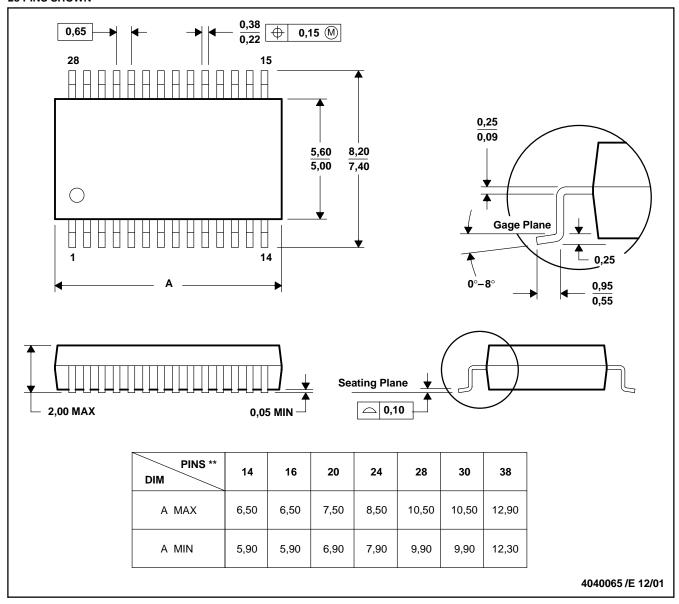

NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-150

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| Products | | Applications | |
|------------------|------------------------|--------------------|---------------------------|
| Amplifiers | amplifier.ti.com | Audio | www.ti.com/audio |
| Data Converters | dataconverter.ti.com | Automotive | www.ti.com/automotive |
| DSP | dsp.ti.com | Broadband | www.ti.com/broadband |
| Interface | interface.ti.com | Digital Control | www.ti.com/digitalcontrol |
| Logic | logic.ti.com | Military | www.ti.com/military |
| Power Mgmt | power.ti.com | Optical Networking | www.ti.com/opticalnetwork |
| Microcontrollers | microcontroller.ti.com | Security | www.ti.com/security |
| | | Telephony | www.ti.com/telephony |
| | | Video & Imaging | www.ti.com/video |
| | | Wireless | www.ti.com/wireless |

Mailing Address: Texas Instruments

Post Office Box 655303 Dallas, Texas 75265

Copyright © 2003, Texas Instruments Incorporated