

November 1988 Revised November 1999

74AC540

Octal Buffer/Line Driver with 3-STATE Outputs

General Description

The AC540 is an octal buffer/line drivers designed to be employed as memory and address drivers, clock drivers and bus oriented transmitter/receivers.

These devices are similar in function to the AC240 while providing flow-through architecture (inputs on opposite side from outputs). This pinout arrangement makes these devices especially useful as output ports for microprocessors, allowing ease of layout and greater PC board density.

Features


- I_{CC} and I_{OZ} reduced by 50%
- 3-STATE inverting outputs
- Inputs and outputs opposite side of package, allowing easier interface to microprocessors
- Output source/sink 24 mA

Ordering Code:


Order Number	Package Number	Package Description			
74AC540SC	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide Body			
74AC540SJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide			
74AC540MTC	MTC20	20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide			
74AC540PC	N20A	20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide			

Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.

Logic Symbol



Connection Diagram



Truth Table

	Outmute		
OE ₁	OE ₂	ı	Outputs
L	L	Н	L
Н	Χ	Χ	Z
Х	Н	X	Z
L	L	L	Н

H = HIGH Voltage Level L = LOW Voltage Level X = Immaterial Z = High Impedance

FACT™ is a trademark of Fairchild Semiconductor Corporation.

Absolute Maximum Ratings(Note 1)

Recommended Operating Conditions

Supply Voltage (V _{CC})	-0.5V to +7.0V
DC Input Diode Current (I _{IK})	

 $\begin{array}{c} \text{V}_{\text{I}} = -0.5 \text{V} & -20 \text{ mA} \\ \\ \text{V}_{\text{I}} = \text{V}_{\text{CC}} + 0.5 \text{V} & +20 \text{ mA} \\ \\ \text{DC Input Voltage (V_{\text{I}})} & -0.5 \text{V to V}_{\text{CC}} + 0.5 \text{V} \\ \end{array}$

DC Output Diode Current (I_{OK})

 $\begin{aligned} & \text{V}_{\text{O}} = -0.5 \text{V} & -20 \text{ mA} \\ & \text{V}_{\text{O}} = \text{V}_{\text{CC}} + 0.5 \text{V} & +20 \text{ mA} \\ & \text{DC Output Voltage (V}_{\text{O}}) & -0.5 \text{V to V}_{\text{CC}} + 0.5 \text{V} \end{aligned}$

DC Output Source

or Sink Current (I_O) ± 50 mA

DC V_{CC} or Ground Current

per Output Pin (I_{CC} or I_{GND}) $\pm 50 \text{ mA}$

Storage Temperature (T_{STG}) $-65^{\circ}C$ to $+150^{\circ}C$

Junction Temperature (T_J)

PDIP 140°C

 V_{IN} from 30% to 70% of V_{CC} V_{CC} @ 3.3V, 4.5V, 5.5V

Note 1: Absolute maximum ratings are those values beyond which damage to the device may occur. The databook specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Fairchild does not recommend operation of FACT™ circuits outside databook specifications.

DC Electrical Characteristics

Symbol	Parameter	V _{CC}	$T_A = +25^{\circ}C$ $T_A = -40^{\circ} C \text{ to } +85^{\circ}$ Typ Guaranteed Limits		$T_A = -40^{\circ} \text{ C to } +85^{\circ}\text{C}$	Units	Conditions
Symbol	Farameter	(V)			aranteed Limits	Ullits	Conditions
V _{IH}	Minimum HIGH Level	3.0	1.5	2.1	2.1		V _{OUT} = 0.1V
	Input Voltage	4.5	2.25	3.15	3.15	V	or V _{CC} – 0.1V
		5.5	2.75	3.85	3.85		
V _{IL}	Maximum LOW Level	3.0	1.5	0.9	0.9		V _{OUT} = 0.1V
	Input Voltage	4.5	2.25	1.35	1.35	V	or V _{CC} - 0.1V
		5.5	2.75	1.65	1.65		
V _{OH}	Minimum HIGH Level	3.0	2.99	2.9	2.9		
	Output Voltage	4.5	4.49	4.4	4.4	V	$I_{OUT} = -50 \mu A$
		5.5	5.49	5.4	5.4		
							$V_{IN} = V_{IL}$ or V_{IH}
		3.0		2.56	2.46		$I_{OH} = -12 \text{ mA}$
		4.5		3.86	3.76	V	$I_{OH} = -24 \text{ mA}$
		5.5		4.86	4.76		$I_{OH} = -24 \text{ mA (Note 2)}$
V _{OL}	Maximum LOW Level	3.0	0.002	0.1	0.1		
	Output Voltage	4.5	0.001	0.1	0.1	V	$I_{OUT} = 50 \mu A$
		5.5	0.001	0.1	0.1		
							$V_{IN} = V_{IL}$ or V_{IH}
		3.0		0.36	0.44		$I_{OL} = 12 \text{ mA}$
		4.5		0.36	0.44	V	$I_{OL} = 24 \text{ mA}$
		5.5		0.36	0.44		I _{OL} = 24 mA (Note 2)
I _{IN}	Maximum Input	5.5		±0.1	±1.0	μА	$V_I = V_{CC}$, GND
(Note 4)	Leakage Current	5.5		±0.1	±1.0	μΑ	VI = VCC, GIVD
I _{OZ}	Maximum 3-STATE						V_{I} (OE) = V_{IL} , V_{IH}
	Current	5.5		±0.25	±2.5	μΑ	$V_I = V_{CC}$, GND
							$V_O = V_{CC}$, GND
I _{OLD}	Minimum Dynamic	5.5			75	mA	V _{OLD} = 1.65V Max
I _{OHD}	Output Current (Note 3)	5.5			-75	mA	V _{OHD} = 3.85V Min
I _{CC}	Maximum Quiescent	5.5		4.0	40.0	μА	$V_{IN} = V_{CC}$
(Note 4)	Supply Current	5.5		4.0	40.0	μΑ	or GND

Note 2: All outputs loaded; thresholds on input associated with output under test.

Note 3: Maximum test duration 2.0 ms, one output loaded at a time.

Note 4: I_{IN} and I_{CC} @ 3.0V are guaranteed to be less than or equal to the respective limit @ 5.5V V_{CC} .


AC Electrical Characteristics

	Parameter	V _{CC}	$T_A = +25$ °C $C_L = 50 \text{ pF}$			$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$ $C_L = 50 \text{ pF}$		Units
Symbol		(V)						
		(Note 5)	Min	Тур	Max	Min	Max	
t _{PLH}	Propagation Delay	3.3	1.5	5.5	7.5	1.0	8.0	no
	Data to Output	5.0	1.5	4.0	6.0	1.0	6.5	ns
t _{PHL}	Propagation Delay	3.3	1.5	5.0	7.0	1.0	7.5	ns
	Data to Output	5.0	1.5	4.0	5.5	1.0	6.0	
t _{PZH}	Output Enable Time	3.3	3.0	8.5	11.0	2.5	12.0	
		5.0	2.0	6.5	8.5	2.0	9.5	ns ns
t _{PZL}	Output Enable Time	3.3	2.5	7.5	10.0	2.0	11.0	no
		5.0	2.0	6.0	7.5	1.5	8.5	ns
t _{PHZ}	Output Disable Time	3.3	2.5	8.5	13.0	1.5	14.0	no
		5.0	1.5	7.5	10.5	1.0	11.0	ns
t _{PLZ}	Output Disable Time	3.3	2.5	7.0	10.0	2.0	11.0	
		5.0	1.5	6.0	8.0	1.5	9.0	ns


Note 5: Voltage Range 3.3 is 3.3V ± 0.3V Voltage Range 5.0 is 5.0V ± 0.5V


Capacitance


Symbol	ymbol Parameter		Units	Conditions
C _{IN}	Input Capacitance	4.5	pF	V _{CC} = OPEN
C _{PD}	Power Dissipation Capacitance	30.0	pF	$V_{CC} = 5.0V$

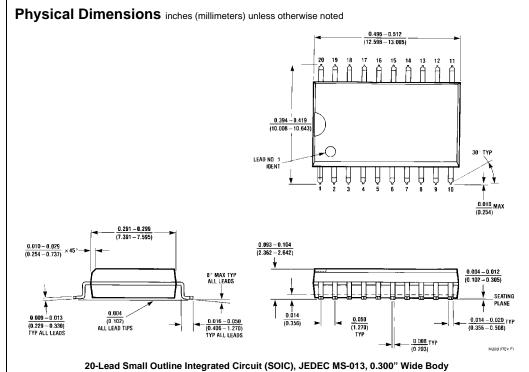

20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide Body Package Number M20B

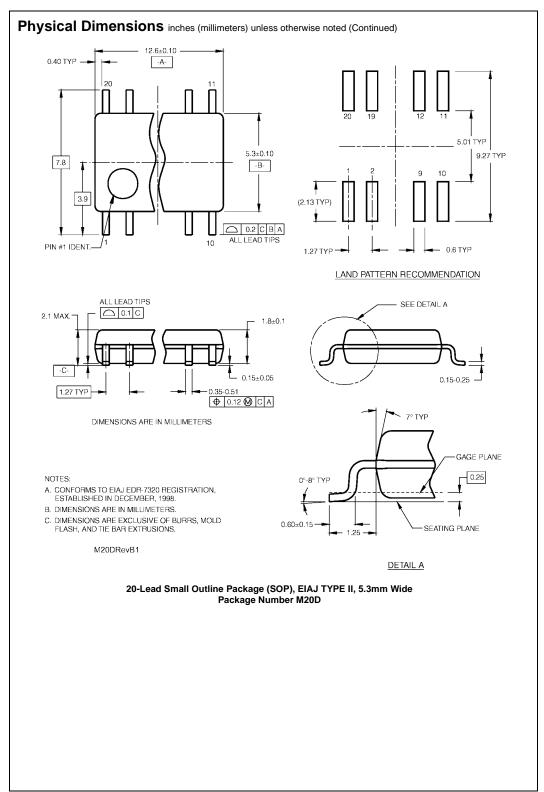

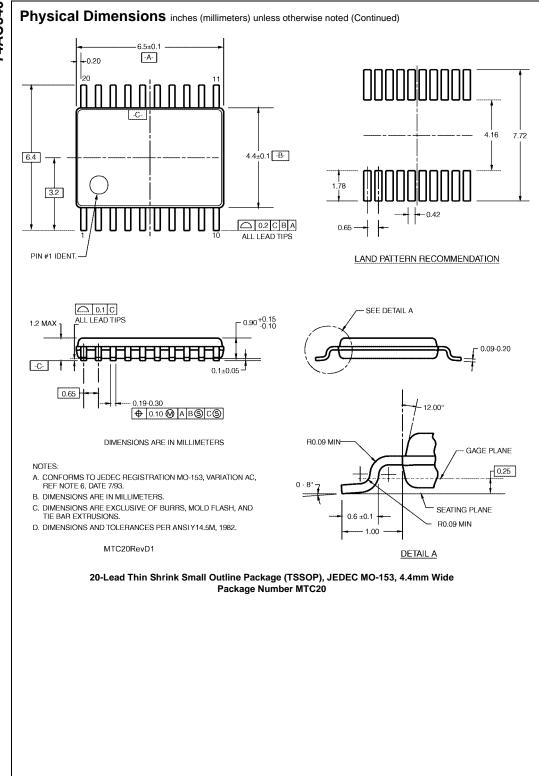

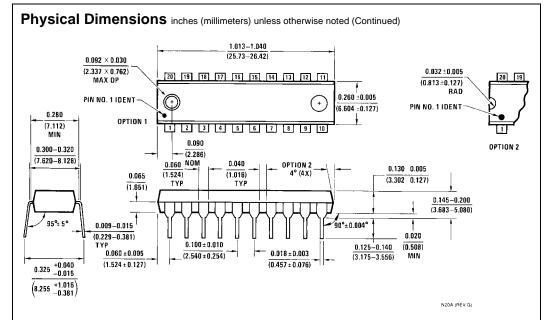

20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide Package Number N20A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com