

- Wide Operating Voltage Range of 2 V to 6 V
- Outputs Can Drive Up To 10 LSTTL Loads
- Low Power Consumption, 20-μA Max I<sub>CC</sub>

SN54HC04 . . . J OR W PACKAGE SN74HC04 . . . D, N, NS, OR PW PACKAGE (TOP VIEW)



- Typical t<sub>pd</sub> = 8 ns
- ±4-mA Output Drive at 5 V
- Low Input Current of 1 μA Max

# SN54HC04 . . . FK PACKAGE (TOP VIEW)



NC - No internal connection

## description/ordering information

The 'HC04 devices contain six independent inverters. They perform the Boolean function  $Y = \overline{A}$  in positive logic.

#### ORDERING INFORMATION

TA	PACKAGE†		ORDERABLE PART NUMBER	TOP-SIDE MARKING
	PDIP – N	Tube of25	SN74HC04N	SN74HC04N
		Tube of 50	SN74HC04D	
	SOIC - D	Reel of 2500	SN74HC04DR	HC04
–40°C to 85°C		Reel of 250	SN74HC04DT	
	SOP - NS	Reel of 2000	SN74HC04NSR	HC04
		Tube of 90	SN74HC04PW	
	TSSOP – PW	Reel of 2000	SN74HC04PWR	HC04
		Reel of 250	SN74HC04PWT	
	CDIP – J	Tube of 25	SNJ54HC04J	SNJ54HC04J
–55°C to 125°C	CFP – W	Tube of 150	SNJ54HC04W	SNJ54HC04W
	LCCC – FK	Tube of 55	SNJ54HC04FK	SNJ54HC04FK


<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

# FUNCTION TABLE (each inverter)

	,
INPUT	OUTPUT
Α	Y
Н	L
L	н



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



### logic diagram (positive logic)



## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V <sub>CC</sub>		0.5 V to 7 V
Input clamp current, I <sub>IK</sub> (V <sub>I</sub> < 0 or V <sub>I</sub> > V <sub>CC</sub> ) (see	ee Note 1)	±20 mA
Output clamp current, I <sub>OK</sub> (V <sub>O</sub> < 0 or V <sub>O</sub> > V <sub>CO</sub>	c) (see Note 1)	±20 mA
Continuous output current, $I_O(V_O = 0 \text{ to } V_{CC})$	- 	±25 mA
Continuous current through V <sub>CC</sub> or GND		±50 mA
Package thermal impedance, $\theta_{JA}$ (see Note 2):	: D package	86°C/W
	N package	80°C/W
	NS package	76°C/W
	PW package	113°C/W
Storage temperature range, T <sub>stg</sub>		–65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

#### recommended operating conditions (see Note 3)

			S	N54HC0	4	SN74HC04			UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	UNIT
VCC	Supply voltage		2	5	6	2	5	6	V
		V <sub>CC</sub> = 2 V	1.5			1.5			
$V_{IH}$	High-level input voltage	V <sub>CC</sub> = 4.5 V	3.15			3.15			V
		V <sub>CC</sub> = 6 V	4.2			4.2			
	Low-level input voltage	V <sub>CC</sub> = 2 V			0.5			0.5	V
VIL		V <sub>CC</sub> = 4.5 V			1.35			1.35	
		V <sub>CC</sub> = 6 V			1.8			1.8	
٧ <sub>I</sub>	Input voltage		0		VCC	0		VCC	V
Vo	Output voltage		0		VCC	0		VCC	V
		V <sub>CC</sub> = 2 V			1000			1000	
Δt/Δν	Input transition rise/fall time	V <sub>CC</sub> = 4.5 V			500			500	ns
		V <sub>CC</sub> = 6 V			400			400	
TA	Operating free-air temperature		-55		125	-40		85	°C

NOTE 3: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.



NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>2.</sup> The package thermal impedance is calculated in accordance with JESD 51-7.

# electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

DADAMETED	TEST CONDITIONS		V	Т	A = 25°C	;	SN54HC04		SN74HC04			
PARAMETER			vcc	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT	
			2 V	1.9	1.998		1.9		1.9			
		$I_{OH} = -20 \mu A$	4.5 V	4.4	4.499		4.4		4.4			
Voн	VI = VIH or VIL		6 V	5.9	5.999		5.9		5.9		V	
		$I_{OH} = -4 \text{ mA}$	4.5 V	3.98	4.3		3.7		3.84			
		$I_{OH} = -5.2 \text{ mA}$	6 V	5.48	5.8		5.2		5.34			
		I <sub>OL</sub> = 20 μA	2 V		0.002	0.1		0.1		0.1		
	$V_I = V_{IH}$ or $V_{IL}$		4.5 V		0.001	0.1		0.1		0.1		
VOL			6 V		0.001	0.1		0.1		0.1	V	
		$I_{OL} = 4 \text{ mA}$	4.5 V		0.17	0.26		0.4		0.33		
				$I_{OL} = 5.2 \text{ mA}$	6 V		0.15	0.26		0.4		0.33
lį	$V_I = V_{CC}$ or 0		6 V		±0.1	±100		±1000		±1000	nA	
Icc	$V_I = V_{CC}$ or 0,	I <sub>O</sub> = 0	6 V			2		40		20	μΑ	
C <sub>i</sub>			2 V to 6 V		3	10		10		10	pF	


# switching characteristics over recommended operating free-air temperature range, $C_L$ = 50 pF (unless otherwise noted) (see Figure 1)

PARAMETER	PARAMETER FROM TO		Vaa	T <sub>A</sub> = 25°C		SN54HC04		SN74HC04		UNIT							
PARAMETER	(INPUT) (OUTPUT)	Vcc	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT							
	А	Y	2 V		45	95		145		120							
t <sub>pd</sub>			4.5 V		9	19		29		24	ns						
					_		6 V		8	16		25		20			
	t <sub>t</sub> Y		2 V		38	75		110		95							
t <sub>t</sub>		Y	Y	Υ	Υ	Υ	Υ	Υ	4.5 V		8	15		22		19	ns
				6 V		6	13		19		16						

# operating characteristics, $T_A = 25^{\circ}C$

	PARAMETER	TEST CONDITIONS	TYP	UNIT
C <sub>pd</sub>	Power dissipation capacitance per inverter	No load	20	pF

#### PARAMETER MEASUREMENT INFORMATION

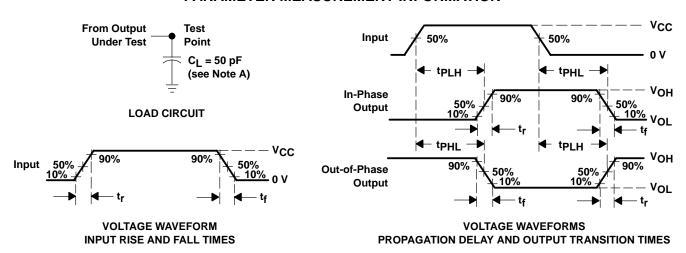

NOTES: A. C<sub>L</sub> includes probe and test-fixture capacitance.

- B. Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O = 50 \Omega$ ,  $t_f = 6$  ns,  $t_f = 6$  ns.
- C. The outputs are measured one at a time with one input transition per measurement.
- D. tpLH and tpHL are the same as tpd.

Figure 1. Load Circuit and Voltage Waveforms









#### **PACKAGING INFORMATION**

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
5962-8409801VCA	ACTIVE	CDIP	J	14	1	None	Call TI	Level-NC-NC-NC
5962-8409801VDA	ACTIVE	CFP	W	14	1	None	Call TI	Level-NC-NC-NC
84098012A	ACTIVE	LCCC	FK	20	1	None	Call TI	Level-NC-NC-NC
8409801CA	ACTIVE	CDIP	J	14	1	None	Call TI	Level-NC-NC-NC
8409801DA	ACTIVE	CFP	W	14	1	None	Call TI	Level-NC-NC-NC
JM38510/65701B2A	ACTIVE	LCCC	FK	20	1	None	Call TI	Level-NC-NC-NC
JM38510/65701BCA	ACTIVE	CDIP	J	14	1	None	Call TI	Level-NC-NC-NC
JM38510/65701BDA	ACTIVE	CFP	W	14	1	None	Call TI	Level-NC-NC-NC
SN54HC04J	ACTIVE	CDIP	J	14	1	None	Call TI	Level-NC-NC-NC
SN74HC04D	ACTIVE	SOIC	D	14	50	Pb-Free (RoHS)	CU NIPDAU	Level-2-260C-1 YEAR/ Level-1-235C-UNLIM
SN74HC04DBR	ACTIVE	SSOP	DB	14	2000	Pb-Free (RoHS)	CU NIPDAU	Level-2-260C-1 YEAR/ Level-1-235C-UNLIM
SN74HC04DR	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74HC04DT	ACTIVE	SOIC	D	14	250	Pb-Free (RoHS)	CU NIPDAU	Level-2-260C-1 YEAR/ Level-1-235C-UNLIM
SN74HC04N	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	Level-NC-NC-NC
SN74HC04N3	OBSOLETE	PDIP	N	14		None	Call TI	Call TI
SN74HC04NSR	ACTIVE	SO	NS	14	2000	Pb-Free (RoHS)	CU NIPDAU	Level-2-260C-1 YEAR Level-1-235C-UNLIM
SN74HC04PW	ACTIVE	TSSOP	PW	14	90	Pb-Free (RoHS)	CU NIPDAU	Level-1-250C-UNLIM
SN74HC04PWLE	OBSOLETE	TSSOP	PW	14		None	Call TI	Call TI
SN74HC04PWR	ACTIVE	TSSOP	PW	14	2000	Pb-Free (RoHS)	CU NIPDAU	Level-1-250C-UNLIM
SN74HC04PWT	ACTIVE	TSSOP	PW	14	250	Pb-Free (RoHS)	CU NIPDAU	Level-1-250C-UNLIM
SNJ54HC04FK	ACTIVE	LCCC	FK	20	1	None	Call TI	Level-NC-NC-NC
SNJ54HC04J	ACTIVE	CDIP	J	14	1	None	Call TI	Level-NC-NC-NC
SNJ54HC04W	ACTIVE	CFP	W	14	1	None	Call TI	Level-NC-NC-NC
SNV54HC04J	ACTIVE	CDIP	J	14		None	Call TI	Call TI
SNV54HC04W	ACTIVE	CFP	W	14		None	Call TI	Call TI

<sup>&</sup>lt;sup>(1)</sup> The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

None: Not yet available Lead (Pb-Free).

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

<sup>(2)</sup> Eco Plan - May not be currently available - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.



#### PACKAGE OPTION ADDENDUM

8-Mar-2005

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean "Pb-Free" and in addition, uses package materials that do not contain halogens, including bromine (Br) or antimony (Sb) above 0.1% of total product weight.

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDECindustry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


#### 14 LEADS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

# W (R-GDFP-F14)

# CERAMIC DUAL FLATPACK

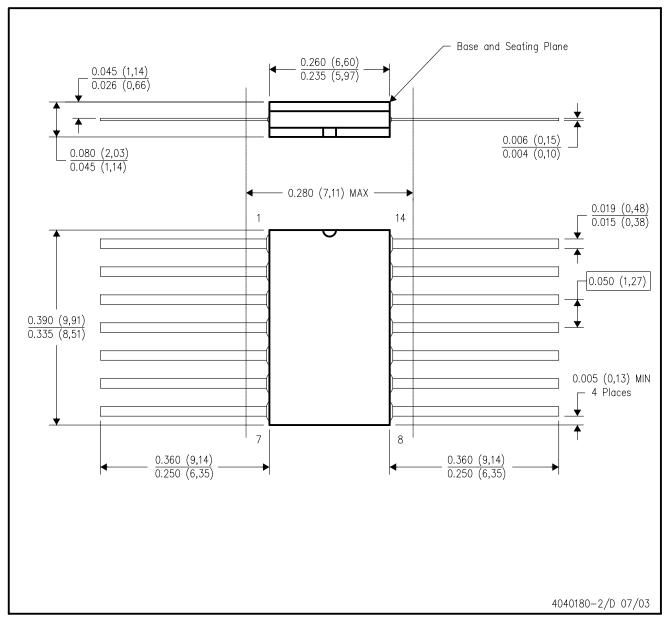

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only.
- E. Falls within MIL STD 1835 GDFP1-F14 and JEDEC MO-092AB



#### FK (S-CQCC-N\*\*)

#### **28 TERMINAL SHOWN**

#### **LEADLESS CERAMIC CHIP CARRIER**



NOTES: A. All linear dimensions are in inches (millimeters).

- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a metal lid.
- D. The terminals are gold plated.
- E. Falls within JEDEC MS-004



# N (R-PDIP-T\*\*)

# PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN




- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



# D (R-PDSO-G14)

# PLASTIC SMALL-OUTLINE PACKAGE

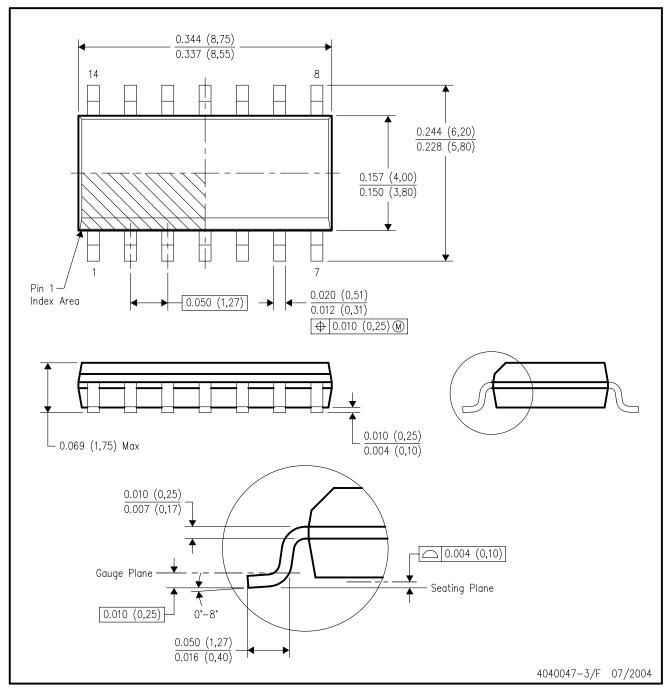

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MS-012 variation AB.



## **MECHANICAL DATA**

# NS (R-PDSO-G\*\*)

# 14-PINS SHOWN

#### PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



## DB (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE

#### **28 PINS SHOWN**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-150

## PW (R-PDSO-G\*\*)

#### 14 PINS SHOWN

## PLASTIC SMALL-OUTLINE PACKAGE



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-153

#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments

Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated