

April 1984 Revised March 2000

# DM74AS157 • DM74AS158 **Quad 1 of 2 Line Data Selector/Multiplexer**

### **General Description**

These data selectors/multiplexers contain inverters and drivers to supply full on-chip data selection to the four output gates. A separate STROBE input is provided. A 4-bit word is selected from one of two sources and is routed to the four outputs. The AS157 presents true data whereas the AS158 presents inverted data to minimize propagation delay time.

### **Features**


- Switching specifications at 50 pF
- Switching specifications guaranteed over full temperature and  $V_{\mbox{\footnotesize CC}}$  range
- Advanced oxide-isolated, ion-implanted Schottky TTL
- Functionally and pin for pin compatible with Schottky, low power Schottky, and advanced low power Schottky TTL counterpart
- Improved AC performance over Schottky, low power Schottky, and advanced low power Schottky counter-
- Expand any data input point
- Multiplex dual data buses
- General four functions of two variables (one variable is common)
- Source programmable counters

### **Ordering Code:**

Order Number	Package Number	Package Description
DM74AS157M	M16A	16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150 Narrow
DM74AS157SJX	M16D	16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
DM74AS157N	N16E	16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide
DM74AS158M	M16A	16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150 Narrow
DM74AS158N	N16E	16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.


### **Connection Diagram**



### **Function Table**

Inputs				Output Y			
STROBE	Select	Α	В	DM74AS157	DM74AS158		
Н	Х	Χ	Χ	L	Н		
L	L	L	Χ	L	Н		
L	L	Н	Χ	Н	L		
L	Н	Χ	L	L	Н		
L	Н	Χ	Н	Н	L		

- H = HIGH Level
- L = LOW Level
- X = Don't Care

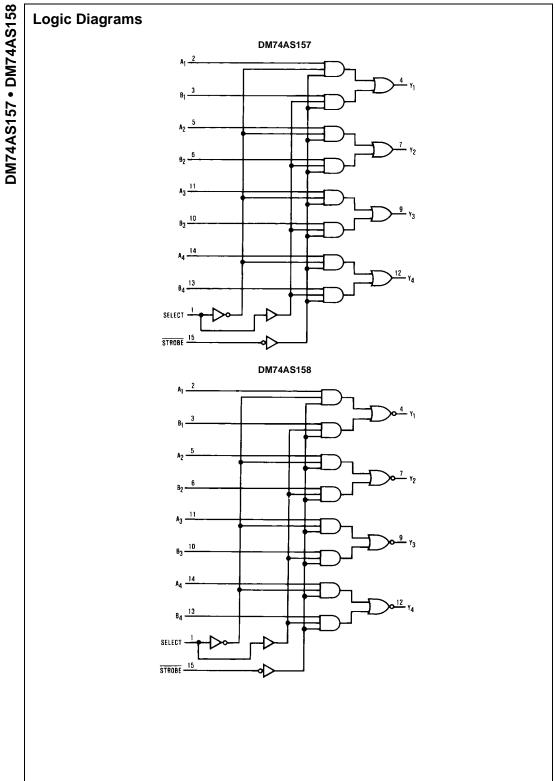

### **Absolute Maximum Ratings**(Note 1)

Supply Voltage 7V
Input Voltage 7V

Operating Free Air Temperature Range  $0^{\circ}$ C to +70 $^{\circ}$ C Storage Temperature Range  $-65^{\circ}$ C to +150 $^{\circ}$ C

Typical  $\theta_{JA}$ 

N Package 75.0 °C/W

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

### **Recommended Operating Conditions**

Symbol	Parameter	Min	Nom	Max	Units
V <sub>CC</sub>	Supply Voltage	4.5	5	5.5	V
V <sub>IH</sub>	HIGH Level Input Voltage	2			V
V <sub>IL</sub>	LOW Level Input Voltage			0.8	V
Он	HIGH Level Output Current			-2	mA
lol	LOW Level Output Current			20	mA
T <sub>A</sub>	Free Air Operating Temperature	0		70	°C

### **Electrical Characteristics**

over recommended operating free air temperature range. All typical values are measured at  $V_{CC} = 5V$ ,  $T_A = 25^{\circ}C$ .

Symbol	Parameter		Conditions		Тур	Max	Units	
V <sub>IK</sub>	Input Clamp Voltage	$V_{CC} = 4.5V, I_{I} = -4.5V$	$V_{CC} = 4.5V, I_I = -18 \text{ mA}$			-1.2	V	
V <sub>OH</sub>	HIGH Level	$V_{CC} = 4.5V \text{ to } 5.$	5V	V 2		.,,	V	
	Output Voltage	$I_{OH} = -2 \text{ mA}$		V <sub>CC</sub> – 2			v	
V <sub>OL</sub>	LOW Level	V <sub>CC</sub> = 4.5V			0.05	0.5	.,	
	Output Voltage	$I_{OL} = 20 \text{ mA}$	I <sub>OL</sub> = 20 mA		0.35	0.5	V	
I	Input Current at Max	ax V <sub>CC</sub> = 5.5V Select				0.2	mA	
	Input Voltage	$V_{IH} = 7V$	All Others			0.1	IIIA	
I <sub>IH</sub>	HIGH Level	$V_{CC} = 5.5V$	Select			40		
	Input Current	$V_{IH} = 2.7V$	All Others		20	20	μΑ	
I <sub>IL</sub>	LOW Level V <sub>CC</sub> = 5.5V		Select			-1	A	
	Input Current	$V_{IL}=0.4V$	All Others			-0.5	mA	
I <sub>O</sub> (Note 2)	Output Drive Current	$V_{CC} = 5.5V, V_O =$	V <sub>CC</sub> = 5.5V, V <sub>O</sub> = 2.25V			-112	mA	
I <sub>CC</sub>	Supply Current	V <sub>CC</sub> = 5.5V	DM74AS157		17.5	28	mA	
	DM7		DM74AS158		15.6	22.5	mA	

Note 2: The output conditions have been chosen to produce a current that closely approximates one half of the true short circuit current, I<sub>OS</sub>.

## **DM74AS157 Switching Characteristics**


over recommended operating free air temperature range


Symbol	Parameter	Conditions	From (Input)	To (Output)	Min	Max	Units
t <sub>PLH</sub>	Propagation Delay Time, LOW-to-HIGH Level Output	$V_{CC} = 4.5V \text{ to } 5.5V,$ $C_L = 50 \text{ pF},$	Data	Y	1	6	ns
t <sub>PHL</sub>	Propagation Delay Time, HIGH-to-LOW Level Output	$R_L = 500\Omega$	Data	Y	1	5.5	ns
t <sub>PLH</sub>	Propagation Delay Time, LOW-to-HIGH Level Output		STROBE	Y	2	10.5	ns
t <sub>PHL</sub>	Propagation Delay Time, HIGH-to-LOW Level Output		STROBE	Y	2	7.5	ns
t <sub>PLH</sub>	Propagation Delay Time, LOW-to-HIGH Level Output	-	Select	Y	2	11	ns
t <sub>PHL</sub>	Propagation Delay Time, HIGH-to-LOW Level Output		Select	Y	2	10	ns

### **DM74AS158 Switching Characteristics**


over recommended operating free air temperature range

Symbol	Parameter	Conditions	From	То	Min	Max	Units
			(Input)	(Output)			
t <sub>PLH</sub>	Propagation Delay Time, LOW-to-HIGH Level Output	V <sub>CC</sub> = 4.5V to 5.5V,	Data	Υ	1	5	ns
	'	$C_L = 50 \text{ pF},$					
t <sub>PHL</sub>	Propagation Delay Time, HIGH-to-LOW Level Output	$R_L = 500\Omega$	Data	Y	1	4.5	ns
t <sub>PLH</sub>	Propagation Delay Time, LOW-to-HIGH Level Output		STROBE	Y	2	6.5	ns
t <sub>PHL</sub>	Propagation Delay Time, HIGH-to-LOW Level Output		STROBE	Y	2	10	ns
t <sub>PLH</sub>	Propagation Delay Time, LOW-to-HIGH Level Output		Select	Y	2	9.5	ns
t <sub>PHL</sub>	Propagation Delay Time, HIGH-to-LOW Level Output		Select	Υ	2	10.5	ns

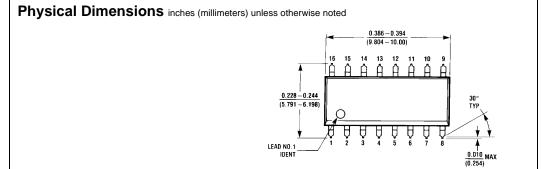


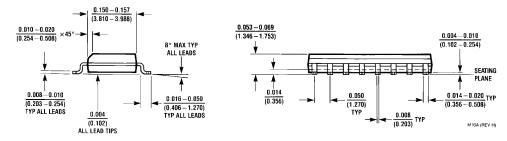

16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150 Narrow Package Number M16A

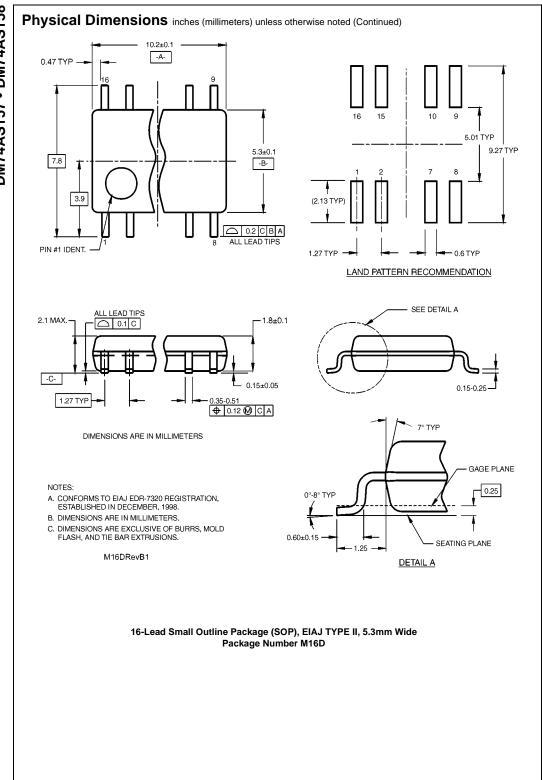

### Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

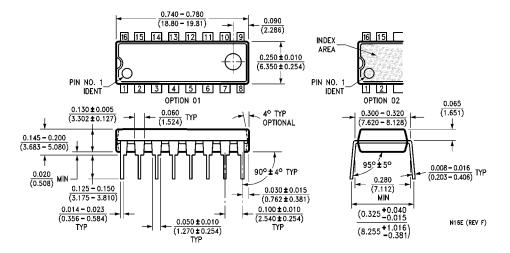

16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide Package Number N16E

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com