

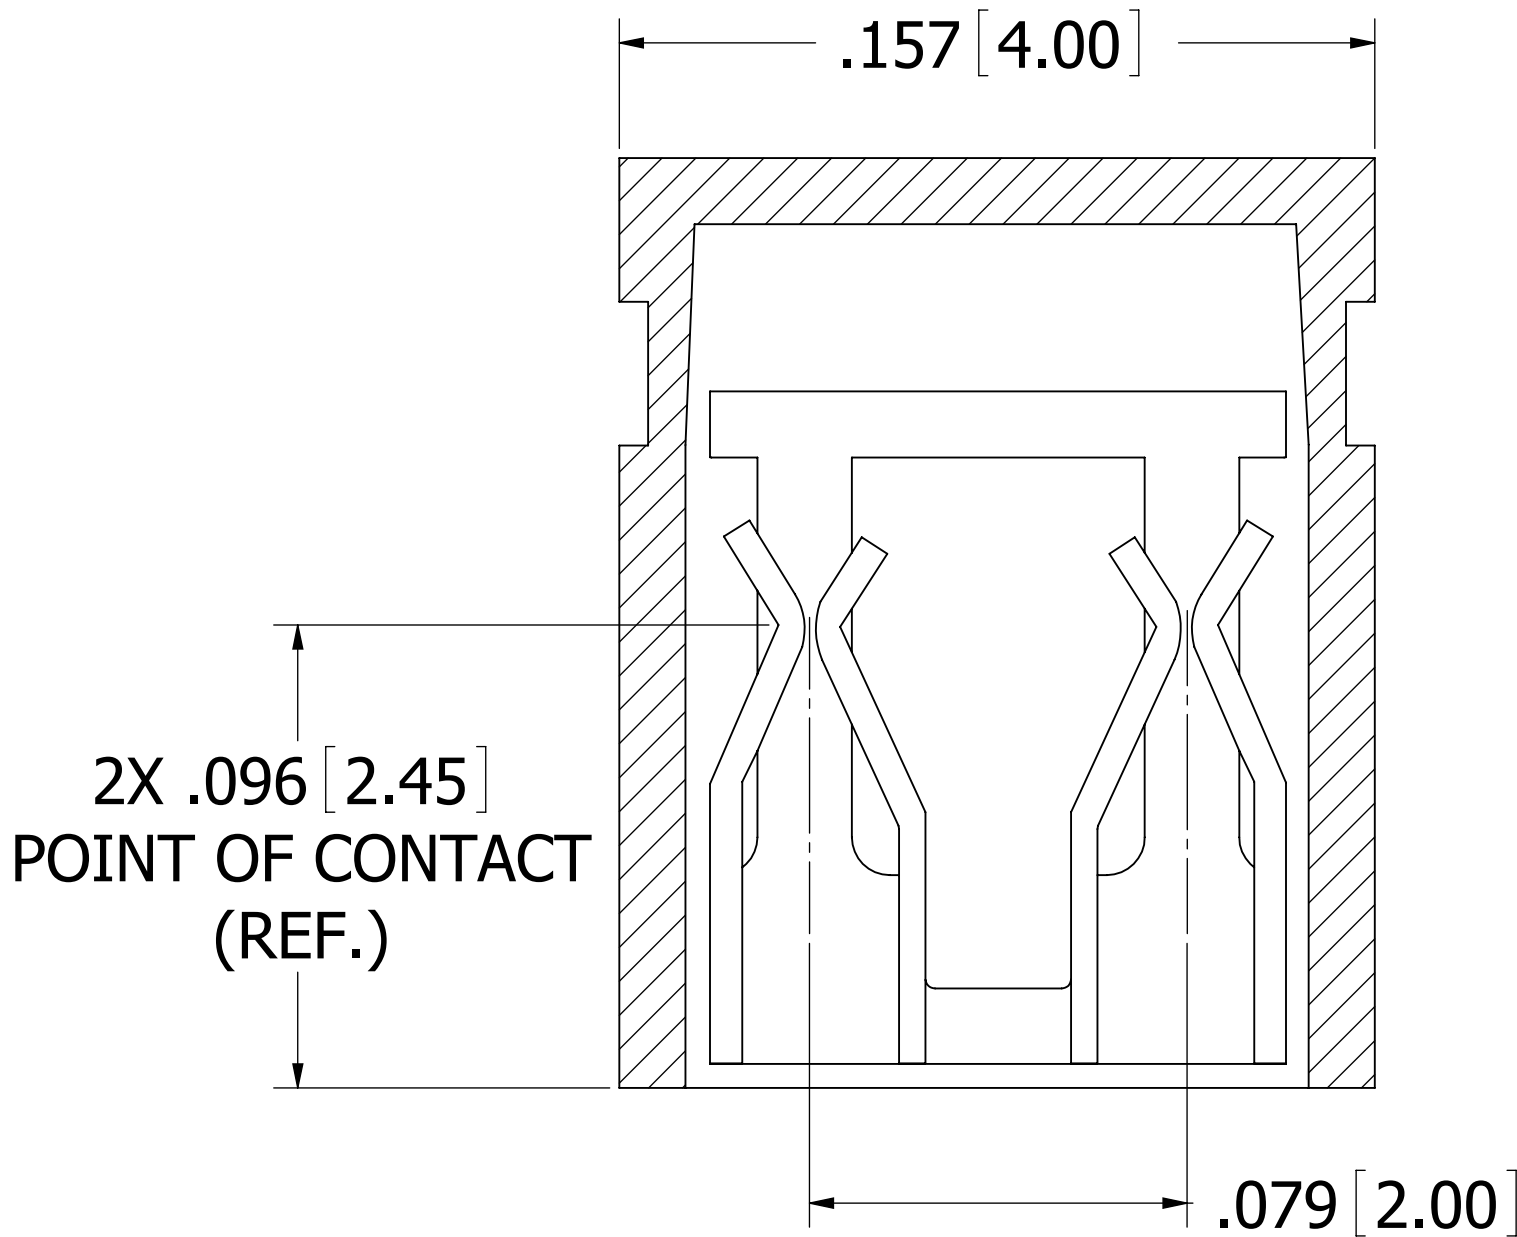
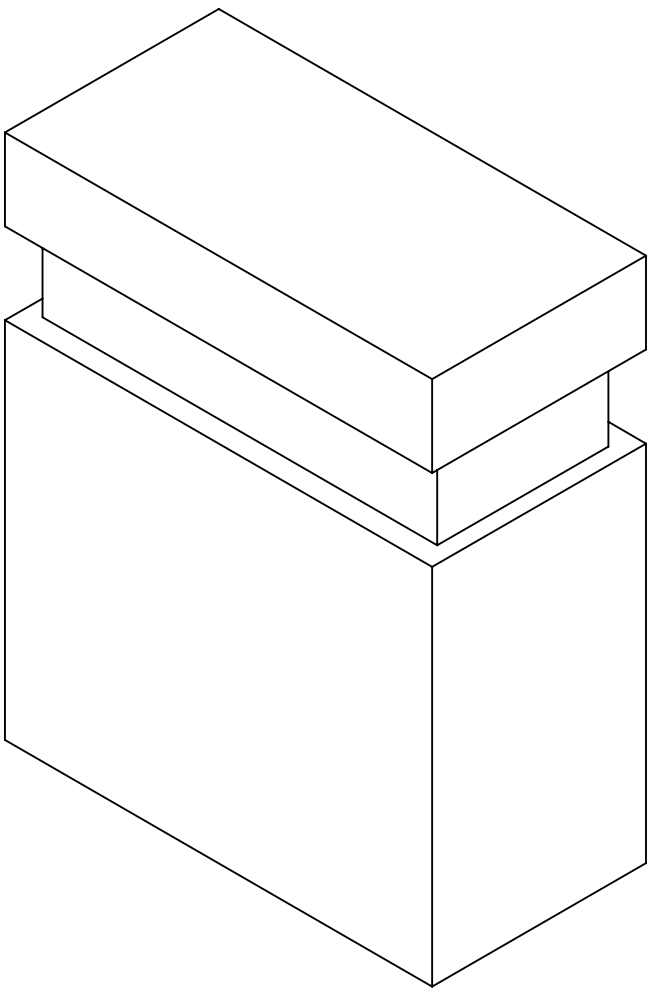


REVISIONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
A	2145	INITIAL RELEASE	07/16/2010	LH

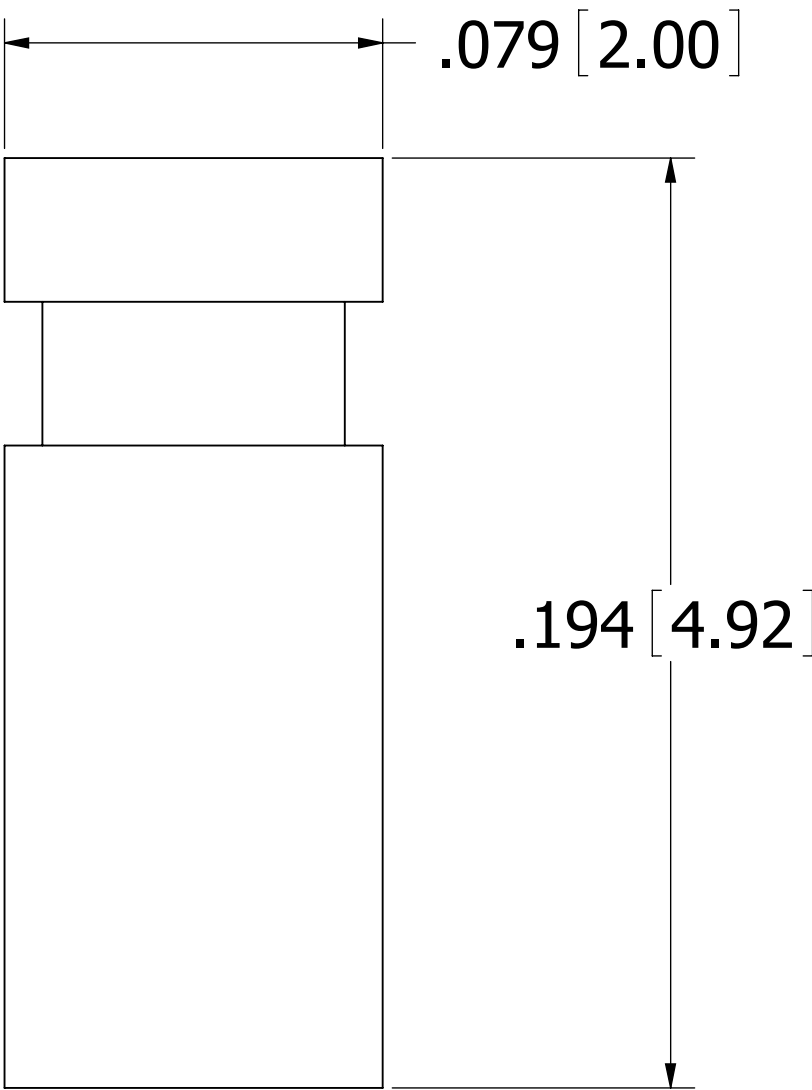



SECTION A - A

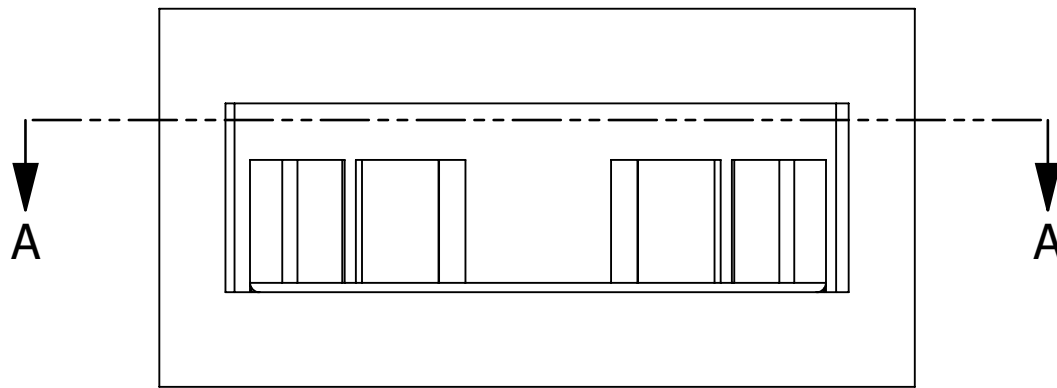

- NOTES:
- 1. INSULATOR MATERIAL: PBT.
  - 2. CONTACT MATERIAL: PHOSPHOR BRONZE.
  - 3. PLATING: GOLD FLASH OVERALL.
  - 4. UL FLAMMABILITY RATING: 94V-0.
  - 5. DIELECTRIC WITHSTANDING VOLTAGE: 650V AC.
  - 6. CURRENT RATING: 3 AMPS PER CONTACT.
  - 7. CONTACT RESISTANCE: 30 MILLI OHMS MAX.
  - 8. INSULATION RESISTANCE: 1000 MEGA OHMS.
  - 9. DOUBLE TUNING FORK TYPE CONTACT, ACCOMMODATES .020"[0.50mm] SQ PINS.  
.079"[2.00mm] PITCH LOW-PROFILE MINI TYPE.



UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES[MM]  
TOLERANCES:  
ANGULAR:  $\pm 30^\circ$   
.XX= $\pm .012$  [.30]  
.XXX= $\pm .008$  [.20]  
.XXXX= $\pm .004$  [.10]  
  
INTERPRET DIMENSIONS AND GEOMETRIC  
TOLERANCING  
PER: ASME Y14.5M-2009

		DATE	NAME	 <b>SULLINS</b> CONNECTOR SOLUTIONS	
DRAWN		7/16/2010	LH		
THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.					
					
DESCRIPTION <b>MINI SHUNT, .079" CC, CLOSED TOP</b>					
<b>PART NUMBER</b> <b>SPN02SVEN-RC</b>					
SIZE <b>C</b>	DWG. NO. <b>11502</b>				REV <b>A</b>
SCALE: 16:1					SHEET 1 OF 1