



## Film Capacitors

### Metallized Polyester Film Capacitors (MKT)

**Series/Type:** B32520 ... B32529

**Date:** August 2008

**General purpose (stacked/wound)**
**Preliminary Data**
**Typical applications**

- Blocking
- Coupling, decoupling
- Bypassing
- RFI for automotive

**Climatic**

- Max. operating temperature: 125 °C
- Climatic category (IEC 60068-1): 55/125/56

**Construction**

- Dielectric: polyethylene terephthalate (polyester, PET)
- Stacked-film technology for lead spacing 5 to 15 mm  
= code E, D or C in digit 7 of ordering code
- Wound capacitor technology for lead spacing 10 to 27.5 mm  
= code N, Q, R or T in digit 7 of ordering code
- Plastic case (UL 94 V-0)
- Epoxy resin sealing (UL 94 V-0)

**Features**

- High pulse strength
- High contact reliability

**Terminals**


- Parallel wire leads, lead-free tinned
- Special lead lengths available on request

**Marking**

Manufacturer's logo,  
 rated capacitance (coded), cap. tolerance (code letter),  
 rated DC voltage, date of manufacture (coded),  
 coded type ("1") for lead spacing 5 mm,  
 series and lot number for lead spacing  $\geq 10$  mm

**Delivery mode**


Bulk (untaped)  
 Taped (Ammo pack or reel)  
 For notes on taping, refer to chapter "Taping and packing".

**Dimensional drawing**


Dimensions in mm

Lead spacing	Lead diameter	Type
$e \pm 0.4$	$d_1$	
5.0	0.5	B32529
7.5	0.5	B32520
10.0	0.6 <sup>1)</sup>	B32521
15.0	0.8	B32522
22.5	0.8	B32523
27.5	0.8	B32524
37.5	1.0	B32526

 1) 0.5 mm for capacitor width  $w = 4$  mm




Preliminary Data

Overview of available types

Lead spacing	5.0 mm					7.5 mm				10.0 mm				
Type	B32529					B32520				B32521				
Page	6					10				12				
Technology	s	s	s	s	s	s	s	s	s	s	s	s	s	w
V <sub>R</sub> (V DC)	63	100	250	400	630	63	100	250	400	63	100	250	400	630
V <sub>RMS</sub> (V AC)	40	63	160	200	400	40	63	160	200	40	63	160	200	200
C <sub>R</sub> (μF)														
0.0010														
0.0015														
0.0022														
0.0033														
0.0047														
0.0068														
0.010														
0.015														
0.022														
0.033														
0.047														
0.068														
0.10														
0.15														
0.22														
0.33														
0.47														
0.68														
1.0														
1.5														
2.2														
3.3														
4.7														

Technology: s = Stacked-film technology / w = Wound capacitor technology



B32520 ... B32529


General purpose (stacked/wound)





Preliminary Data

Overview of available types


Lead spacing	15.0 mm						22.5 mm						27.5 mm				
Type	B32522						B32523						B32524				
Page	14						17						18				
Technology	s	s/w	s/w	s	w	w	w	w	w	w	w	w	w	w	w	w	
V <sub>R</sub> (V DC)	63	100	250	400	450	630	63	100	250	400	630	63	100	250	400	630	
V <sub>RMS</sub> (V AC)	40	63	160	200	200	200	40	63	160	200	200	40	63	160	200	220	
C <sub>R</sub> (µF)																	
0.033																	
0.047																	
0.068																	
0.10																	
0.15																	
0.22																	
0.33																	
0.47																	
0.68																	
1.0																	
1.5																	
2.2																	
3.3																	
4.7																	
6.8																	
10																	
15																	
22																	
33																	
47																	
68																	
100																	

Technology: s = Stacked-film technology / w = Wound capacitor technology


**Preliminary Data**
**Overview of available types**

Lead spacing	37.5 mm			
Type	B32526			
Page	20			
Technology	w	w	w	w
$V_R$ (V DC)	63	100	250	400
$V_{RMS}$ (V AC)	40	63	160	200
$C_R$ ( $\mu$ F)				
3.3				
4.7				
6.8				
10				
15				
22				
33				
47				
68				
100				
150				
220				

Technology: s = Stacked-film technology / w = Wound capacitor technology


**B32529**
**General purpose (stacked)**
**Preliminary Data**
**Ordering codes and packing units (lead spacing 5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
63	40	0.0010	2.5 × 6.5 × 7.2	B32529C0102+***	12800	11200	8000
		0.0015	2.5 × 6.5 × 7.2	B32529C0152+***	12800	11200	8000
		0.0022	2.5 × 6.5 × 7.2	B32529C0222+***	12800	11200	8000
		0.0033	2.5 × 6.5 × 7.2	B32529C0332+***	12800	11200	8000
		0.0047	2.5 × 6.5 × 7.2	B32529C0472+***	12800	11200	8000
		0.0068	2.5 × 6.5 × 7.2	B32529C0682+***	12800	11200	8000
		0.010	2.5 × 6.5 × 7.2	B32529C0103+***	12800	11200	8000
		0.015	2.5 × 6.5 × 7.2	B32529C0153+***	12800	11200	8000
		0.022	2.5 × 6.5 × 7.2	B32529C0223+***	12800	11200	8000
		0.033	2.5 × 6.5 × 7.2	B32529C0333+***	12800	11200	8000
		0.047	2.5 × 6.5 × 7.2	B32529C0473+***	12800	11200	8000
		0.068	2.5 × 6.5 × 7.2	B32529C0683+***	12800	11200	8000
		0.10	2.5 × 6.5 × 7.2	B32529C0104+***	12800	11200	8000
		0.15	2.5 × 6.5 × 7.2	B32529C0154+***	12800	11200	8000
		0.22	2.5 × 6.5 × 7.2	B32529C0224+***	12800	11200	8000
		0.33	3.0 × 6.5 × 7.2	B32529C0334+***	10800	9600	8000
		0.47	3.5 × 8.0 × 7.2	B32529C0474+***	9200	8000	8000
		0.68	4.5 × 9.5 × 7.3	B32529C0684+***	7200	6000	6000
		1.0	4.5 × 9.5 × 7.3	B32529C0105+***	7200	6000	6000
		1.5	6.0 × 10.5 × 7.5	B32529C0155+***	5200	4400	4000
2.2	7.8 × 13.0 × 7.8	B32529D0225+***	4000	3200	4000		
3.3	7.8 × 13.0 × 7.8	B32529D0335+***	4000	3200	4000		
4.7	7.8 × 13.0 × 7.8	B32529D0475M***	4000	3200	4000		

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 – 1 mm)


**Preliminary Data**
**Ordering codes and packing units (lead spacing 5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
100	63	0.0010	2.5 × 6.5 × 7.2	B32529C1102+***	12800	11200	8000
		0.0015	2.5 × 6.5 × 7.2	B32529C1152+***	12800	11200	8000
		0.0022	2.5 × 6.5 × 7.2	B32529C1222+***	12800	11200	8000
		0.0033	2.5 × 6.5 × 7.2	B32529C1332+***	12800	11200	8000
		0.0047	2.5 × 6.5 × 7.2	B32529C1472+***	12800	11200	8000
		0.0068	2.5 × 6.5 × 7.2	B32529C1682+***	12800	11200	8000
		0.010	2.5 × 6.5 × 7.2	B32529C1103+***	12800	11200	8000
		0.015	2.5 × 6.5 × 7.2	B32529C1153+***	12800	11200	8000
		0.022	2.5 × 6.5 × 7.2	B32529C1223+***	12800	11200	8000
		0.033	2.5 × 6.5 × 7.2	B32529C1333+***	12800	11200	8000
		0.047	2.5 × 6.5 × 7.2	B32529C1473+***	12800	11200	8000
		0.068	2.5 × 6.5 × 7.2	B32529C1683+***	12800	11200	8000
		0.10	2.5 × 6.5 × 7.2	B32529C1104+***	12800	11200	8000
		0.15	3.0 × 6.5 × 7.2	B32529C1154+***	10800	9600	8000
		0.22	3.5 × 8.0 × 7.2	B32529C1224+***	9200	8000	8000
		0.33	3.5 × 8.0 × 7.2	B32529C1334+***	9200	8000	8000
		0.47	4.5 × 9.5 × 7.3	B32529C1474+***	7200	6000	6000
0.68	6.0 × 10.5 × 7.5	B32529C1684+***	5200	4400	4000		
1.0	7.8 × 13.0 × 7.8	B32529D1105+***	4000	3200	4000		

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 – 1 mm)


**B32529**
**General purpose (stacked)**
**Preliminary Data**
**Ordering codes and packing units (lead spacing 5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
250	160	0.0010	2.5 × 6.5 × 7.2	B32529C3102+***	12800	11200	8000
		0.0015	2.5 × 6.5 × 7.2	B32529C3152+***	12800	11200	8000
		0.0022	2.5 × 6.5 × 7.2	B32529C3222+***	12800	11200	8000
		0.0033	2.5 × 6.5 × 7.2	B32529C3332+***	12800	11200	8000
		0.0047	2.5 × 6.5 × 7.2	B32529C3472+***	12800	11200	8000
		0.0068	2.5 × 6.5 × 7.2	B32529C3682+***	12800	11200	8000
		0.010	2.5 × 6.5 × 7.2	B32529C3103+***	12800	11200	8000
		0.015	2.5 × 6.5 × 7.2	B32529C3153+***	12800	11200	8000
		0.022	2.5 × 6.5 × 7.2	B32529C3223+***	12800	11200	8000
		0.033	3.0 × 6.5 × 7.2	B32529C3333+***	10800	9600	8000
		0.047	3.5 × 8.0 × 7.2	B32529C3473+***	9200	8000	8000
		0.068	4.5 × 9.5 × 7.3	B32529C3683+***	7200	6000	6000
		0.10	4.5 × 9.5 × 7.3	B32529C3104+***	7200	6000	6000
		0.15	5.0 × 10.0 × 7.5	B32529C3154+***	6400	5600	6000
		0.22	7.8 × 13.0 × 7.8	B32529D3224+***	4000	3200	4000
		0.33	7.8 × 13.0 × 7.8	B32529C3334+***	4000	3200	4000
		0.47	7.8 × 13.0 × 7.8	B32529C3474+***	4000	3200	4000

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%

J = ±5%


\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 – 1 mm)




**Preliminary Data**
**Ordering codes and packing units (lead spacing 5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
400	200	0.0010	2.5 × 6.5 × 7.2	B32529C6102+***	12800	11200	8000
		0.0015	2.5 × 6.5 × 7.2	B32529C6152+***	12800	11200	8000
		0.0022	2.5 × 6.5 × 7.2	B32529C6222+***	12800	11200	8000
		0.0033	2.5 × 6.5 × 7.2	B32529C6332+***	12800	11200	8000
		0.0047	2.5 × 6.5 × 7.2	B32529C6472+***	12800	11200	8000
		0.0068	2.5 × 6.5 × 7.2	B32529C6682+***	12800	11200	8000
		0.010	3.0 × 6.5 × 7.2	B32529E6103+***	10800	9600	8000
		0.015	3.0 × 6.5 × 7.2	B32529E6153+***	10800	9600	8000
		0.022	3.5 × 8.0 × 7.2	B32529E6223+***	9200	8000	8000
		0.033	4.5 × 9.5 × 7.3	B32529E6333+***	7200	6000	6000
		0.047	4.5 × 9.5 × 7.3	B32529E6473+***	7200	6000	6000
		0.068	6.0 × 10.5 × 7.5	B32529E6683+***	5200	4400	4000
		0.10	7.8 × 13.0 × 7.8	B32529E6104+***	4000	3200	4000
		0.15	7.8 × 13.0 × 7.8	B32529E6154+***	4000	3200	4000
		630	400	0.0010	2.5 × 6.5 × 7.2	B32529C8102+***	12800
0.0015	2.5 × 6.5 × 7.2			B32529C8152+***	12800	11200	8000
0.0022	2.5 × 6.5 × 7.2			B32529C8222+***	12800	11200	8000
0.0033	3.5 × 8.0 × 7.2			B32529C8332+***	9200	8000	8000
0.0047	3.5 × 8.0 × 7.2			B32529C8472+***	9200	8000	8000
0.0068	3.5 × 8.0 × 7.2			B32529C8682+***	9200	8000	8000
0.010	5.0 × 10.0 × 7.5			B32529C8103+***	6400	5600	6000
0.015	5.0 × 10.0 × 7.5			B32529C8153+***	6400	5600	6000
0.022	6.0 × 10.5 × 7.5			B32529C8223+***	5200	4400	4000
0.033	7.8 × 13.0 × 7.8			B32529C8333+***	4000	3200	4000

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 – 1 mm)


**B32520**
**General purpose (stacked)**
**Preliminary Data**
**Ordering codes and packing units (lead spacing 7.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$	Ordering code (composition see below)	Ammo pack	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$	mm		pcs./MOQ		
63	40	0.068	2.5 × 7.0 × 10.0	B32520C0683+***	12800	11200	10000
		0.10	2.5 × 7.0 × 10.0	B32520C0104+***	12800	11200	10000
		0.15	2.5 × 7.0 × 10.0	B32520C0154+***	12800	11200	10000
		0.22	2.5 × 7.0 × 10.0	B32520C0224+***	12800	11200	10000
		0.33	2.5 × 7.0 × 10.0	B32520C0334+***	12800	11200	10000
		0.47	3.0 × 8.0 × 10.0	B32520C0474+***	10400	9600	8000
		0.68	4.0 × 8.5 × 10.0	B32520C0684+***	8000	7200	6000
		1.0	5.0 × 10.5 × 10.0	B32520C0105+***	6400	5600	4000
		1.5	5.0 × 10.5 × 10.0	B32520C0155+***	6400	5600	4000
		2.2	6.0 × 12.0 × 10.3	B32520C0225+***	5200	4400	3000
100	63	0.047	2.5 × 7.0 × 10.0	B32520C1473+***	12800	11200	10000
		0.068	2.5 × 7.0 × 10.0	B32520C1683+***	12800	11200	10000
		0.10	2.5 × 7.0 × 10.0	B32520C1104+***	12800	11200	10000
		0.15	3.0 × 8.0 × 10.0	B32520C1154+***	10400	9600	8000
		0.22	3.0 × 8.0 × 10.0	B32520C1224+***	10400	9600	8000
		0.33	4.0 × 8.5 × 10.0	B32520C1334+***	8000	7200	6000
		0.47	5.0 × 10.5 × 10.0	B32520C1474+***	6400	5600	4000
		0.68	6.0 × 12.0 × 10.3	B32520C1684+***	5200	4400	3000
		1.0	6.0 × 12.0 × 10.3	B32520C1105+***	5200	4400	3000
250	160	0.015	2.5 × 7.0 × 10.0	B32520C3153+***	12800	11200	10000
		0.022	2.5 × 7.0 × 10.0	B32520C3223+***	12800	11200	10000
		0.033	2.5 × 7.0 × 10.0	B32520C3333+***	12800	11200	10000
		0.047	2.5 × 7.0 × 10.0	B32520C3473+***	12800	11200	10000
		0.068	3.0 × 8.0 × 10.0	B32520C3683+***	10400	9600	8000
		0.10	4.0 × 8.5 × 10.0	B32520C3104+***	8000	7200	6000
		0.15	5.0 × 10.5 × 10.0	B32520C3154+***	6400	5600	4000
		0.22	6.0 × 12.0 × 10.3	B32520C3224+***	5200	4400	3000

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 – 1 mm)


**Preliminary Data**
**Ordering codes and packing units (lead spacing 7.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
400	200	0.0010	2.5 × 7.0 × 10.0	B32520C6102+***	12800	11200	10000
		0.0015	2.5 × 7.0 × 10.0	B32520C6152+***	12800	11200	10000
		0.0022	2.5 × 7.0 × 10.0	B32520C6222+***	12800	11200	10000
		0.0033	2.5 × 7.0 × 10.0	B32520C6332+***	12800	11200	10000
		0.0047	2.5 × 7.0 × 10.0	B32520C6472+***	12800	11200	10000
		0.0068	2.5 × 7.0 × 10.0	B32520C6682+***	12800	11200	10000
		0.010	2.5 × 7.0 × 10.0	B32520C6103+***	12800	11200	10000
		0.015	3.0 × 8.0 × 10.0	B32520E6153+***	10400	9600	8000
		0.022	3.0 × 8.0 × 10.0	B32520E6223+***	10400	9600	8000
		0.033	4.0 × 8.5 × 10.0	B32520E6333+***	8000	7200	6000
		0.047	4.0 × 8.5 × 10.0	B32520E6473+***	8000	7200	6000
		0.068	5.0 × 10.5 × 10.0	B32520E6683+***	6400	5600	4000
		0.10	5.0 × 10.5 × 10.0	B32520E6104+***	6400	5600	4000
		0.15	6.0 × 12.0 × 10.3	B32520E6154+***	5200	4400	3000

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M =  $\pm 20\%$

K =  $\pm 10\%$


J =  $\pm 5\%$

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 – 1 mm)


**B32521**
**General purpose (stacked/wound)**
**Preliminary Data**
**Ordering codes and packing units (lead spacing 10 mm)**

$V_R$	$V_{RMS}$ $f \leq 60 \text{ Hz}$	$C_R$	Max. dimensions $w \times h \times l$	Ordering code (composition see below)	Ammo pack	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu\text{F}$	mm		pcs./MOQ		
63	40	0.47	$4.0 \times 7.0 \times 13.0$	B32521C0474+***	4000	6800	4000
		0.68	$4.0 \times 7.0 \times 13.0$	B32521C0684+***	4000	6800	4000
		1.0	$4.0 \times 9.0 \times 13.0$	B32521C0105+***	4000	6800	4000
		1.5	$5.0 \times 11.0 \times 13.0$	B32521C0155+***	3320	5200	4000
		2.2	$5.0 \times 11.0 \times 13.0$	B32521C0225+***	3320	5200	4000
		3.3	$6.0 \times 12.0 \times 13.0$	B32521C0335+***	2720	4400	4000
100	63	0.10	$4.0 \times 7.0 \times 13.0$	B32521C1104+***	4000	6800	4000
		0.15	$4.0 \times 7.0 \times 13.0$	B32521C1154+***	4000	6800	4000
		0.22	$4.0 \times 7.0 \times 13.0$	B32521C1224+***	4000	6800	4000
		0.33	$4.0 \times 7.0 \times 13.0$	B32521C1334+***	4000	6800	4000
		0.47	$4.0 \times 9.0 \times 13.0$	B32521C1474+***	4000	6800	4000
		0.68	$5.0 \times 11.0 \times 13.0$	B32521C1684+***	3320	5200	4000
		1.0	$6.0 \times 12.0 \times 13.0$	B32521C1105+***	2720	4400	4000
250	160	0.033	$4.0 \times 7.0 \times 13.0$	B32521C3333+***	4000	6800	4000
		0.047	$4.0 \times 7.0 \times 13.0$	B32521C3473+***	4000	6800	4000
		0.068	$4.0 \times 7.0 \times 13.0$	B32521C3683+***	4000	6800	4000
		0.10	$4.0 \times 7.0 \times 13.0$	B32521C3104+***	4000	6800	4000
		0.15	$4.0 \times 9.0 \times 13.0$	B32521C3154+***	4000	6800	4000
		0.22	$5.0 \times 11.0 \times 13.0$	B32521C3224+***	3320	5200	4000
		0.33	$5.0 \times 11.0 \times 13.0$	B32521C3334+***	3320	5200	4000
		0.47	$6.0 \times 12.0 \times 13.0$	B32521C3474+***	2720	4400	4000
400	200	0.010	$4.0 \times 7.0 \times 13.0$	B32521E6103+***	4000	6800	4000
		0.015	$4.0 \times 7.0 \times 13.0$	B32521E6153+***	4000	6800	4000
		0.022	$4.0 \times 7.0 \times 13.0$	B32521E6223+***	4000	6800	4000
		0.033	$4.0 \times 7.0 \times 13.0$	B32521E6333+***	4000	6800	4000
		0.047	$4.0 \times 9.0 \times 13.0$	B32521E6473+***	4000	6800	4000
		0.068	$4.0 \times 9.0 \times 13.0$	B32521E6683+***	4000	6800	4000
		0.10	$5.0 \times 11.0 \times 13.0$	B32521E6104+***	3320	5200	4000
		0.15	$6.0 \times 12.0 \times 13.0$	B32521E6154+***	2720	4400	4000

**∇ Wound capacitor technology**

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

 M =  $\pm 20\%$ 

 K =  $\pm 10\%$ 


 J =  $\pm 5\%$ 

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 – 1 mm)


**Preliminary Data**
**Ordering codes and packing units (lead spacing 10 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
630	200	0.0068 ▽	4.0 × 9.0 × 13.0	B32521N8682+***	4000	6800	4000
		0.010 ▽	4.0 × 9.0 × 13.0	B32521N8103+***	4000	6800	4000
		0.015 ▽	5.0 × 11.0 × 13.0	B32521N8153+***	3320	5200	4000
		0.022 ▽	5.0 × 11.0 × 13.0	B32521N8223+***	3320	5200	4000
		0.033 ▽	6.0 × 12.0 × 13.0	B32521N8333+***	2720	4400	4000

▽ Wound capacitor technology

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 –1 mm)


**B32522**
**General purpose (stacked/wound)**
**Preliminary Data**
**Ordering codes and packing units (lead spacing 15 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
63	40	0.68	5.0 × 10.5 × 18.0	B32522C0684+***	4680	5200	4000
		1.0	5.0 × 10.5 × 18.0	B32522C0105+***	4680	5200	4000
		1.5	5.0 × 10.5 × 18.0	B32522C0155+***	4680	5200	4000
		2.2	5.0 × 10.5 × 18.0	B32522C0225+***	4680	5200	4000
		3.3	6.0 × 11.0 × 18.0	B32522C0335+***	3840	4400	4000
		4.7	7.0 × 12.5 × 18.0	B32522C0475+***	3320	3600	4000
		6.8	8.5 × 14.5 × 18.0	B32522C0685+***	2720	2800	2000
		10	9.0 × 17.5 × 18.0	B32522C0106+***	2560	2800	2000
100	63	0.33	5.0 × 10.5 × 18.0	B32522C1334+***	4680	5200	4000
		0.47	5.0 × 10.5 × 18.0	B32522C1474+***	4680	5200	4000
		0.68	5.0 × 10.5 × 18.0	B32522C1684+***	4680	5200	4000
		1.0	5.0 × 10.5 × 18.0	B32522C1105+***	4680	5200	4000
		1.0 ▽	6.0 × 11.0 × 18.0	B32522Q1105+***	3840	4400	4000
		1.5	6.0 × 11.0 × 18.0	B32522C1155+***	3840	4400	4000
		1.5 ▽	7.0 × 12.5 × 18.0	B32522Q1155+***	3320	3600	4000
		2.2	7.0 × 12.5 × 18.0	B32522C1225+***	3320	3600	4000
		2.2 ▽	8.5 × 14.5 × 18.0	B32522Q1225+***	2720	2800	2000
		3.3	8.5 × 14.5 × 18.0	B32522C1335+***	2720	2800	2000
		3.3 ▽	9.0 × 17.5 × 18.0	B32522Q1335+***	2560	2800	2000
		4.7	9.0 × 17.5 × 18.0	B32522C1475+***	2560	2800	2000
		4.7 ▽	11.0 × 18.5 × 18.0	B32522Q1475+***	—	2200	1200

▽ Wound capacitor technology

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 – 1 mm)


**Preliminary Data**
**Ordering codes and packing units (lead spacing 15 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
250	160	0.10	$5.0 \times 10.5 \times 18.0$	B32522C3104+***	4680	5200	4000
		0.15	$5.0 \times 10.5 \times 18.0$	B32522C3154+***	4680	5200	4000
		0.22	$5.0 \times 10.5 \times 18.0$	B32522C3224+***	4680	5200	4000
		0.33	$5.0 \times 10.5 \times 18.0$	B32522C3334+***	4680	5200	4000
		0.47	$6.0 \times 11.0 \times 18.0$	B32522C3474+***	3840	4400	4000
		0.68	$7.0 \times 12.5 \times 18.0$	B32522C3684+***	3320	3600	4000
		1.0	$8.5 \times 14.5 \times 18.0$	B32522C3105+***	2720	2800	2000
		1.0	$\nabla$ $8.5 \times 14.5 \times 18.0$	B32522N3105+***	2720	2800	2000
		1.5	$9.0 \times 17.5 \times 18.0$	B32522C3155+***	2560	2800	2000
		1.5	$\nabla$ $9.0 \times 17.5 \times 18.0$	B32522N3155+***	2560	2800	2000
400	200	0.047	$5.0 \times 10.5 \times 18.0$	B32522E6473+***	4680	5200	4000
		0.068	$5.0 \times 10.5 \times 18.0$	B32522E6683+***	4680	5200	4000
		0.10	$5.0 \times 10.5 \times 18.0$	B32522E6104+***	4680	5200	4000
		0.15	$5.0 \times 10.5 \times 18.0$	B32522E6154+***	4680	5200	4000
		0.22	$6.0 \times 11.0 \times 18.0$	B32522E6224+***	3840	4400	4000
		0.33	$7.0 \times 12.5 \times 18.0$	B32522E6334+***	3320	3600	4000
		0.47	$9.0 \times 17.5 \times 18.0$	B32522E6474+***	2560	2800	2000
		0.68	$9.0 \times 17.5 \times 18.0$	B32522E6684+***	2560	2800	2000
450	200	0.10	$\nabla$ $5.0 \times 10.5 \times 18.0$	B32522N6104+***	4680	5200	4000
		0.15	$\nabla$ $5.0 \times 10.5 \times 18.0$	B32522N6154+***	4680	5200	4000
		0.22	$\nabla$ $6.0 \times 11.0 \times 18.0$	B32522N6224+***	3840	4400	4000
		0.33	$\nabla$ $7.0 \times 12.5 \times 18.0$	B32522N6334+***	3320	3600	4000
		0.47	$\nabla$ $8.5 \times 14.5 \times 18.0$	B32522N6474+***	2720	2800	2000
		0.68	$\nabla$ $9.0 \times 17.5 \times 18.0$	B32522N6684+***	2560	2800	2000
		1.0	$\nabla$ $11.0 \times 18.5 \times 18.0$	B32522N6105+***	—	2200	1200

$\nabla$  Wound capacitor technology

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M =  $\pm 20\%$

K =  $\pm 10\%$


J =  $\pm 5\%$

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 – 1 mm)


**B32522**
**General purpose (stacked/wound)**
**Preliminary Data**
**Ordering codes and packing units (lead spacing 15 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
630	200	0.033 ▽	5.0 × 10.5 × 18.0	B32522Q8333+***	4680	5200	4000
		0.047 ▽	5.0 × 10.5 × 18.0	B32522Q8473+***	4680	5200	4000
		0.068 ▽	6.0 × 11.0 × 18.0	B32522Q8683+***	3840	4400	4000
		0.10 ▽	7.0 × 12.5 × 18.0	B32522Q8104+***	3320	3600	4000
		0.15 ▽	8.5 × 14.5 × 18.0	B32522Q8154+***	2720	2800	2000
		0.22 ▽	9.0 × 17.5 × 18.0	B32522Q8224+***	2560	2800	2000
		0.33 ▽	11.0 × 18.5 × 18.0	B32522Q8334+***	–	2200	1200

▽ Wound capacitor technology

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%

J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 –1 mm)



**Preliminary Data**
**Ordering codes and packing units (lead spacing 22.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./MOQ	Untaped pcs./MOQ
V DC	V AC	$\mu F$					
63	40	3.3	$6.0 \times 15.0 \times 26.5$	B32523R0335+***	2720	2800	2880
		4.7	$6.0 \times 15.0 \times 26.5$	B32523R0475+***	2720	2800	2880
		6.8	$6.0 \times 15.0 \times 26.5$	B32523R0685+***	2720	2800	2880
		10	$7.0 \times 16.0 \times 26.5$	B32523R0106+***	2320	2400	2520
		15	$10.5 \times 16.5 \times 26.5$	B32523R0156+***	1560	1600	2160
		22	$12.0 \times 22.0 \times 26.5$	B32523R0226+***	–	–	1800
100	63	1.5	$6.0 \times 15.0 \times 26.5$	B32523Q1155+***	2720	2800	2880
		2.2	$6.0 \times 15.0 \times 26.5$	B32523Q1225+***	2720	2800	2880
		3.3	$6.0 \times 15.0 \times 26.5$	B32523Q1335+***	2720	2800	2880
		4.7	$7.0 \times 16.0 \times 26.5$	B32523Q1475+***	2320	2400	2540
		6.8	$8.5 \times 16.5 \times 26.5$	B32523Q1685+***	1960	2000	2040
		10	$10.5 \times 16.5 \times 26.5$	B32523Q1106+***	1560	1600	2160
250	160	15	$12.0 \times 22.0 \times 26.5$	B32523Q1156+***	–	–	1800
		0.47	$6.0 \times 15.0 \times 26.5$	B32523Q3474+***	2720	2800	2880
		0.68	$6.0 \times 15.0 \times 26.5$	B32523Q3684+***	2720	2800	2880
		1.0	$6.0 \times 15.0 \times 26.5$	B32523Q3105+***	2720	2800	2880
		1.5	$7.0 \times 16.0 \times 26.5$	B32523Q3155+***	2320	2400	2520
		2.2	$10.5 \times 16.5 \times 26.5$	B32523Q3225+***	1560	1600	2160
400	200	3.3	$11.0 \times 20.5 \times 26.5$	B32523Q3335+***	1480	1400	2040
		0.22	$6.0 \times 15.0 \times 26.5$	B32523Q6224+***	2720	2800	2880
		0.33	$6.0 \times 15.0 \times 26.5$	B32523Q6334+***	2720	2800	2880
		0.47	$7.0 \times 16.0 \times 26.5$	B32523Q6474+***	2320	2400	2520
		0.68	$8.5 \times 16.5 \times 26.5$	B32523Q6684+***	1920	2000	2040
		1.0	$10.5 \times 16.5 \times 26.5$	B32523Q6105+***	1560	1600	2160
630	200	1.5	$11.0 \times 20.5 \times 26.5$	B32523Q6155+***	1480	1400	2040
		0.10	$6.0 \times 15.0 \times 26.5$	B32523Q8104+***	2720	2800	2880
		0.15	$6.0 \times 15.0 \times 26.5$	B32523Q8154+***	2720	2800	2880
		0.22	$7.0 \times 16.0 \times 26.5$	B32523Q8224+***	2320	2400	2520
		0.33	$10.5 \times 16.5 \times 26.5$	B32523Q8334+***	1560	1600	2160
		0.47	$10.5 \times 20.5 \times 26.5$	B32523Q8474+***	1560	1600	2160
		0.68	$12.0 \times 22.0 \times 26.5$	B32523Q8684+***	–	–	1800

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M =  $\pm 20\%$ 

K =  $\pm 10\%$ 


J =  $\pm 5\%$ 

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 – 1 mm)


**B32524**
**General purpose (wound)**
**Preliminary Data**
**Ordering codes and packing units (lead spacing 27.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$	Ordering code (composition see below)	Ammo pack	Reel	Untaped
V DC	V AC	$\mu F$	mm		pcs./MOQ	pcs./MOQ	pcs./MOQ
63	40	4.7	11.0 × 21.0 × 31.5	B32524R0475+***	–	1400	1280
		6.8	11.0 × 21.0 × 31.5	B32524Q0685+***	–	1400	1280
		10	11.0 × 21.0 × 31.5	B32524R0106+***	–	1400	1280
		15	11.0 × 21.0 × 31.5	B32524R0156+***	–	1400	1280
		22	11.0 × 21.0 × 31.5	B32524R0226+***	–	1400	1280
		33	12.5 × 21.5 × 31.5	B32524R0336+***	–	1200	1120
		47	14.0 × 24.5 × 31.5	B32524R0476+***	–	1000	1040
		68	18.0 × 27.5 × 31.5	B32524R0686+***	–	–	800
		100	22.0 × 36.5 × 31.5	B32524R0107+***	–	–	640
100	63	4.7	11.0 × 21.0 × 31.5	B32524Q1475+***	–	1400	1280
		6.8	11.0 × 21.0 × 31.5	B32524Q1685+***	–	1400	1280
		10	11.0 × 21.0 × 31.5	B32524Q1106+***	–	1400	1280
		15	11.0 × 21.0 × 31.5	B32524Q1156+***	–	1400	1280
		22	13.5 × 23.0 × 31.5	B32524Q1226+***	–	1000	1040
		33	18.0 × 27.5 × 31.5	B32524Q1336+***	–	–	800
		47	19.0 × 30.0 × 31.5	B32524Q1476+***	–	–	720
		68	22.0 × 36.5 × 31.5	B32524Q1686+***	–	–	640
		250	160	1.5	11.0 × 21.0 × 31.5	B32524Q3155+***	–
2.2	11.0 × 21.0 × 31.5			B32524Q3225+***	–	1400	1280
3.3	11.0 × 21.0 × 31.5			B32524Q3335+***	–	1400	1280
4.7	11.0 × 21.0 × 31.5			B32524Q3475+***	–	1400	1280
6.8	11.0 × 21.0 × 31.5			B32524R3685+***	–	1400	1280
10	12.5 × 21.5 × 31.5			B32524R3106+***	–	1200	1120
15	15.0 × 24.5 × 31.5			B32524R3156+***	–	–	960
22	19.0 × 30.0 × 31.5			B32524R3226+***	–	–	720
33	22.0 × 36.5 × 31.5			B32524R3336+***	–	–	640

MOQ = Minimum Order Quantity, consisting of 4 packing units.  
 Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 – 1 mm)


**Preliminary Data**
**Ordering codes and packing units (lead spacing 27.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./MOQ	Untaped pcs./MOQ
V DC	V AC	$\mu F$					
400	200	0.68	11.0 × 21.0 × 31.5	B32524Q6684+***	–	1400	1280
		1.0	11.0 × 21.0 × 31.5	B32524Q6105+***	–	1400	1280
		1.5	11.0 × 21.0 × 31.5	B32524Q6155+***	–	1400	1280
		2.2	11.0 × 21.0 × 31.5	B32524R6225+***	–	1400	1280
		3.3	14.0 × 24.5 × 31.5	B32524R6335+***	–	1000	1040
		4.7	14.0 × 24.5 × 31.5	B32524R6475+***	–	1000	1040
		6.8	18.0 × 27.5 × 31.5	B32524R6685+***	–	–	800
		10	22.0 × 36.5 × 31.5	B32524R6106+***	–	–	640
630	220	0.33	11.0 × 21.0 × 31.5	B32524Q8334+***	–	1400	1280
		0.47	11.0 × 21.0 × 31.5	B32524Q8474+***	–	1400	1280
		0.68	11.0 × 21.0 × 31.5	B32524Q8684+***	–	1400	1280
		1.0	14.0 × 24.5 × 31.5	B32524Q8105+***	–	1000	1040
		1.5	18.0 × 27.5 × 31.5	B32524Q8155+***	–	–	800
		2.2	21.0 × 31.0 × 31.5	B32524Q8225+***	–	–	720

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M =  $\pm 20\%$

K =  $\pm 10\%$


J =  $\pm 5\%$

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 – 1 mm)


**B32526**
**General purpose (wound)**
**Preliminary Data**
**Ordering codes and packing units (lead spacing 37.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./MOQ	Untaped pcs./MOQ
V DC	V AC	$\mu F$					
63	40	22	12.0 × 22.0 × 41.5	B32526R0226+***	—	—	1620
		33	12.0 × 22.0 × 41.5	B32526R0336+***	—	—	1620
		47	12.0 × 22.0 × 41.5	B32526R0476+***	—	—	1620
		68	16.0 × 28.5 × 41.5	B32526R0686+***	—	—	800
		100	18.0 × 32.5 × 41.5	B32526R0107+***	—	—	720
		150	20.0 × 39.5 × 41.5	B32526R0157+***	—	—	640
		220	28.0 × 42.5 × 41.5	B32526R0227A***	—	—	440
100	63	15	12.0 × 22.0 × 41.5	B32526R1156+***	—	—	1620
		22	12.0 × 22.0 × 41.5	B32526R1226+***	—	—	1620
		33	14.0 × 25.0 × 41.5	B32526R1336+***	—	—	1380
		47	16.0 × 28.5 × 41.5	B32526R1476+***	—	—	800
		68	18.0 × 32.5 × 41.5	B32526R1686+***	—	—	720
		100	20.0 × 39.5 × 41.5	B32526R1107+***	—	—	640
		150	28.0 × 42.5 × 41.5	B32526R1157+***	—	—	440
250	160	4.7	12.0 × 22.0 × 41.5	B32526R3475+***	—	—	1620
		6.8	12.0 × 22.0 × 41.5	B32526R3685+***	—	—	1620
		10	12.0 × 22.0 × 41.5	B32526R3106+***	—	—	1620
		15	14.0 × 25.0 × 41.5	B32526R3156+***	—	—	1380
		22	16.0 × 28.5 × 41.5	B32526R3226+***	—	—	800
		33	20.0 × 39.5 × 41.5	B32526R3336+***	—	—	640
		47	20.0 × 39.5 × 41.5	B32526R3476+***	—	—	640
		68	28.0 × 42.5 × 41.5	B32526R3686+***	—	—	440
400	200	3.3	12.0 × 22.0 × 41.5	B32526R6335+***	—	—	1620
		4.7	12.0 × 22.0 × 41.5	B32526R6475+***	—	—	1620
		6.8	14.0 × 25.0 × 41.5	B32526R6685+***	—	—	1380
		10	18.0 × 32.5 × 41.5	B32526R6106+***	—	—	720
		15	20.0 × 39.5 × 41.5	B32526R6156+***	—	—	640
		22	28.0 × 42.5 × 41.5	B32526R6226+***	—	—	440

MOQ = Minimum Order Quantity, consisting of 4 packing units.  
 Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%

J = ±5%

 A = -15 ... +5% (220  $\mu F$  type only)

\*\*\* = Packaging code:


289 = Ammo pack

189 = Reel

000 = Untaped (lead length 6 – 1 mm)

**Preliminary Data**
**Technical data**

Operating temperature range	Max. operating temperature $T_{op,max}$			+125 °C
	Upper category temperature $T_{max}$			+125 °C
	Lower category temperature $T_{min}$			-55 °C
	Rated temperature $T_R$			+85 °C
Dissipation factor $\tan \delta$ (in $10^{-3}$ ) at 20 °C (upper limit values)	at	$C_R \leq 0.1 \mu F$	$0.1 \mu F < C_R \leq 1 \mu F$	$C_R > 1 \mu F$
	1 kHz	8	8	10
	10 kHz	15	15	—
	100 kHz	30	—	—
Insulation resistance $R_{ins}$ or time constant $\tau = C_R \cdot R_{ins}$ at 20 °C, rel. humidity $\leq 65\%$ (minimum as-delivered values)	$V_R$	$C_R \leq 0.33 \mu F$		$C_R > 0.33 \mu F$
	$\leq 100$ V DC	3750 M $\Omega$		1250 s
	$\geq 250$ V DC	7500 M $\Omega$		2500 s
DC test voltage	$1.4 \cdot V_R, 2$ s			
Category voltage $V_C$ (continuous operation with $V_{DC}$ or $V_{AC}$ at $f \leq 60$ Hz)	$T_A$ (°C)	DC voltage derating		AC voltage derating
	$T_A \leq 85$ $85 < T_A \leq 125$	$V_C = V_R$ $V_C = V_R \cdot (165 - T_A) / 80$		$V_{C,RMS} = V_{RMS}$ $V_{C,RMS} = V_{RMS} \cdot (165 - T_A) / 80$
Operating voltage $V_{op}$ for short operating periods ( $V_{DC}$ or $V_{AC}$ at $f \leq 60$ Hz)	$T_A$ (°C)	DC voltage (max. hours)		AC voltage (max. hours)
	$T_A \leq 100$ $100 < T_A \leq 125$	$V_{op} = 1.25 \cdot V_C$ (2000 h) $V_{op} = 1.25 \cdot V_C$ (1000 h)		$V_{op} = 1.0 \cdot V_{C,RMS}$ (2000 h) $V_{op} = 1.0 \cdot V_{C,RMS}$ (1000 h)
Damp heat test Limit values after damp heat test	56 days/40 °C/93% relative humidity			
	Capacitance change $ \Delta C/C $			$\leq 5\%$
	Dissipation factor change $\Delta \tan \delta$			$\leq 5 \cdot 10^{-3}$ (at 1 kHz)
	Insulation resistance $R_{ins}$ or time constant $\tau = C_R \cdot R_{ins}$			$\geq 50\%$ of minimum as-delivered values
Reliability: Failure rate $\lambda$ Service life $t_{SL}$	1 fit ( $\leq 1 \cdot 10^{-9}/h$ ) at $0.5 \cdot V_R, 40$ °C			
	200 000 h at $1.0 \cdot V_R, 85$ °C			
Failure criteria: Total failure Failure due to variation of parameters	For conversion to other operating conditions and temperatures, refer to chapter "Reliability", page .			
	Short circuit or open circuit			
	Capacitance change $ \Delta C/C $			$> 10\%$
	Dissipation factor $\tan \delta$			$> 2 \cdot$ upper limit value
	Insulation resistance $R_{ins}$ or time constant $\tau = C_R \cdot R_{ins}$			$< 150$ M $\Omega$ ( $C_R \leq 0.33 \mu F$ ) $< 50$ s ( $C_R > 0.33 \mu F$ )



B32520 ... B32529

General purpose (stacked/wound)

Preliminary Data

### Pulse handling capability

"dV/dt" represents the maximum permissible voltage change per unit of time for non-sinusoidal voltages, expressed in V/μs.

"k<sub>0</sub>" represents the maximum permissible pulse characteristic of the waveform applied to the capacitor, expressed in V<sup>2</sup>/μs.

Note:

The values of dV/dt and k<sub>0</sub> provided below must not be exceeded in order to avoid damaging the capacitor.

### dV/dt values


Lead spacing	5 mm	7.5 mm	10 mm		15 mm		22.5 mm	27.5 mm	37.5 mm	
Technology	S	S	S	W	S	W	W	W	W	
V <sub>R</sub> V DC	V <sub>RMS</sub> V AC	dV/dt in V/μs								
63	40	250	120	50	–	30	–	3	1	0.8
100	63	300	150	75	–	50	5	4	3	1
250	160	400	200	150	–	100	10	8	5	4
400	200	600	275	175	–	125	–	10	8.5	6
450	200	–	–	–	–	–	20	–	–	–
630	400	800	–	–	20	–	25	15	12	–

S = Stacked, W = Wound

### k<sub>0</sub> values

Lead spacing	5 mm	7.5 mm	10 mm		15 mm		22.5 mm	27.5 mm	37.5 mm	
Technology	S	S	S	W	S	W	W	W	W	
V <sub>R</sub> V DC	V <sub>RMS</sub> V AC	k <sub>0</sub> in V <sup>2</sup> /μs								
63	40	30000	15000	6300	–	3800	–	375	130	100
100	63	60000	30000	15000	–	10000	850	800	600	200
250	160	200000	100000	75000	–	50000	5000	4000	2500	2000
400	200	500000	220000	140000	–	100000	–	10000	8500	6000
450	200	–	–	–	–	–	15000	–	–	–
630	400	1000000	–	–	25000	–	30000	18000	15000	–


S = Stacked, W = Wound




Preliminary Data

**Impedance Z versus frequency f**

(typical values)

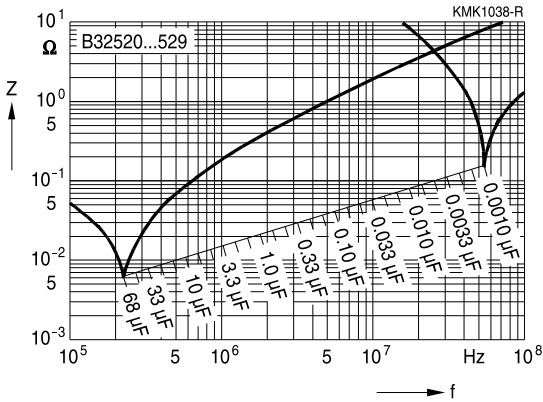



**B32529**

**General purpose (stacked)**


Preliminary Data

**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )**


For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 5 mm**


50 V DC/32 V AC

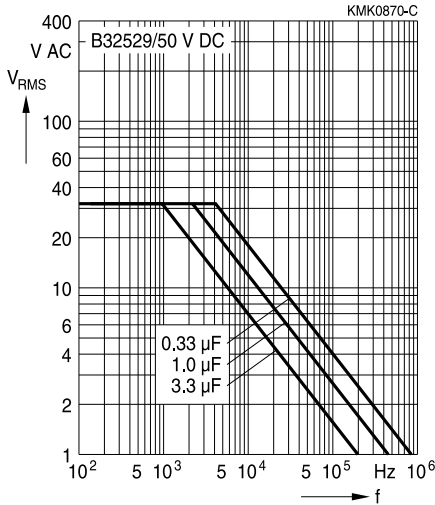


63 V DC/40 V AC

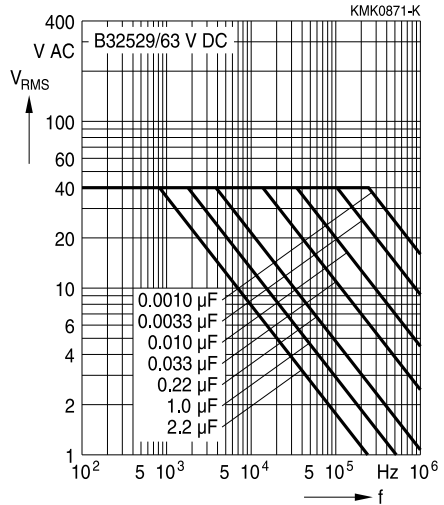


100 V DC/63 V AC

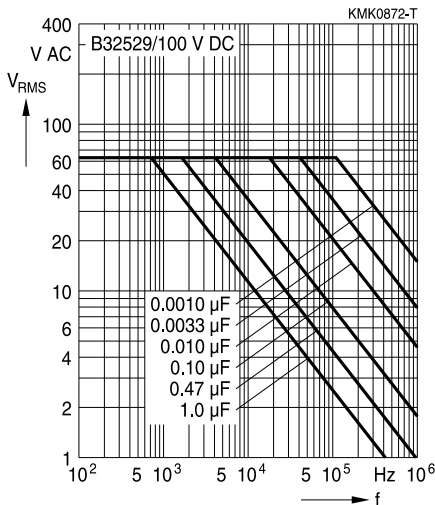

250 V DC/160 V AC

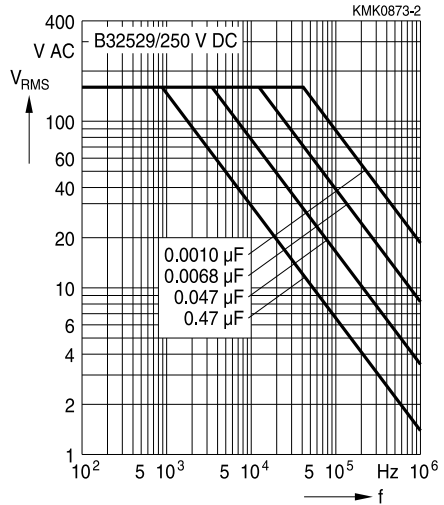






Preliminary Data

Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )


For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.


Lead spacing 5 mm

400 V DC/200 V AC

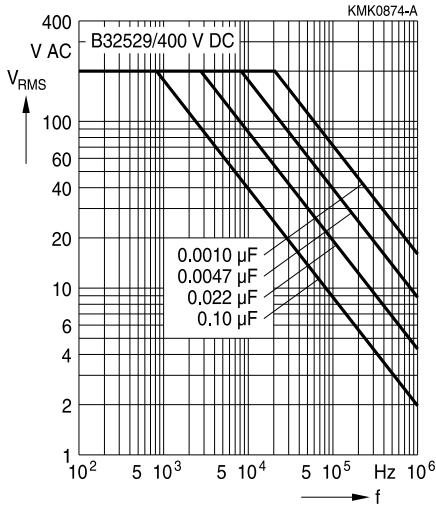

630 V DC/400 V AC

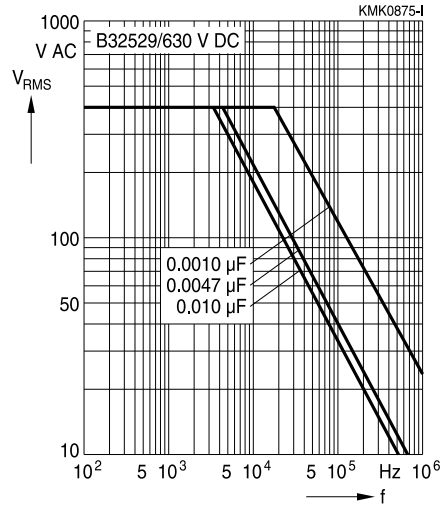



**B32520**

**General purpose (stacked)**


Preliminary Data

**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )**


For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 7.5 mm**


63 V DC/40 V AC

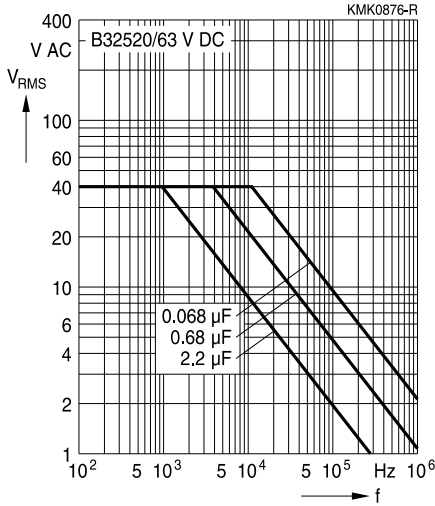


100 V DC/63 V AC

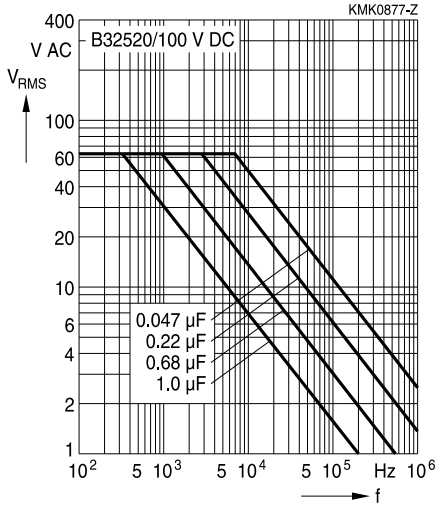


250 V DC/160 V AC

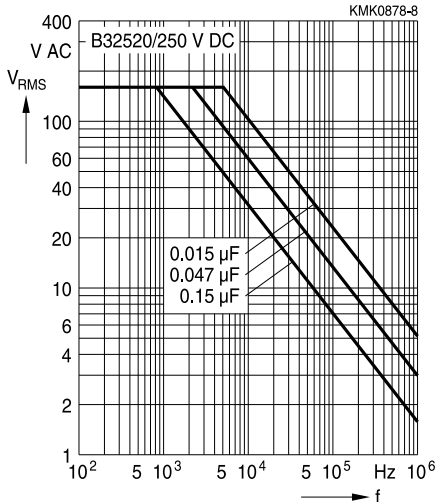

400 V DC/200 V AC

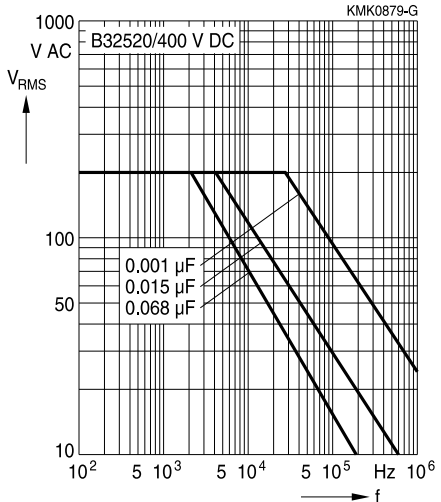




Preliminary Data

Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )


For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.

Lead spacing 10 mm


63 V DC/40 V AC

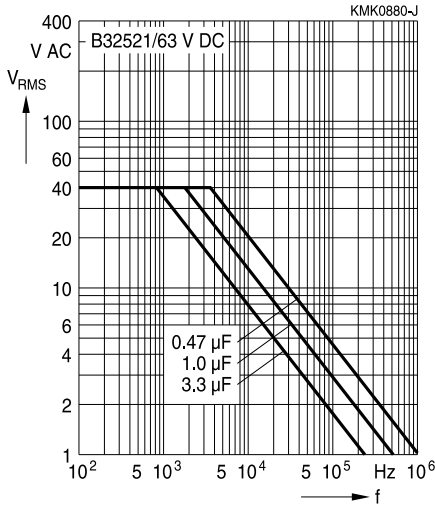


100 V DC/63 V AC

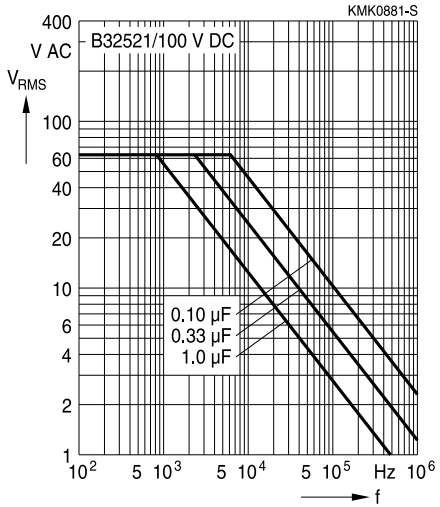


250 V DC/160 V AC

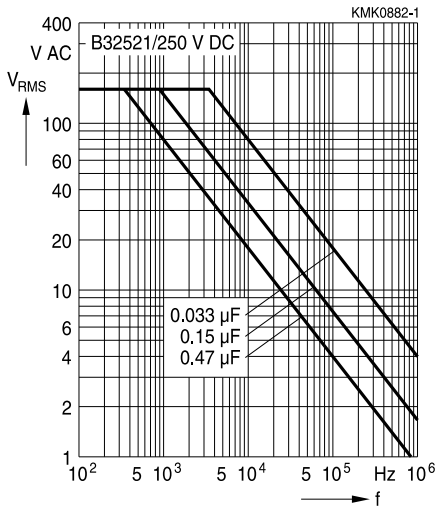

400 V DC/200 V AC

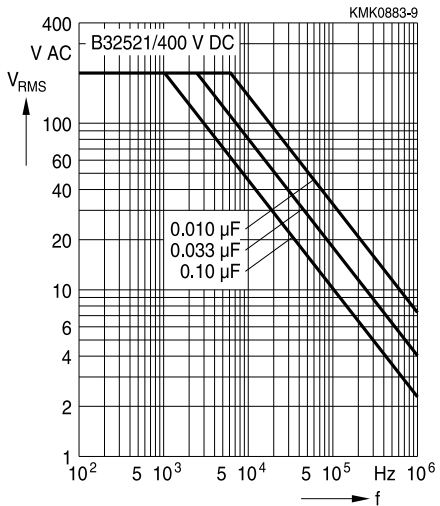



**B32521**

**General purpose (stacked/wound)**


Preliminary Data


**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ\text{C}$ )**

For  $T_A > 55^\circ\text{C}$ , please refer to "General technical information", section 3.2.3.





**Lead spacing 10 mm**


630 V DC/200 V AC

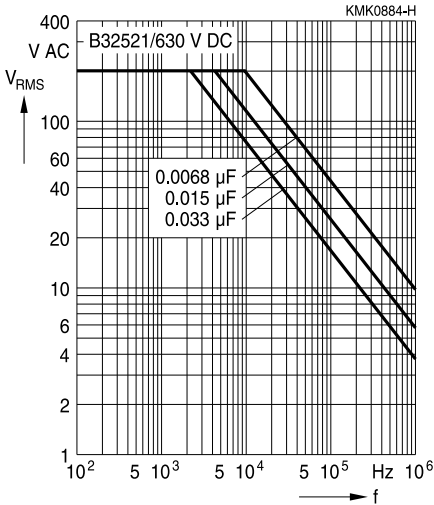


**Preliminary Data**
**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ\text{C}$ )**

 For  $T_A > 55^\circ\text{C}$ , please refer to "General technical information", section 3.2.3.

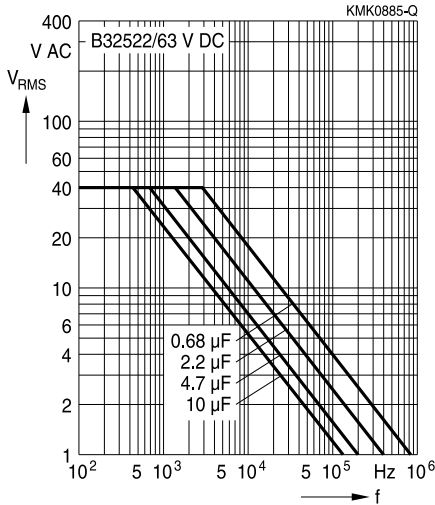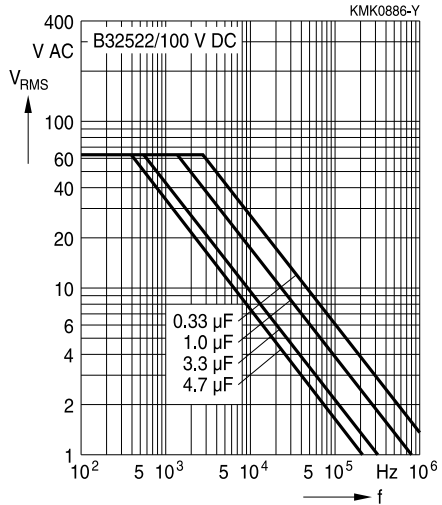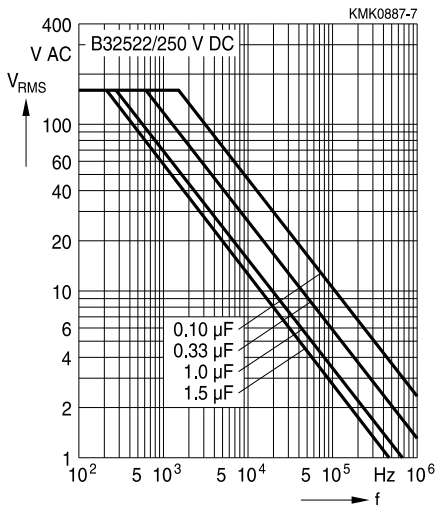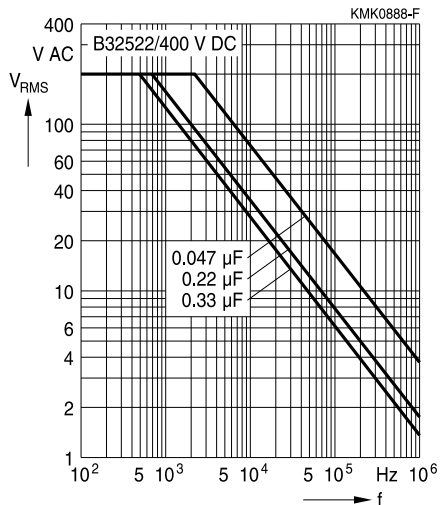**Lead spacing 15 mm**
**63 V DC/40 V AC**

**100 V DC/63 V AC**

**250 V DC/160 V AC**

**400 V DC/200 V AC**




**B32522**

**General purpose (stacked/wound)**


Preliminary Data

**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ\text{C}$ )**


For  $T_A > 55^\circ\text{C}$ , please refer to "General technical information", section 3.2.3.


**Lead spacing 15 mm**

450 V DC/200 V AC




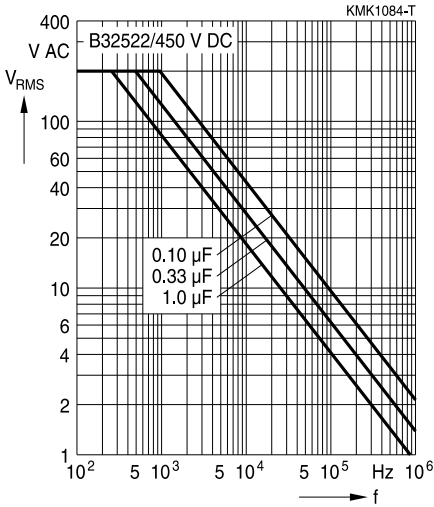



630 V DC/200 V AC

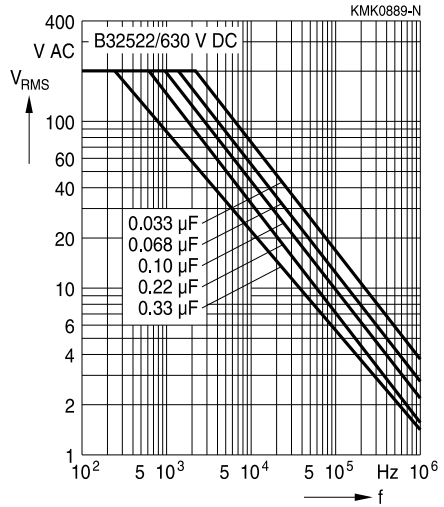


**Preliminary Data**
**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )**

 For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.

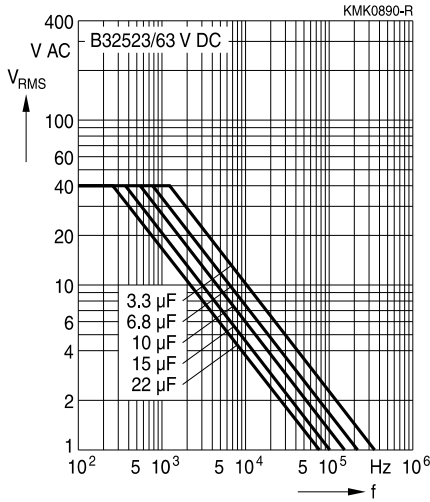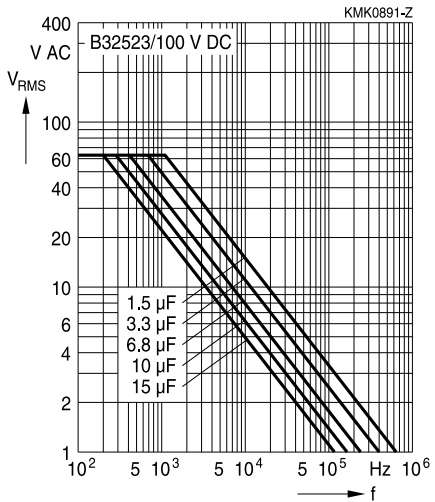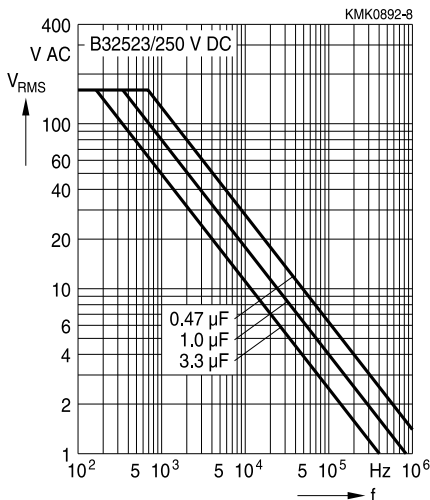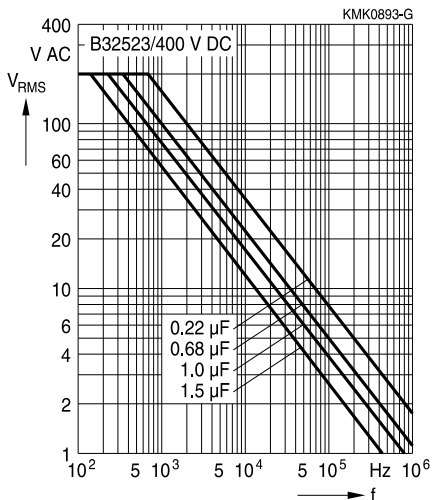**Lead spacing 22.5 mm**
**63 V DC/40 V AC**

**100 V DC/63 V AC**

**250 V DC/160 V AC**

**400 V DC/200 V AC**




**B32523**

**General purpose (wound)**


**Preliminary Data**

**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ\text{C}$ )**


For  $T_A > 55^\circ\text{C}$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 22.5 mm**





**630 V DC/200 V AC**

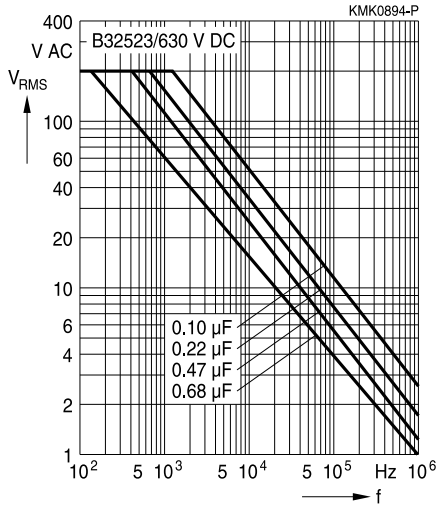





**Preliminary Data**
**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ\text{C}$ )**

 For  $T_A > 55^\circ\text{C}$ , please refer to "General technical information", section 3.2.3.

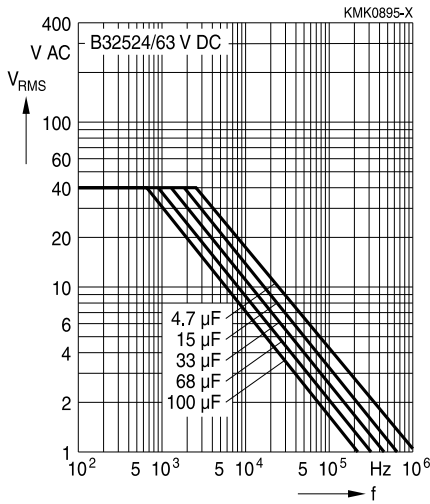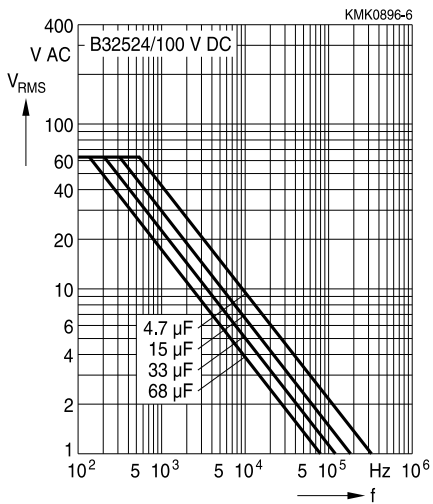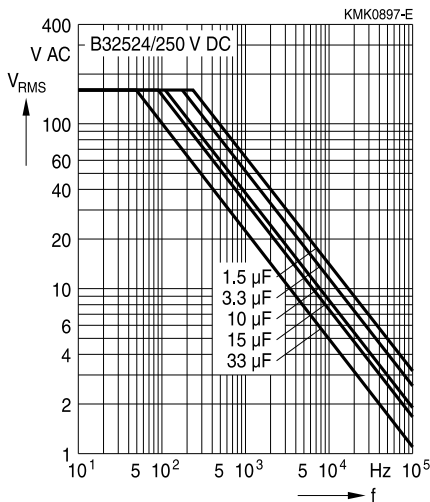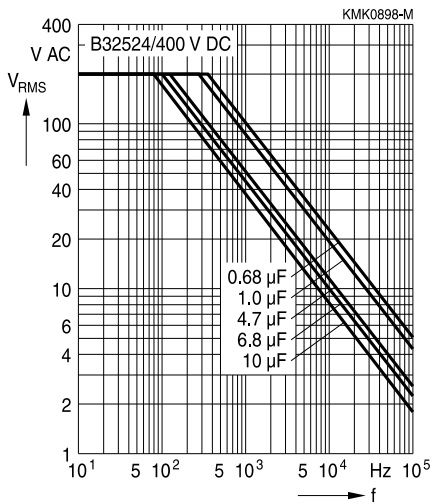**Lead spacing 27.5 mm**
**63 V DC/40 V AC**

**100 V DC/63 V AC**

**250 V DC/160 V AC**

**400 V DC/200 V AC**




**B32524**

**General purpose (wound)**


**Preliminary Data**


**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ\text{C}$ )**

For  $T_A > 55^\circ\text{C}$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 27.5 mm**

**630 V DC/220 V AC**

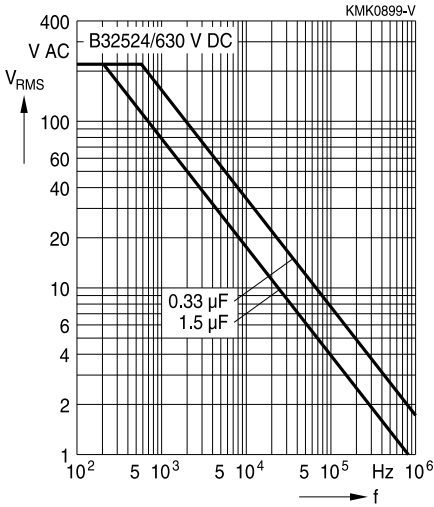




**Preliminary Data**


**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )**  
 For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 37.5 mm**


**63 V DC/40 V AC**

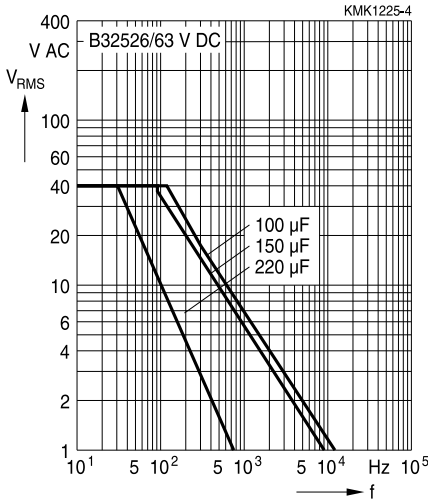


**100 V DC/63 V AC**

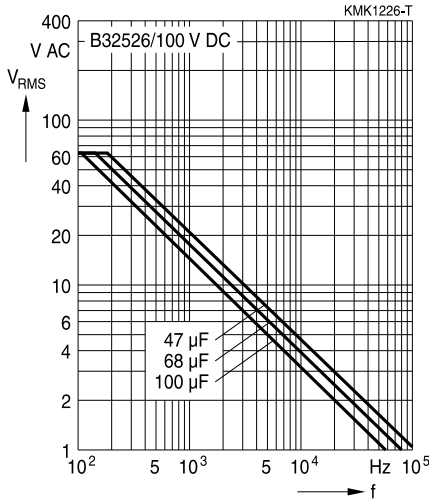


**250 V DC/160 V AC**

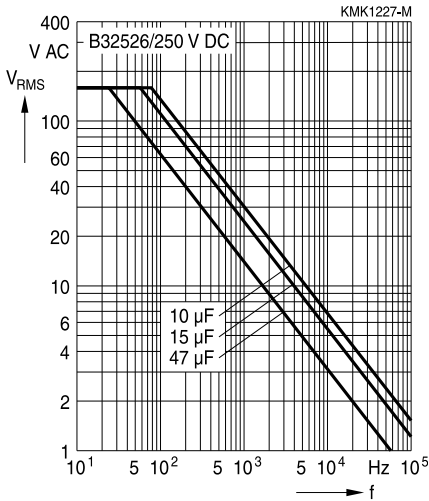

**400 V DC/200 V AC**

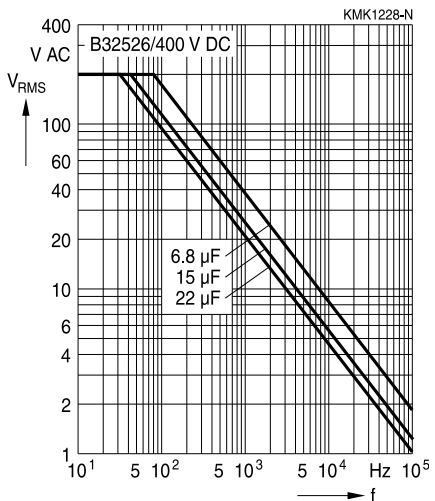



**B32520 ... B32529**

**General purpose (stacked/wound)**

**Preliminary Data**


#### Cautions and warnings

- Do not exceed the upper category temperature (UCT).
- Do not apply any mechanical stress to the capacitor terminals.
- Avoid any compressive, tensile or flexural stress.
- Do not move the capacitor after it has been soldered to the PC board.
- Do not pick up the PC board by the soldered capacitor.
- Do not place the capacitor on a PC board whose PTH hole spacing differs from the specified lead spacing.
- Do not exceed the specified time or temperature limits during soldering.
- Avoid external energy inputs, such as fire or electricity.
- Avoid overload of the capacitors.

**Preliminary Data**

The table below summarizes the safety instructions that must always be observed. A detailed description can be found in the relevant sections of the chapters "General technical information" and "Mounting guidelines".


Topic	Safety information	Reference chapter "General technical information"
Storage conditions	Make sure that capacitors are stored within the specified range of time, temperature and humidity conditions.	4.5 "Storage conditions"
Flammability	Avoid external energy, such as fire or electricity (passive flammability), avoid overload of the capacitors (active flammability) and consider the flammability of materials.	5.3 "Flammability"
Resistance to vibration	Do not exceed the tested ability to withstand vibration. The capacitors are tested to IEC 60068-2-6. EPCOS offers film capacitors specially designed for operation under more severe vibration regimes such as those found in automotive applications. Consult our catalog "Film Capacitors for Automotive Electronics".	5.2 "Resistance to vibration"
Topic	Safety information	Reference chapter "Mounting guidelines"
Soldering	Do not exceed the specified time or temperature limits during soldering.	1 "Soldering"
Cleaning	Use only suitable solvents for cleaning capacitors.	2 "Cleaning"
Embedding of capacitors in finished assemblies	When embedding finished circuit assemblies in plastic resins, chemical and thermal influences must be taken into account. Caution: Consult us first, if you also wish to embed other uncoated component types!	3 "Embedding of capacitors in finished assemblies"


**B32520 ... B32529**
**General purpose (stacked/wound)**
**Preliminary Data**
**Symbols and terms**

Symbol	English	German
$\alpha$	Heat transfer coefficient	Wärmeübergangszahl
$\alpha_C$	Temperature coefficient of capacitance	Temperaturkoeffizient der Kapazität
A	Capacitor surface area	Kondensatoroberfläche
$\beta_C$	Humidity coefficient of capacitance	Feuchtekoeffizient der Kapazität
C	Capacitance	Kapazität
$C_R$	Rated capacitance	Nennkapazität
$\Delta C$	Absolute capacitance change	Absolute Kapazitätsänderung
$\Delta C/C$	Relative capacitance change (relative deviation of actual value)	Relative Kapazitätsänderung (relative Abweichung vom Ist-Wert)
$\Delta C/C_R$	Capacitance tolerance (relative deviation from rated capacitance)	Kapazitätstoleranz (relative Abweichung vom Nennwert)
dt	Time differential	Differentielle Zeit
$\Delta t$	Time interval	Zeitintervall
$\Delta T$	Absolute temperature change (self-heating)	Absolute Temperaturänderung (Selbsterwärmung)
$\Delta \tan \delta$	Absolute change of dissipation factor	Absolute Änderung des Verlustfaktors
$\Delta V$	Absolute voltage change	Absolute Spannungsänderung
dV/dt	Time differential of voltage function (rate of voltage rise)	Differentielle Spannungsänderung (Spannungsflankensteilheit)
$\Delta V/\Delta t$	Voltage change per time interval	Spannungsänderung pro Zeitintervall
E	Activation energy for diffusion	Aktivierungsenergie zur Diffusion
ESL	Self-inductance	Eigeninduktivität
ESR	Equivalent series resistance	Ersatz-Serienwiderstand
f	Frequency	Frequenz
$f_1$	Frequency limit for reducing permissible AC voltage due to thermal limits	Grenzfrequenz für thermisch bedingte Reduzierung der zulässigen Wechselspannung
$f_2$	Frequency limit for reducing permissible AC voltage due to current limit	Grenzfrequenz für strombedingte Reduzierung der zulässigen Wechselspannung
$f_r$	Resonant frequency	Resonanzfrequenz
$F_D$	Thermal acceleration factor for diffusion	Therm. Beschleunigungsfaktor zur Diffusion
$F_T$	Derating factor	Deratingfaktor
i	Current (peak)	Stromspitze
$I_C$	Category current (max. continuous current)	Kategoriestrom (max. Dauerstrom)

**Preliminary Data**

Symbol	English	German
$I_{RMS}$	(Sinusoidal) alternating current, root-mean-square value	(Sinusförmiger) Wechselstrom
$i_z$	Capacitance drift	Inkonstanz der Kapazität
$k_0$	Pulse characteristic	Impuls Kennwert
$L_S$	Series inductance	Serieninduktivität
$\lambda$	Failure rate	Ausfallrate
$\lambda_0$	Constant failure rate during useful service life	Konstante Ausfallrate in der Nutzungsphase
$\lambda_{test}$	Failure rate, determined by tests	Experimentell ermittelte Ausfallrate
$P_{diss}$	Dissipated power	Abgegebene Verlustleistung
$P_{gen}$	Generated power	Erzeugte Verlustleistung
$Q$	Heat energy	Wärmeenergie
$\rho$	Density of water vapor in air	Dichte von Wasserdampf in Luft
$R$	Universal molar constant for gases	Allg. Molarkonstante für Gas
$R$	Ohmic resistance of discharge circuit	Ohmscher Widerstand des Entladekreises
$R_i$	Internal resistance	Innenwiderstand
$R_{ins}$	Insulation resistance	Isolationswiderstand
$R_P$	Parallel resistance	Parallelwiderstand
$R_S$	Series resistance	Serienwiderstand
$S$	severity (humidity test)	Schärfegrad (Feuchtest)
$t$	Time	Zeit
$T$	Temperature	Temperatur
$\tau$	Time constant	Zeitkonstante
$\tan \delta$	Dissipation factor	Verlustfaktor
$\tan \delta_D$	Dielectric component of dissipation factor	Dielektrischer Anteil des Verlustfaktors
$\tan \delta_P$	Parallel component of dissipation factor	Parallelanteil des Verlustfaktors
$\tan \delta_S$	Series component of dissipation factor	Serienanteil des Verlustfaktors
$T_A$	Ambient temperature	Umgebungstemperatur
$T_{max}$	Upper category temperature	Obere Kategorietemperatur
$T_{min}$	Lower category temperature	Untere Kategorietemperatur
$t_{OL}$	Operating life at operating temperature and voltage	Betriebszeit bei Betriebstemperatur und -spannung
$T_{op}$	Operating temperature	Betriebstemperatur
$T_R$	Rated temperature	Nenntemperatur
$T_{ref}$	Reference temperature	Referenztemperatur
$t_{SL}$	Reference service life	Referenz-Lebensdauer
$V_{AC}$	AC voltage	Wechselspannung


**B32520 ... B32529**
**General purpose (stacked/wound)**
**Preliminary Data**

Symbol	English	German
$V_C$	Category voltage	Kategoriespannung
$V_{C,RMS}$	Category AC voltage	(Sinusförmige) Kategorie-Wechselspannung
$V_{CD}$	Corona-discharge onset voltage	Teilentlade-Einsatzspannung
$V_{ch}$	Charging voltage	Ladespannung
$V_{DC}$	DC voltage	Gleichspannung
$V_{FB}$	Fly-back capacitor voltage	Spannung (Flyback)
$V_i$	Input voltage	Eingangsspannung
$V_o$	Output voltage	Ausgangssspannung
$V_{op}$	Operating voltage	Betriebsspannung
$V_p$	Peak pulse voltage	Impuls-Spitzenspannung
$V_{pp}$	Peak-to-peak voltage Impedance	Spannungshub
$V_R$	Rated voltage	Nennspannung
$\hat{V}_R$	Amplitude of rated AC voltage	Amplitude der Nenn-Wechselspannung
$V_{RMS}$	(Sinusoidal) alternating voltage, root-mean-square value	(Sinusförmige) Wechselspannung
$V_{SC}$	S-correction voltage	Spannung bei Anwendung "S-correction"
$V_{sn}$	Snubber capacitor voltage	Spannung bei Anwendung "Beschaltung"
$Z$	Impedance	Scheinwiderstand
$e$	Lead spacing	Rastermaß



## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSSP, CTVS, DSSP, MiniBlue, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseMod, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).